# LED-UL

E11

# ASSEMBLY INSTRUCTIONS


USA & CANADA

## WARNING!

Be sure electrical power is OFF before and during installation or maintenance.
The luminaire must be installed by a qualified electrician, in accordance with all applicable local codes.

Ensure that the rated luminaire voltage requirements are compatible with the available mains supply in which it will be installed.
All LEDS are included in your lamp. Never touch the LED surface with your bear hands as this may reduce the life of your LED.
Do not alter, relocate or remove any electrical component.

| Ref. | Wattage |
|---|---|
| 504 | 16W |
| 529 | 20W |
| 528 | 32W |
| 5038 | 32W |
| 5039 | 36W |
| 5040 | 56W |
| 5041 | 72W |
| 5042 | 72W |
| 5033 | 36W |
| 5034 | 32W |
| 5035 | 56W |
| 5036 | 72W |
| 5037 | 84W |
| 5063 | 16W |
| 590 | 32W |
| 594 | 32W |
| 595 | 48W |
| 5112 | 20W |
| 5113 | 32W |

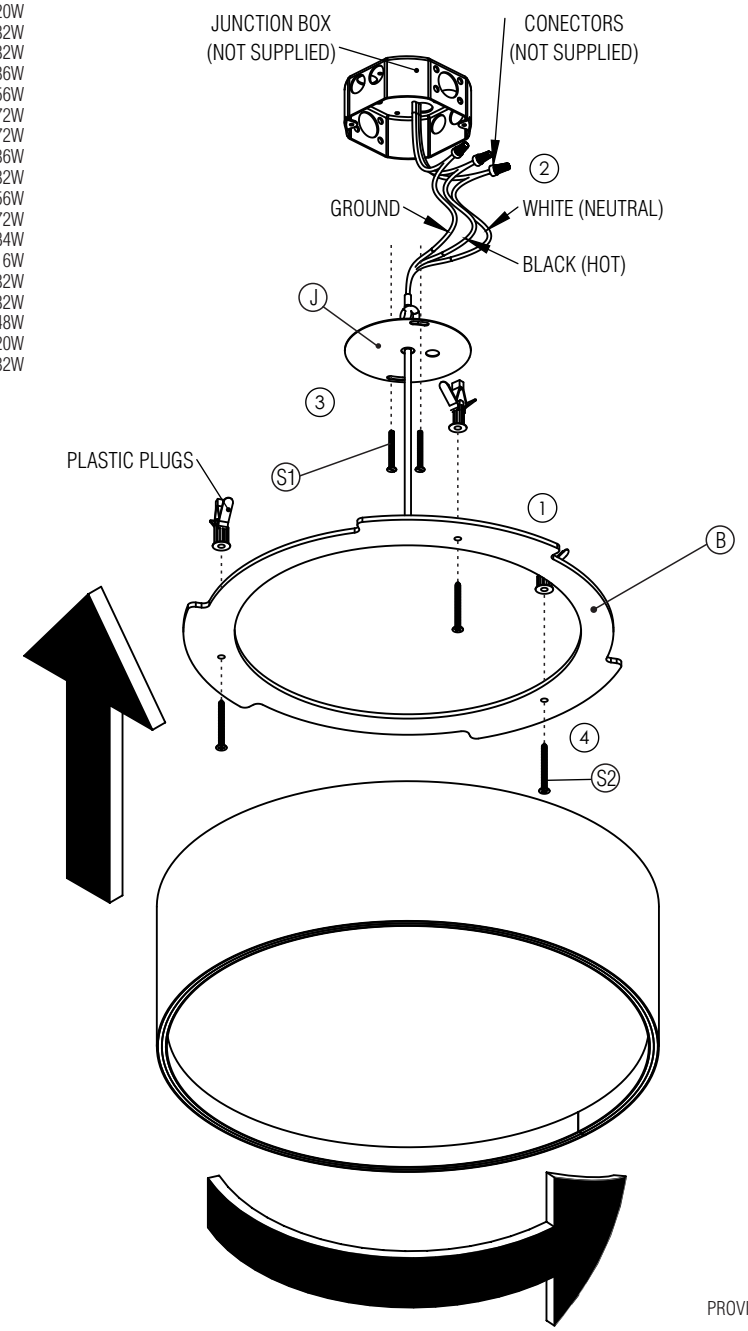


ø8mm /
ø5/16"

Input voltage: 120-277 V
Input frequency: 60 Hz
Isolation: Class II

Material: Natural Wood Veneer MDF and Acrylic

Turn off the electrical power before starting the installation, and keep it turned off until the installation is completed.

This assembly may require the work of two people so it can be secure and well executed

1. Using the support base (B) as template, position and drill the fixation holes in the ceiling with an 8mm drill, and insert the plastic bushings in the holes, to support the luminaire.

2. Make the electrical connections in compliance with all the safety standards and local electrical codes.
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product, and the hazards involved.

3. Using the (S1) screws, fixate the junction box cover (J) to the junction box.


4. Fixate the (S2) screws into the support base and bushings securing it to the ceiling.
Bring the fixture close to the support base (B), fit them together, and rotate the fixture in the support base to lock it.
Make sure everything is well secured.

Turn on the electrical power.

The luminaire is ready for use.

DIMMER COMPATIBILITY
The LED driver included with this fixture is designed to operate with most standard dimmers. All power ratings and installation instructions from dimmer manufacturers' instruction sheets must be followed.

PROVIDED SCREWS



S1 S2

## ATENTION!

FAILURE TO COMPLY WITH THESE INSTRUCTIONS MAY CAUSE ACCIDENTS AND LOSS OF PRODUCT WARRANTY.
Its recommended to read these instructions completely and carefully before proceeding.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

ACCORD Lighting guarantees coverage against manufacturing defects including electrical components and finishes, for a period of three years, under normal use, from the date of purchase. For warranty service, please contact your local dealer for further instructions. Proof of date of purchase will be required for validation of warranty service.

The responsability of the manufacturer regarding the product warranty is related to the correct observation of the instructions contained in this manual.
The manufacturer is not responsible for any damage to the product caused by accidents, alterations of any kind, improper usage or improper installation.
See the website for additional warranty details.

ACCORD Lighting reserves the right to change the dimensions and specifications contained in this manual without prior notice, in accordance with its policy of continuous product improvement. Please, contact the manufacturer if additional information is necessary. The illustrations in this manual are for guidance only and may vary in scale, dimensions and model details.