
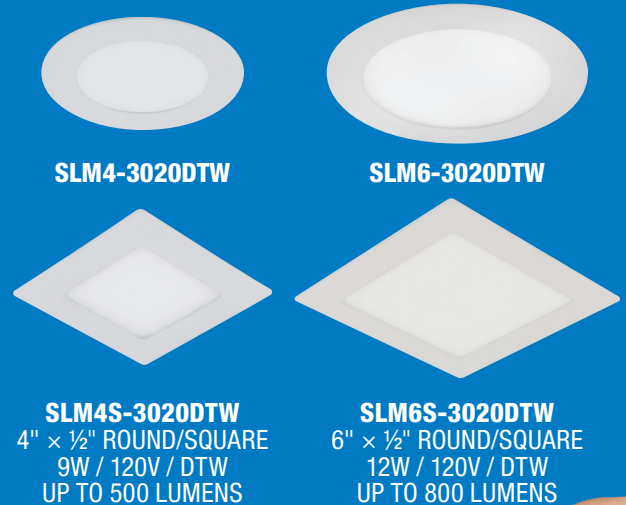


SLIMLED™ DTW

Recessed Light - Dim to Warm

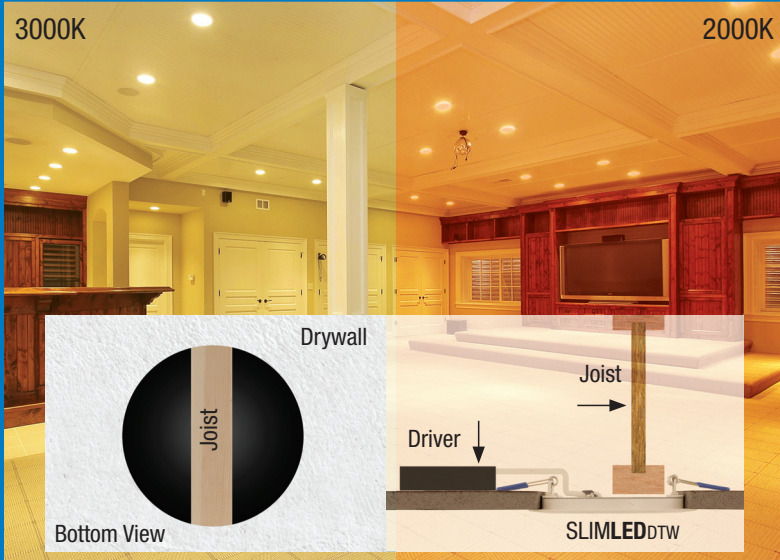

Dim to Warm LED Fixtures

The next piece of the LED Lighting puzzle

Today's LEDs can be used in virtually any lighting application with greatly improved colour quality and warm CCTs at high CRI levels. When fixtures are being used on a dimmer, as the light level drops, today's LEDs maintain the same colour temperature that they exhibit at full power. Incandescent and halogen lamps dim to a warmer CCT at lower levels.

Dim-to-warm technology is now available in LED lighting fixtures they can deliver 3000°K CCT light at full power yet smoothly reduce the CCT to the 2000°K range at the lowest dimming light levels. This technology was designed to mimic the incandescent and halogen lamps that dim to a warmer colour temperature using the same low-cost triac dimmers.

Features

- LED technology fits anywhere you need general light source
- No Recessed fixture required
- Slim ½" thickness design
- Ideal for drop ceilings
- I.C. rated for direct contact with insulation
- Easy to install yourself
- Perfect solution where joists or duct work would normally prevent recessed installation
- Lifetime Warranty
- Damp location rated for soffit applications
- Dim to warm, 3000°K ~ 2000°K
- Integrated LED fixtures



Dimmable



Indoor



3000°K~2000°K
Colour Temp



Damp
Location



120°
Beam Angle



IC Rated



For more information on Lifetime Warranty program, please visit www.liteline.com/goldlabel

Ordering Guide

Part #	Description	UPC	Case Qty.	Master Qty.
SlimLED™ Dim to Warm Kits				
4" Round Kit, 9W, Up to 500 Lumens				
SLM4-3020DTW-BK	4" SlimLED fixture and driver, Round, 9W, 120V, 3000°K~2000°K, black	771250108593	12	48
SLM4-3020DTW-BN	4" SlimLED fixture and driver, Round, 9W, 120V, 3000°K~2000°K, brushed nickel	771250108609	12	48
SLM4-3020DTW-WH	4" SlimLED fixture and driver, Round, 9W, 120V, 3000°K~2000°K, white	771250108616	12	48
4" Square Kit, 9W, Up to 500 Lumens				
SLM4S-3020DTW-BK	4" SlimLED fixture and driver, Square, 9W, 120V, 3000°K~2000°K, black	771250108708	12	48
SLM4S-3020DTW-BN	4" SlimLED fixture and driver, Square, 9W, 120V, 3000°K~2000°K, brushed nickel	771250108715	12	48
SLM4S-3020DTW-WH	4" SlimLED fixture and driver, Square, 9W, 120V, 3000°K~2000°K, white	771250108722	12	48
6" Round Kit, 12W, Up to 800 Lumens				
SLM6-3020DTW-BK	6" SlimLED fixture and driver, Round, 12W, 120V, 3000°K~2000°K, black	771250108739	12	24
SLM6-3020DTW-BN	6" SlimLED fixture and driver, Round, 12W, 120V, 3000°K~2000°K, brushed nickel	771250108746	12	24
SLM6-3020DTW-WH	6" SlimLED fixture and driver, Round, 12W, 120V, 3000°K~2000°K, white	771250108753	12	24
6" Square Kit, 12W, Up to 800 Lumens				
SLM6S-3020DTW-BK	6" SlimLED fixture and driver, Square, 12W, 120V, 3000°K~2000°K, black	771250108845	12	24
SLM6S-3020DTW-BN	6" SlimLED fixture and driver, Square, 12W, 120V, 3000°K~2000°K, brushed nickel	771250108852	12	24
SLM6S-3020DTW-WH	6" SlimLED fixture and driver, Square, 12W, 120V, 3000°K~2000°K, white	771250108869	12	24
Accessories				
SLM-60-FC	60" Flexible connector, for use with SlimLED series fixtures.	771250976079	12	48
P-4020	4" Pre-mounting plate, for use with SLM4 series.	771250977397	–	50
P-4020S	4" Pre-mounting plate, for use with SLM4S series.	771250977410	–	50
P-6020	6" Pre-mounting plate, for use with SLM6 series.	771250976093	–	30
P-6020S	6" Pre-mounting plate, for use with SLM6S series.	771250977403	–	30
P-NCMK-1	New construction mounting kit, includes hanger bars, brackets and screws.	771250224316	–	64
SLM4-XLRING-WH	Extra large trim ring, for use with SLM4 series, plastic, white.	771250195371	12	48
SLM6-XLRING-WH	Extra large trim ring, for use with SLM6 series, plastic, white.	771250195388	12	24
VBE-1	Vapour barrier extender for 4" & 6" fixtures. For use in new construction applications.	771250094942	–	50
VBE-2	Vapour barrier extender for 4" fixtures. For use in remodel applications.	771250971388	–	50
VBE-3	Vapour barrier extender for 4" & 6" fixtures. For use in remodel applications.	771250976086	–	50
VBE-4	Vapour barrier extender for 4" & 6" fixtures. For use in remodel applications.	771250190895	–	50

