



LED BACK-LIT PANEL

BLP series

► **DESIGN** - LED BACK-LIT PANEL comes with a durable commercial grade housing resistant to rust and impact, anti-corrosion aluminum seamless rigid frame, anti-glare PS lens, and 0-10V dimmable driver with circuit overload, short circuit, and low-voltage protection, making it both safe and reliable. It is designed to operate on 120-277V circuits.

► **VARIETY** - The panels come in 1x4ft, 2x2ft and 2x4ft sizes.

► **COLOR AND POWER SELECTABLE** - You can choose either a 3,500K neutral white, 4,000K cool white or 5,000K daylight color temperature and change the power with a simple switch.



► **APPLICATION** - Perfect commercial or industrial solution for offices, hospitals, schools, retail, workshops, and many other applications. It is also Damp Locations rated.

► **ADVANTAGES** - With calculated lifespan up to 180,000 hours, these fixtures are made to last decades under normal operation! ASD provides a 5-year limited warranty along with UL and DLC Premium certifications to guarantee top quality products and safety!

► OPTIONS:

MODELS WITH MOTION SENSOR - The built-in magnet microwave motion sensor will turn off the fixture automatically when no motion is detected. The sensor settings can be easily adjusted using the remote control. You can also easily replace the built-in regular sensor with its NLS modification with ASD NLS APP smart control (sold separately).

MODELS WITH BATTERY BACK-UP - The built-in battery back-up provide 90 minutes of power in case of emergency.

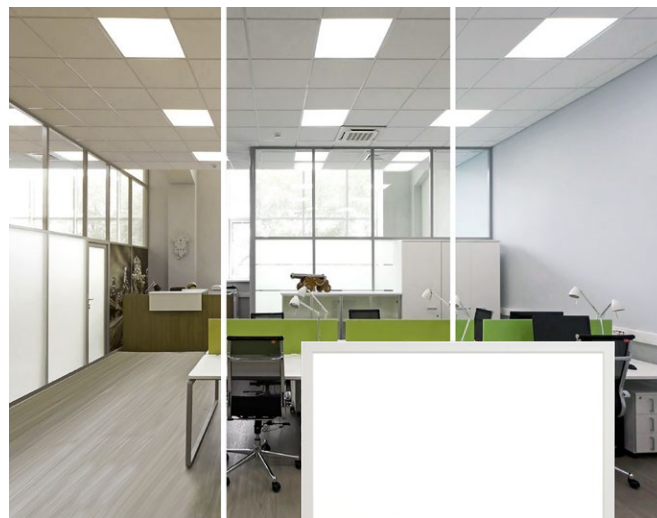

PRODUCT PRESENTATION:

Model	Power	Sensor base	Voltage	Dimming	Lumens	CCT	Finish	Dimensions	Pre-installed	Certification
BLP										
ASD-BLP-14A40-4P	25/30/40W	-	120-277V	0-10V	5,137lm	3,500/4,000/5,000K	White	47-3/4" x 11-7/8" x 1-3/8"	-	UL(E473854),DLC Premium
ASD-BLP-22A30-4P	20/25/30W	-	120-277V	0-10V	3,633lm	3,500/4,000/5,000K	White	23-3/4" x 23-3/4" x 1-3/8"	-	UL(E473854),DLC Premium
ASD-BLP-24A40-4P	25/30/40W	-	120-277V	0-10V	5,025lm	3,500/4,000/5,000K	White	47-3/4" x 23-3/4" x 1-3/8"	-	UL(E473854),DLC Premium
ASD-BLP-24A50-4P	30/40/50W	-	120-277V	0-10V	6,341lm	3,500/4,000/5,000K	White	47-3/4" x 23-3/4" x 1-3/8"	-	UL(E473854),DLC Premium
ASD-BLP-24A67-4P	38/45/51/67W	-	120-277V	0-10V	10,642lm	3000/3,500/4,000/5,000/6,500K	White	47-3/4" x 23-3/4" x 1-3/8"	-	UL(E473854),DLC Premium
BLP-MS WITH MOTION SENSOR										
ASD-BLP-22A30-MS-2P	20/25/30W	-	120-277V	0-10V	3,633lm	3,500/4,000/5,000K	White	23-3/4" x 23-3/4" x 1-3/8"	Motion sensor	UL (E473854), DLC Premium
ASD-BLP-24A40-MS	25/30/40W	-	120-277V	0-10V	5,025lm	3,500/4,000/5,000K	White	47-3/4" x 23-3/4" x 1-3/8"	Motion sensor	UL (E473854), DLC Premium
BLP-EM WITH BATTERY BACK-UP										
ASD-BLP-22A30-8EM-2P	20/25/30W	-	120-277V	0-10V	3,573lm	3,500/4,000/5,000K	White	23-3/4" x 23-3/4" x 1-3/8"	Battery back-up 8W	UL (E473854), DLC Premium
ASD-BLP-24A40-8EM-2P	25/30/40W	-	120-277V	0-10V	5,025lm	3,500/4,000/5,000K	White	47-3/4" x 23-3/4" x 1-3/8"	Battery back-up 8W	UL (E473854), DLC Premium
BLP-QB-EM WITH Q-BASE AND BATTERY BACK-UP										
ASD-BLP-22A30-QB-8EM-2P	20/25/30W	Magnet base	120-277V	0-10V	3,633lm	3,500/4,000/5,000K	White	23-3/4" x 23-3/4" x 1-3/8"	Battery back-up 8W	UL (E473854), DLC Premium
ASD-BLP-24A40-QB-8EM-2P	25/30/40W	Magnet base	120-277V	0-10V	5,025lm	3,500/4,000/5,000K	White	47-3/4" x 23-3/4" x 1-3/8"	Battery back-up 8W	UL (E473854), DLC Premium

For detailed luminous flux information please refer to Annex 1, page 5.

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com





LED BACK-LIT PANEL

BLP series

TECHNICAL PARAMETERS:

Model	Max input current	Inrush current	Work environment	Operating temperature	Power factor	Beam Angle	Surge protection	Housing	Lens	CRI
BLP										
ASD-BLP-14A40-4P	0.5 A	75 A	Damp location	-4°F to 122°F (-20°C to 50°C)	> 0.9	110°	2 kV	Steel, Aluminum	PS	> 80
ASD-BLP-22A30-4P	0.35 A	75 A	Damp location	-4°F to 122°F (-20°C to 50°C)	> 0.9	110°	2 kV	Steel, Aluminum	PS	> 80
ASD-BLP-24A40-4P	0.42 A	75 A	Damp location	-4°F to 122°F (-20°C to 50°C)	> 0.9	110°	2 kV	Steel, Aluminum	PS	> 80
ASD-BLP-24A50-4P	0.42 A	75 A	Damp location	-4°F to 122°F (-20°C to 50°C)	> 0.9	110°	2 kV	Steel, Aluminum	PS	> 80
ASD-BLP-24A67-4P	0.67 A	60 A	Damp location	-4°F to 122°F (-20°C to 50°C)	> 0.9	110°	2 kV	Steel, Aluminum	PS	> 80
BLP-MS WITH MOTION SENSOR										
ASD-BLP-22A30-MS-2P	0.35 A	75 A	Damp location	-4°F to 122°F (-20°C to 50°C)	> 0.9	110°	2 kV	Steel, Aluminum	PS	> 80
ASD-BLP-24A40-MS	0.42 A	75 A	Damp location	-4°F to 122°F (-20°C to 50°C)	> 0.9	110°	2 kV	Steel, Aluminum	PS	> 80
BLP-EM WITH BATTERY BACK-UP										
ASD-BLP-22A30-8EM-2P	0.35 A	75 A	Damp location	-4°F to 122°F (-20°C to 50°C)	> 0.9	110°	2 kV	Steel, Aluminum	PS	> 80
ASD-BLP-24A40-8EM-2P	0.42 A	75 A	Damp location	-4°F to 122°F (-20°C to 50°C)	> 0.9	110°	2 kV	Steel, Aluminum	PS	> 80
BLP-QB-EM WITH Q-BASE AND BATTERY BACK-UP										
ASD-BLP-22A30-QB-8EM-2P	0.35 A	75 A	Damp location	-4°F to 122°F (-20°C to 50°C)	> 0.9	110°	2 kV	Steel, Aluminum	PS	> 80
ASD-BLP-24A40-QB-8EM-2P	0.42 A	75 A	Damp location	-4°F to 122°F (-20°C to 50°C)	> 0.9	110°	2 kV	Steel, Aluminum	PS	> 80


DIMMING COMPATIBLE CONTROLS:

Brand	Lutron			Legrand
Models	NTSTV-DV	DS710	NFTV	RH4FBL3PW
	DVSTV	IP710		

PACKAGE CONTENTS:

Description	Quantity
LED Back-Lit Panel	1 (2 for 2P; 4 for 4P)
Box	1

ACCESSORIES (sold separately):

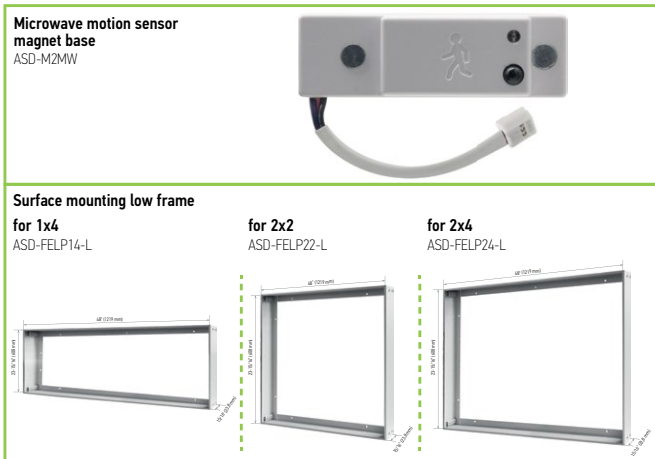

ACCESSORY COMPATIBILITY LIST:

Accessories	Models			
	Microwave motion sensor magnet base ASD-M2MW	Surface mounting low frame for 1x4 panels ASD-FELP14-L	Surface mounting low frame for 2x2 panels ASD-FELP22-L	Surface mounting low frame for 2x4 panels ASD-FELP24-L
ASD-BLP-14A40-4P		•		
ASD-BLP-22A30-4P			•	
ASD-BLP-24A40-4P				•
ASD-BLP-24A50-4P				•
ASD-BLP-24A67-4P				•
ASD-BLP-22A30-MS-2P			•	
ASD-BLP-24A40-MS				•
ASD-BLP-22A30-8EM 2P			•	
ASD-BLP-22A30-8EM 2P				•
ASD-BLP-22A30-QB-8EM-2P	•		•	
ASD-BLP-24A40-QB-8EM-2P	•			•

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com





LED BACK-LIT PANEL

BLP series

MOTION SENSOR INFORMATION



ASD-M2MW
Microwave motion
sensor magnet


+



ASD-06RC
Remote control

Specifications		Default setting
Detection area	25 %/50 %/75 %/100 %	100 %
Hold time	5 s/30 s/1 min/3 min/5 min/10 min/20 min/30 min	10 min
Daylight threshold	2 lux (0.2 fc)/10 lux (0.9 fc)/30 lux (2.8 fc)/50 lux (4.7 fc)/80 lux (7.4 fc)/120 lux (11.2 fc)/disable	Disable
Standby period	0 s/10 s/30 s/1 min/5 min/10 min/30 min/+ ∞	0 s
Standby dimming level	10 %/20 %/30 %/50 %	10 %
Operating voltage	10.5 - 15 V	-
Operating current	< 30 mA	-
Mounting height	max 16.4 ft (5 m)	-
Detection range	> 13.1 ft (4 m)	-
Operating frequency	5.8 GHz ± 75 MHz	-
Transmitting power	< 0.3 mW	-

MICROWAVE MOTION SENSOR:

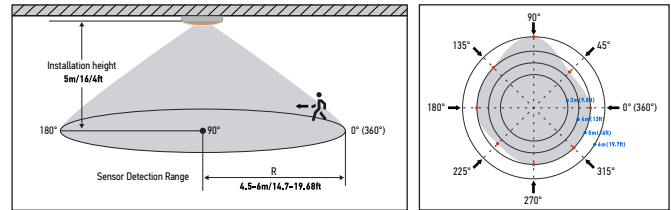

Sensitivity	0°/360°	45°	90°	135°	180°	225°	270°	315°
100%5m	5	4.5	6	5	5	4.5	5	5

User notes:

1. Microwaves can penetrate walls or glass thinner than 0.8" but will be impaired if thicker than 0.8".
2. The driver voltage shall be stable and float within 10 %.
3. Detection area will be affected by speed of motion, mounting height and movement volume.
4. Conduct testing with adequate ambient lighting for best results.
5. Dimming performance differs when connected to different drivers; If the driver can't completely turn OFF, sensor can't either.
6. The first time powered ON sensor, light will be ON 100% for about 10S then dims to standby level or OFF.

Installation precautions:

1. Suitable for ceiling mount installation, adjust sensitivity properly if it's installed on side-wall because it gets more sensitive.
2. Make sure the microwave module is completely exposed.
3. The detection surface of the sensor module should be installed facing the detection area.

Application environment:

1. Suitable for indoor application, half/completely outdoor environment conditions might trigger the sensor.
2. Shall be mounted securely, to avoid any false triggers caused by movement of the fixture itself.
3. Keep the sensor module away from AC input and DC output to avoid high/low frequency signal interference.

REMOTE CONTROL ASD-06RC sold separately



Button	Remarks	Button	Remarks	Button	Remarks
ON/OFF ON/OFF	Turn the sensor ON/OFF.	Auto Auto	Enter "sensor mode" and perform previous settings.	Reset Reset	Enter "sensor mode" and perform the default settings.
Scenes Scenes	Shows current settings saved in remote.	Start Start	Press this to begin scene setup.	Memory Memory	Saves the scene settings.
Apply Apply	Applies current scene settings to the fixture.	M H Mounting height	Adjust detection area/sensitivity levels according to real installation situations, higher or lower.	Send Send	Memorize and send out the previous setting of individual parameters.
Detection range	Also known as "sensitivity". 100 % means the highest sensitivity and longest distance. Use this button and the + - buttons to adjust.	Daylight sensor	The preset lux level at which motion will be detected. Use this button and the + - buttons to adjust.	Stand-by dimming	After hold time, the light will dim from 100 % to optional standby dimming levels. Use this button and the + - buttons to adjust.
Hold time	The period that light will stay illuminated 100 % after no motion is detected. Use this button and the + - buttons to adjust.	Up	The main functional buttons to adjust the factors to desired level. Press + - button to dim light directly auto in non-detection mode.	Stand-by period	The period after holdtime, during which the light keeps standby dimming levels. Use this button and the + - buttons to adjust.
CCT CCT selectable	Not applicable to this product.	Down		POWER Power	Adjust brightness in both ON/OFF mode & sensor mode, minimum 10%, max 100%, each time this button is pressed it changes by 5%.
Reserved button	Not applicable to this product.	Daylight harvesting	Daylight harvesting function enabled or disabled.	Test Test button	Press this button to test the sensor; it will temporarily change the hold time to 2s. This setting cannot be saved.

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com






LED BACK-LIT PANEL

BLP series


WITH DUSK/DAWN FUNCTION:

1. With insufficient ambient brightness, sensor turns on light and keeps it at standby dimming level even if there is no motion or presence.
2. When sensor detects motion or presence it will bring the light level up to 100 %.
3. After motion is no longer detected, fixture remains at 100 % for hold time.
4. After the preset hold time period, it will dim to the standby dimming level and maintain it indefinitely.
5. With sufficient ambient brightness, sensor will turn OFF light automatically.

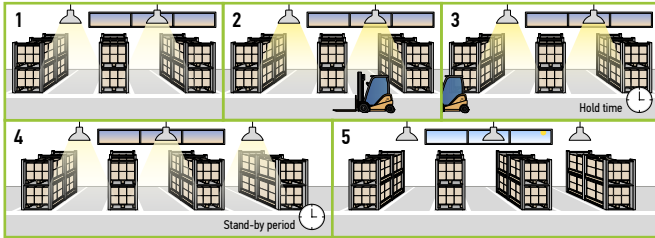


WITH DAYLIGHT DISABLED:

1. Sensor turns ON light when motion is detected.
2. Light will stay on after detecting motion for the desired hold time.
3. Sensor dims light to standby dimming level after hold time if there is still no motion.
4. Sensor turns OFF light after standby period.

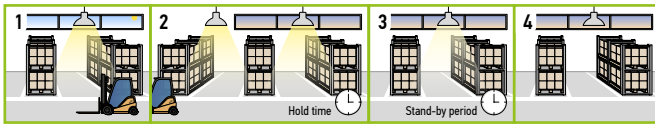


WITH DAYLIGHT THRESHOLD:

1. With sufficient daylight, the light remains OFF even after motion is detected.
2. With insufficient daylight, the sensor turns light ON when motion is detected.
3. After there's no motion detected, the sensor keeps light ON 100 % for holdtime.
4. After holdtime, sensor dims light to standby dimming level for standby period. If the standby period has been set as 0s, sensor turns light OFF automatically after holdtime.
5. The sensor turns OFF light automatically after the standby period when there's no motion detected.

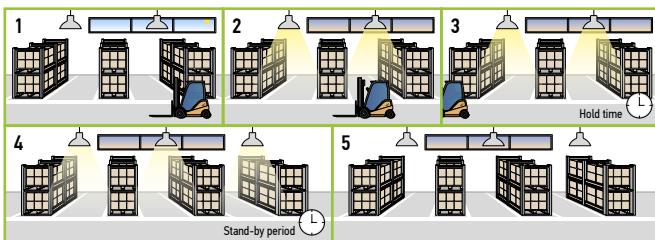

DAYLIGHT HARVESTING:

1. When the ambient brightness is lower than the preset lux level, the sensor will automatically turn on the light and adjust the dimming according to changes in ambient brightness. As it gets darker outside, the fixtures will brighten, and as it gets brighter outside, the fixtures will dim.
2. When the ambient brightness exceeds the preset lux level, the light will turn OFF.



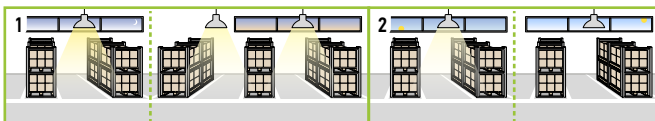


MICROWAVE MOTION SENSOR:


To avoid blocking the microwave emission, the microwave sensor can not be covered with metal materials, be sprayed with a coating of metal components, or have attached metal material or stickers etc.

The distance between the antenna and the glass (dielectric material) should be no less than 0.4 ft when the sensor is within the glass lampshade. Otherwise, the microwave motion sensor will not penetrate the glass easily.


Avoid placing the sensor inside a metal chamber, this may cause a mis-trigger.




The sensor should not be placed in a small confined space. To avoid increasing the sensor detection range or abnormal operation, the sensor should be kept away from large areas of metal and glass reflectors (separation distance at least 3.3 ft). Reduce the detection area setting.




To avoid affecting the microwave signal transmission, the microwave antenna should be higher than the surrounding metal surface.



Any vibration or movement may trigger the sensor. Ensure the sensor is far from any constant movement.




At least 2 m/6.5 ft distance between microwave sensors;
1.5 m/4.9 ft between the sensor and other wireless devices such as routers to avoid possible radio interference.



DAYLIGHT HARVESTING SETTING:

1. Adjust "daylight" value higher than 50lux.
2. Preset "standby period" 0S.
3. Press "daylight harvesting" button on remote control to activate.





LED BACK-LIT PANEL

BLP series

BUILT-IN BATTERY BACK-UP INFORMATION

Model	Battery watts	Lumens in emergency mode	Battery capacity	Emergency mode	Charging time
ASD-BLP-22A30-8EM-2P	8W	1,250 lm	2,500 mAh	90 min	≥ 24 hours
ASD-BLP-24A40-8EM-2P	8W	1,250 lm	2,500 mAh	90 min	≥ 24 hours
ASD-BLP-22A30-QB-8EM-2P	8W	1,265 lm	2,500 mAh	90 min	≥ 24 hours
ASD-BLP-24A40-QB-8EM-2P	8W	1,286 lm	2,500 mAh	90 min	≥ 24 hours

ANNEX 1

Model	Watts	3,000K	3,500K	4,000K	5,000K	6,500K
ASD-BLP-14A40-4P	25W	-	3,385 lm	3,562 lm	3,478 lm	-
	30W	-	3,944 lm	4,169 lm	4,036 lm	-
	40W	-	4,977 lm	5,293 lm	5,137 lm	-
ASD-BLP-22A30-4P ASD-BLP-22A30-MS-2P ASD-BLP-22A30-QB-8EM-2P	20W	-	2,543 lm	2,681 lm	2,629 lm	-
	25W	-	3,068 lm	3,273 lm	3,177 lm	-
	30W	-	3,528 lm	3,761 lm	3,633 lm	-
ASD-BLP-22A30-8EM-2P	20W	-	2,502 lm	2,645 lm	2,587 lm	-
	25W	-	3,012 lm	3,213 lm	3,111 lm	-
	30W	-	3,462 lm	3,699 lm	3,573 lm	-
ASD-BLP-24A40-4P ASD-BLP-24A40-MS ASD-BLP-24A40-QB-8EM-2P	25W	-	3,288 lm	3,399 lm	3,331 lm	-
	30W	-	3,839 lm	3,983 lm	3,891 lm	-
	40W	-	4,988 lm	5,200 lm	5,025 lm	-
ASD-BLP-24A40-8EM-2P	25W	-	3,288 lm	3,398 lm	3,331 lm	-
	30W	-	3,839 lm	3,891 lm	3,983 lm	-
	40W	-	4,988 lm	5,200 lm	5,025 lm	-
ASD-BLP-24A50-4P	30W	-	4,139 lm	4,280 lm	4,205 lm	-
	40W	-	5,178 lm	5,347 lm	5,304 lm	-
	50W	-	6,250 lm	6,542 lm	6,341 lm	-
ASD-BLP-24A67-4P	38W	6,538 lm	6,611 lm	6,613 lm	6,552 lm	6,430 lm
	45W	7,420 lm	7,516 lm	7,538 lm	7,450 lm	7,271 lm
	51W	8,256 lm	8,394 lm	8,347 lm	8,380 lm	8,209 lm
	67W	10,571 lm	10,786 lm	10,836 lm	10,731 lm	10,407 lm

INSTALLATION GUIDE

IMPORTANT SAFETY INFORMATION:

Please read all the instructions below before installation!

- ▶ Make sure that the supply voltage corresponds to the rated product voltage.
- ▶ The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- ▶ If the product is damaged, do not use it.

⚠ WARNING

Risk of personal injury – read and follow all warnings and installation instructions. Keep or give to the owner for future reference.

Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.


Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

ASD® assumes no responsibility for claims arising out of improper or careless installation or handling of this product.

RECESSED MOUNT INSTALLATION:

1. Lift all mounting clips along the edges of the panel. Turn the mounting clip head.
2. Remove the knockout hole on the driver box with a screwdriver, remove screw and take out the driver cover. Connect the wires inside the driver box: Black to Black, White to White, Green to Green.
3. Cover the driver box and tighten it with a screwdriver, finish connection.

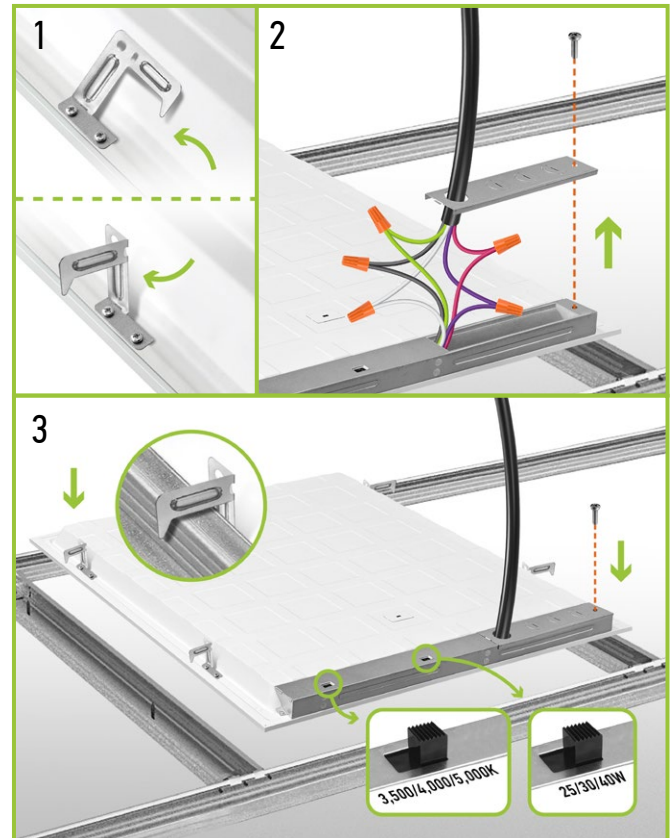

For most up-to-date spec sheets please refer to asd-lighting.com



LED BACK-LIT PANEL


BLP series

SURFACE MOUNT INSTALLATION:

ASD-FELP14-L ASD-FELP22-L ASD-FELP24-L

sold separately


1. Connect 3 pieces of the frame to the ceiling using four screws.
 2. Connect the panel wires as shown in electrical schematic diagram and insert panel into frame.
 3. Attach the fourth piece and secure with screws. Power on to ensure installation is complete.
- * Must remove earthquake hook before installing surface mount frame.

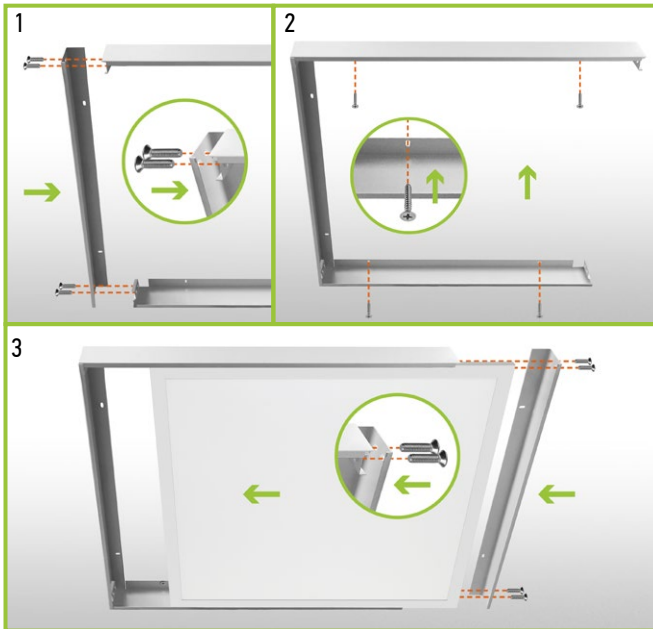

MOTION SENSOR INSTALLATION:

ASD-M2MW-WH **sold separately**

1. Locate the designated knockout area for the motion sensor. Carefully remove the knockout plate along the cut line.
2. Securely install the motion sensor in the prepared opening.
3. Connect the sensor to the driver following the Electrical Schematic Diagram.

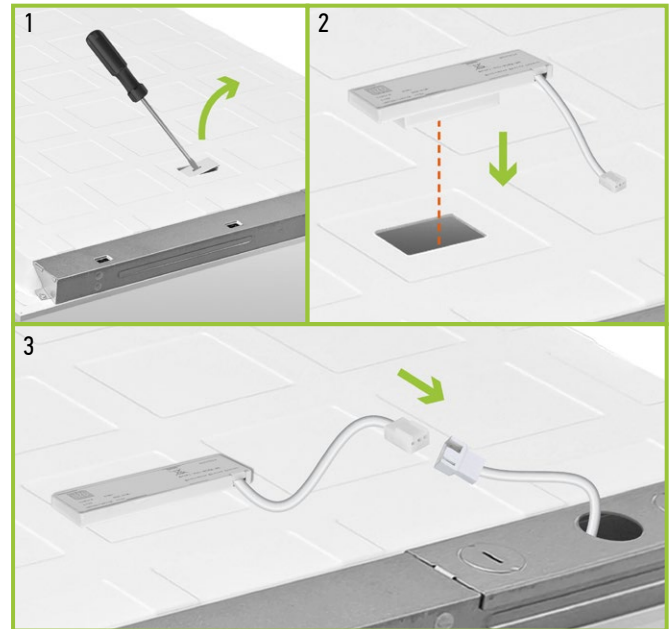

ORDERING INFORMATION

Model	Product dimensions	Weight	Pcs. per carton	Carton size	Carton weight	UPC	GTIN 14 in carton
BLP							
ASD-BLP-14A40-4P	47-3/4" x 11-7/8" x 1-3/8"	18 lbs (8.2 kg)	1	49.13" x 7.72" x 15.63"	24.3 lbs	81019020025	-
ASD-BLP-22A30-4P	23-3/4" x 23-3/4" x 1-3/8"	15.4 lbs (7 kg)	1	25.24" x 27.56" x 7.80"	20.1 lbs	81012811447	-
ASD-BLP-24A40-4P	47-3/4" x 23-3/4" x 1-3/8"	31.3 lbs (14.2 kg)	1	49.25" x 27.56" x 7.80"	37.7 lbs	81012811448	-
ASD-BLP-24A50-4P	47-3/4" x 23-3/4" x 1-3/8"	32.6 lbs (14.8 kg)	1	49.25" x 27.56" x 7.80"	36.7 lbs	81012811704	-
ASD-BLP-24A67-4P	47-3/4" x 23-3/4" x 1-3/8"	31 lbs (14.1 kg)	1	49.25" x 27.56" x 7.80"	38 lbs	81019020009	-
BLP-MS WITH MOTION SENSOR							
ASD-BLP-22A30-MS-2P	23-3/4" x 23-3/4" x 1-3/8"	7.7 lbs (3.5 kg)	2	28.3" x 25.4" x 8.6"	20.1 lbs	81012811949	10810128119495
ASD-BLP-24A40-MS	47-3/4" x 23-3/4" x 1-3/8"	8.2 lbs (3.7 kg)	4	28.3" x 49.5" x 8.6"	39.2 lbs	81012811581	10810128115817
BLP-EM WITH BATTERY BACK-UP							
ASD-BLP-22A30-8EM-2P	23-3/4" x 23-3/4" x 1-3/8"	5.5 lbs (2.5 kg)	2	25.43" x 8.62" x 28.31"	13.1 lbs	81019020238	10810190202385
ASD-BLP-24A40-8EM-2P	47-3/4" x 23-3/4" x 1-3/8"	9.1 lbs (4.1 kg)	2	49.49" x 8.62" x 28.31"	21.8 lbs	81019020239	10810190202392
BLP-QB-EM WITH Q-BASE AND BATTERY BACK-UP							
ASD-BLP-22A30-QB-8EM-2P	23-3/4" x 23-3/4" x 1-3/8"	5.5 lbs (2.5 kg)	2	28.31" x 25.43" x 8.62"	13.1 lbs	81012811918	20810128119188
ASD-BLP-24A40-QB-8EM-2P	47-3/4" x 23-3/4" x 1-3/8"	9.1 lbs (4.1 kg)	2	28.31" x 49.49" x 8.62"	21.8 lbs	81012811919	20810128119195

ACCESSORIES:

Model	Product dimensions	Pcs. in middle box	Middle box size	Middle box weight	Pcs. per carton	Carton size	Carton weight	UPC	GTIN 14 in middle box	GTIN 14 in carton
ASD-M2MW-WH	2-9/16" x 13/16" x 5/8"	10	10.4" x 3.2" x 1.7"	0.4 lbs	120	11.2" x 7.5" x 10.2"	11.4 lbs	81012811922	10810128119228	20810128119225
ASD-FELP14-L	48" x 12-1/8" x 1-15/16"	-	-	-	9	48.8" x 5.9" x 7.7"	23.4 lbs	819201021574	-	10819201021571
ASD-FELP22-L	24" x 23-15/16" x 1-15/16"	-	-	-	9	25.2" x 6.5" x 7.7"	28.8 lbs	81920102158	-	10819201021588
ASD-FELP24-L	48" x 23-15/16" x 1-15/16"	-	-	-	9	48.8" x 5.9" x 7.7"	45.2 lbs	81920102159	-	10819201021595

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com

