Driver+ Dimmer 2 in 1 constant voltage EDD-CCT series PWM output

EDD96-24DC-CCT

Whole Family: EDD-xx096-CCT 24V / 48V - 96W

c UL us LISTED E495946 FC Class P SELV RoHS Reach

The driver is inside

Features

Output:	Constant Voltage
Input Range:	120VAC
PFC design:	Built-in active PFC function
Protections:	Short circuit/ Over load/ Over temperature
Heat dissipation:	Cooling by free air convection
Waterproof performance:	For dry and damp locations (US)
Design features:	1) Fine-tune output voltage can be adjusted slightly 2) Preset dimmer with on/off switch 3) 3-Way switches 4) Dimming and color temperature adjustment function. 5) Eliminated compatibility issues between drivers and switches
Dimming range:	0.3%-100%
Application:	Suitable for the application of LED lighting
Warranty:	5 years warranty
Others:	20KHZ PWM output with dimming curve is a gamma 2.2 curve Flicker-free

Tech support : Arik Nirenberg | Phone : 818-904-3309 | Fax : 818 904 3327 | info@emcod.com | techsupport@emcod.com

Specification

Model		EDD96-24DC-CCT	EDD96-48DC-CCT
Certificate		UL / cUL / FCC / Class P / SELV / RoHS / Reach	
Output	DC Rate Voltage	24V (24V-26V adjust by knob)	48V (48V-50V adjust by knob)
	Voltage Tolerance	±0.5V	
	Load Regulation	≤1%	≤1%
	Line Regulation	≤0.5%	
	Rated current	4A	2A
	Rated power	96W	96W
Input	Voltage Range	120VAC	
	Frequency Range	60Hz	
	Power Factor @ full load	≥0.99	
	THD(Typ.) @ full load	≤10%	
	Efficiency @ full load	91.0%	92.0%
	AC Current (Max.)	0.9A	0.9A
	Inrush Current (Typ.)	50A, 150us@50% Ipeak	
	Leakage current	<0.5mA	
Protection	Short Circuit	Hiccup mode, recovers automatically after fault condition is removed	
	Over Load	≥110% Hiccup mode, recovers automatically after fault condition is removed	
	Over temperature	Shell surface temperature 100℃±10℃ shut down o/p voltage, automatically recover after cooling	
Environment	Working TEMP.	-40~+60℃ (see below derating curve)	
	Working Humidity	20 - 95%RH non-condensing	
	Storage TEM.,Humidity	-40 - +80℃,10 - 95% RH non-condensing	
	TEMP.coefficient	±0.03%/℃(0 - 50℃)	
	Vibration	10~500Hz, 2G 12min./1 cycle, period for 72 min. each along X,Y,Z axes	
Safety & EMC	Safety standards	UL8750 CAN/CSA-C22.2 No.250.13 (US)	
	Withstand voltage	I/P-O/P:1.8KVAC I/P-F/G:1.8KVAC O/P-F/G:0.5KVAC (US)	
	Isolation resistance	I/P-O/P:100MΩ / 500VDC / 25℃ / 70% RH	
	EMC Immunity	FCC/ICES do not request this test (US)	
	EMC Emission	FCC Part15 Subpart B ANSI C63.4:2014 (US)	
Others	Net Weight	0.25KG	
	Dimension	105*54*51mm / 4.134"x2.126"x1.996" (Inch)	
	Packing		
Notes	1. All parameters NOT specially mentioned are measured at 120VAC input, rated load and 25℃of ambient temperature. 2. Tolerance: includes set up tolerance and load regulation .		

Tech support : Arik Nirenberg | Phone : 818-904-3309 | Fax : 818 904 3327 | info@emcod.com | techsupport@emcod.com

Efficiency Curve (efficiency vs output load)

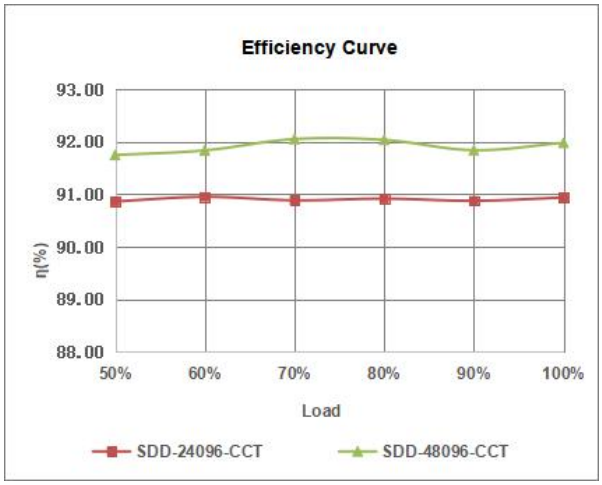

Power factor curve

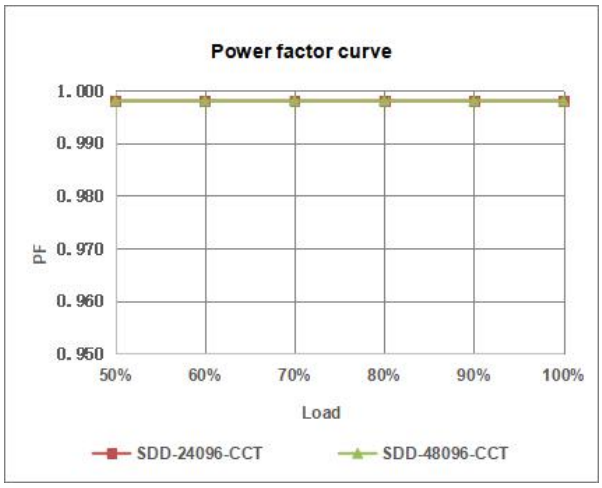

Derating Curve (Output power VS Ambient TEMP)

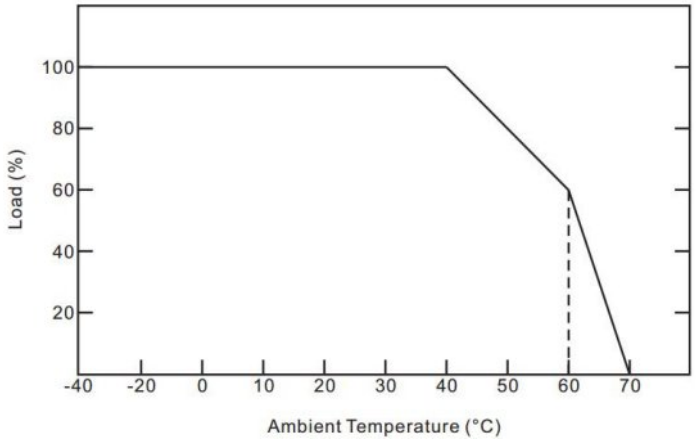

1. To extend their life, please refer to the Derating Curve and derate according to the temperature.
2. The output current of the LED driver should be selected according to the rated current of the lamp and the ambient temperature. Normally, we recommend the power supply to reserve a certain amount of load to extend LED driver's life .

Mechanical Specification

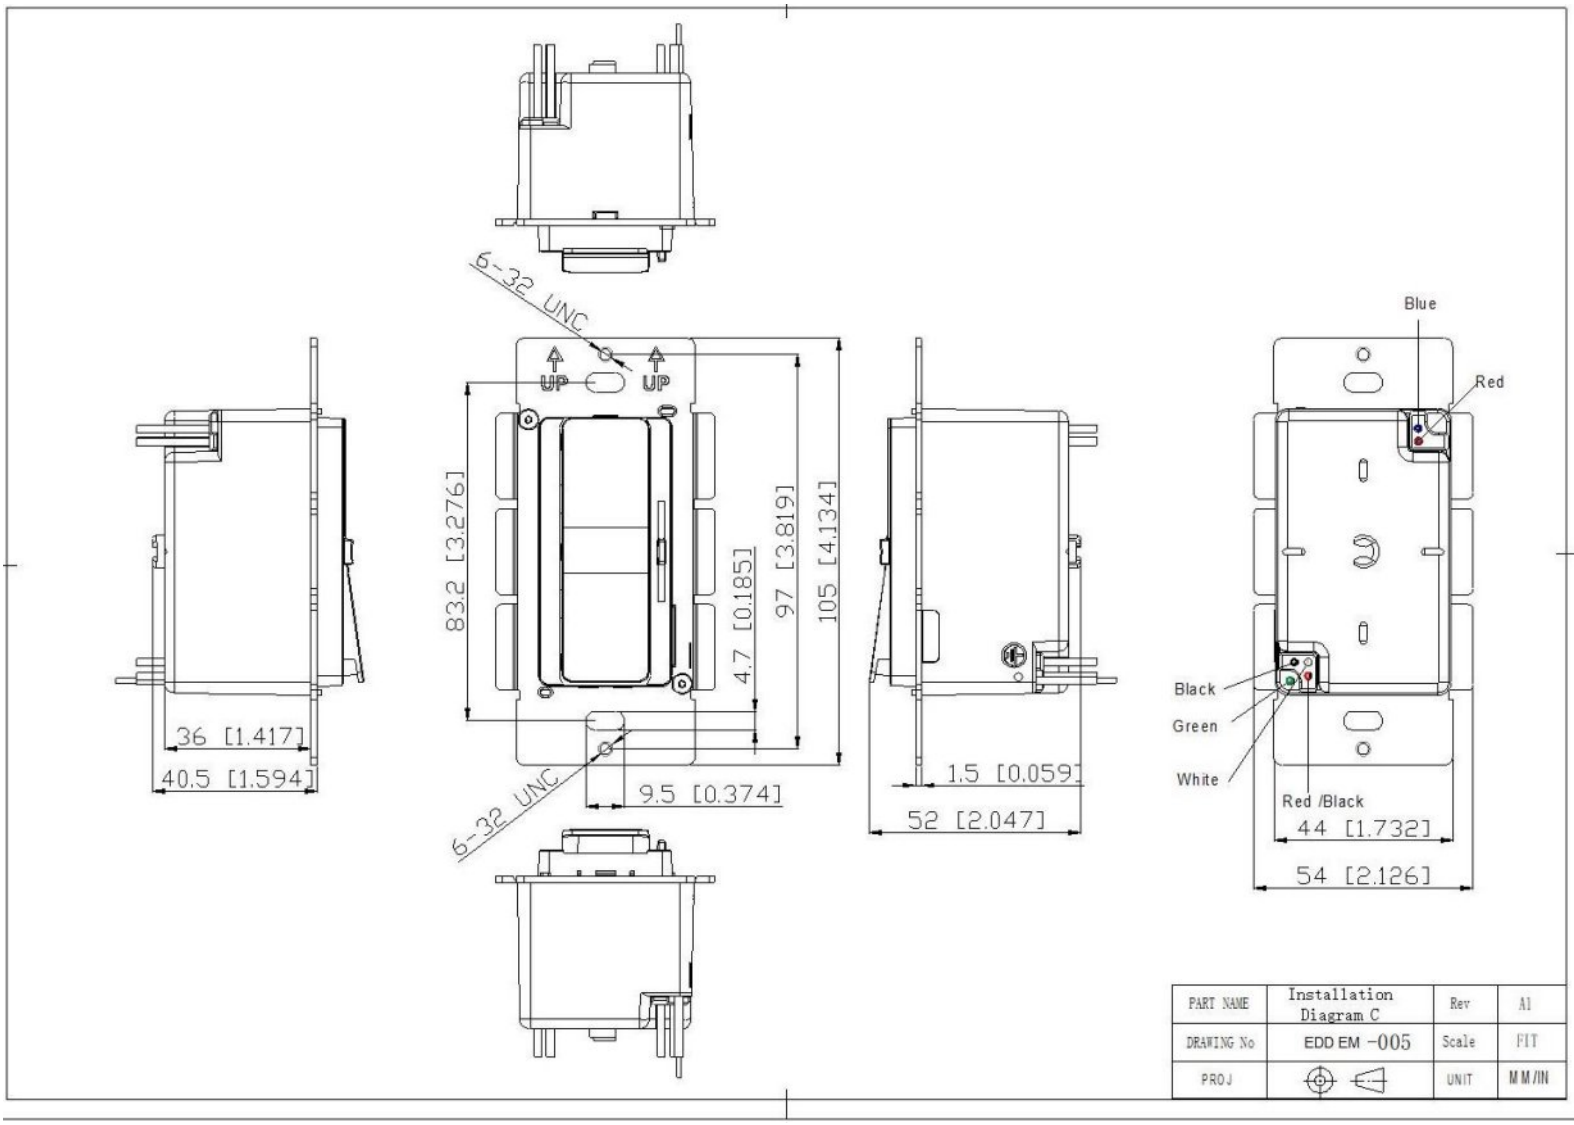

American Wire Gauge	
	SD01
Input wires	Black cable (L), Red black cable (L1) , White cable (N) and Green cable (FG) (4*18AWG)
Output wires	Red cable (V+) ,White/Gray cable(CW-),Yellow cable(WW-) (3*18AWG)

Warm tips :

1. Any other requests, we can customize.
2. Please ensure that the connection is correct.

Tech support : Arik Nirenberg | Phone : 818-904-3309 | Fax : 818 904 3327 | info@emcod.com | techsupport@emcod.com

Dimming Operation and Connecting Diagram

①Wiring diagram of EDD-CCT model for standard dimming system

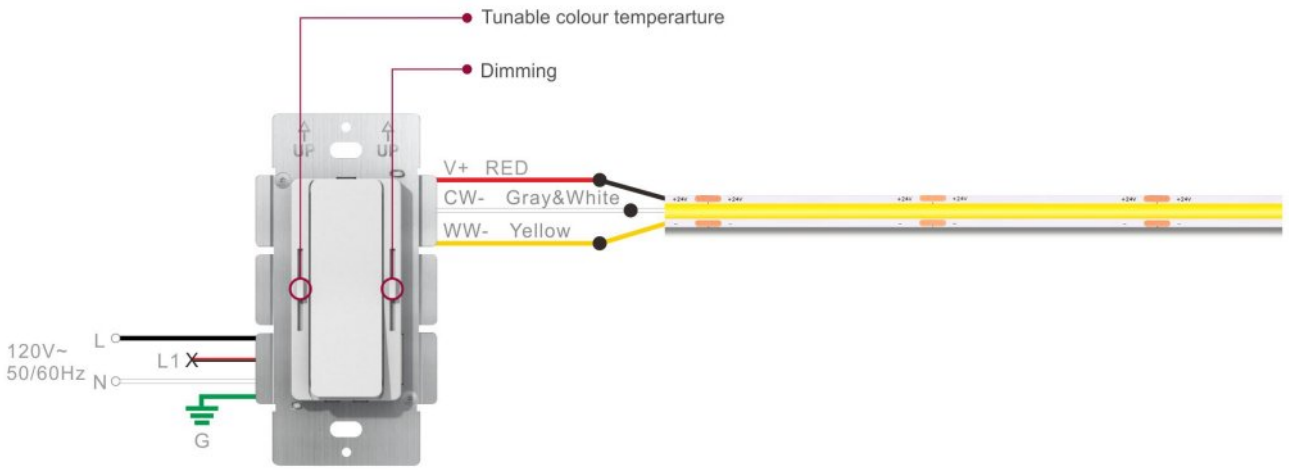

② Wiring diagram of EDD-CCT model for 3-way dimming system

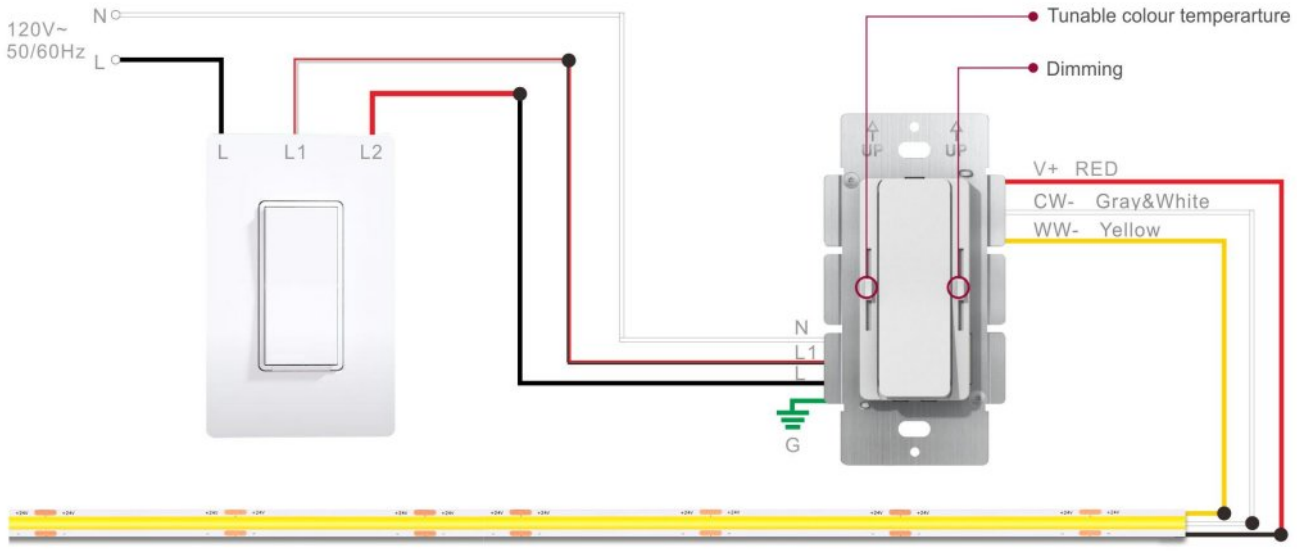

Note: Dimmer's panel is not replaceable.

Knob to adjust the voltage

Clockwise rotation of the high voltage

Have any questions, please contact with EMCOD

Please visit our website or contact us for more information! www.emcod.com

Instructions

1. This driver+dimmer 2 in 1 should be installed by qualified and professional person.
2. Please make sure the driver+dimmer 2 in 1 is installed with adequate ventilation around it to allow for heat dissipation.
3. Ensure that connection is correct to avoid LED light or driver+dimmer 2 in 1 be damaged.
4. If the driver+dimmer 2 in 1 cannot work normally, don't maintain privately.

Tech support : Arik Nirenberg | Phone : 818-904-3309 | Fax : 818 904 3327 | info@emcod.com | techsupport@emcod.com