



RECESSED LIGHTING • LUMINAIRE ENCASTRE


SQUARE LED SlimLED™ PRO

SlimLED^{MC} PRO À DEL CARRÉ

SLIMLEDTM PRO

SLMPRO4S / SLMPRO6S Series

Fig. 1

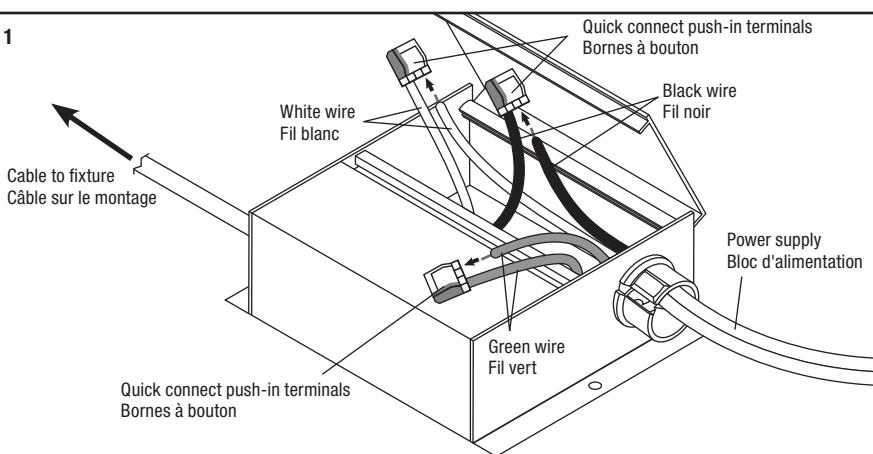

IMPORTANT: Read all instructions before installing fixtures. Retain for future reference.

SAFETY: For your safety, this fixture must be wired in accordance to local electrical codes and ordinances. All work should be done by a qualified electrician.

WARNING: Make certain power is OFF from the electrical panel before starting installation or attempting any maintenance. Indoor installation only.

TOOLS REQUIRED:

- Saw
- Measuring Tape
- Electrical Wiring (use type and gauge suitable for application to connect the fixtures)

ASSEMBLY INSTRUCTIONS:

1. Turn power OFF from the electrical panel before starting installation.
2. Locate a suitable position to place the SlimLED™ PRO fixture and open a hole in accordance to the cut-hole dimensions (refer to *Hole Cut Table* for appropriate size).
3. Run the electrical wire from the switch (power supply) through the mounting hole – use NMD90 Romex or BX cable.
4. Open the hardwire box swing cover and remove the appropriate knockout(s).
5. Insert the electrical supply cable through the knockout and secure with a cable connector (sold separately).
6. Wire box using supplied quick connect push-in terminals. Connect green ground wire of cable to green wire on box. Connect white wire of cable to white wire of box. Connect black wire of cable to black wire of box. (Fig.1)
7. Place all wiring and connections back in to the box and close the cover
8. **New construction applications:** Hardwire box shall be firmly secured to studs, joists, or similar fixed structural units. (Fig. 2)
9. **Remodel applications:** Do not require the hardwire box to be firmly secured after the mounting plates, studs, joists, or structural units have been concealed. Snap off the hardwire box tabs (Fig. 3), then insert into ceiling (Fig. 4).
10. Push spring loaded clips on the fixture upwards and insert fixture base in to the mounting hole. Release the clips and fixture will be pulled flush to the ceiling. (Fig.5)
11. Once assembly is complete, turn on power to confirm fixture is working properly.

For more information on our lifetime warranty, please visit www.Liteline.com/goldlabel
Pour plus d'informations sur notre garantie à vie, s'il vous plaît visitez www.Liteline.com/goldlabel



Fig. 2

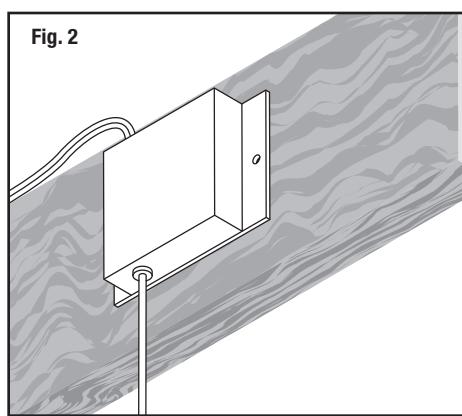


Fig. 3

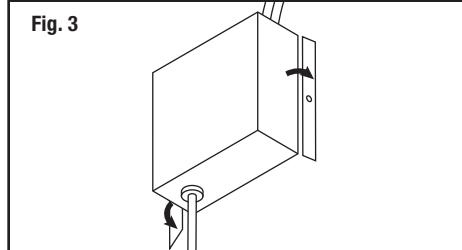


Fig. 4


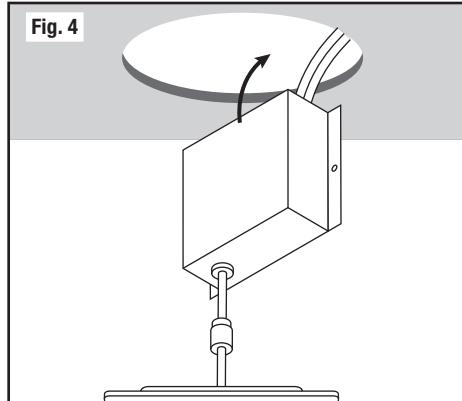


Fig. 5



Hole Cut Size / Taille Trou Découpé

SLMPRO4S	4-3/16" x 4-3/16" (106mm x 106mm)
SLMPRO6S	6-3/16" x 6-3/16" (157mm x 157mm)

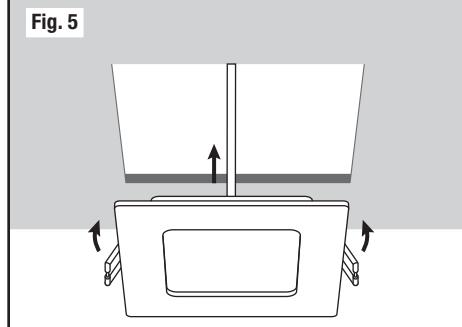

Liteline Corporation

Info@liteline.com
www.liteline.com



416-996-1856
1-866-730-7704

905-794-1990
1-888-738-9736

REV1/6.16.16

© Copyright 2016, Liteline Corporation