

DMX SLIDER CONTROL

RGBW 30CH Slider Controller

Simple and straight forward DMX control for a variety of applications. The DMX-RGBW-30CH has five different customizable program groups and six parameter sliders, giving users a total of 30 channels of DMX control. Easy to program and easy to use, the DMX-RGBW-30CH gives users the ability to paint incredible colorsapes with the slide of a few faders and allows them to program those scenes for later recall.

- Six programmable, non-motorized faders
- Five program buttons for easy program storage and recall
- Chase button for easy chasing pre-sets
- Compact footprint, 8"x4"x2" in size
- Integrated emergency backup battery

PROJECT: _____

TYPE: _____

LOCATION: _____


CATALOG NUMBER: _____



DMX SLIDER CONTROL QUICK SPECS

| | |
|--------------------------|-------------------------------|
| INPUT VOLTAGE | 9-12V DC |
| POWER CONSUMPTION | 10W |
| OUTPUT | DMX512 signal |
| OPERATING TEMP | -20°C to 55°C (-4°F to 131°F) |
| RATING | Dry locations |

DMX SLIDER CONTROL QUICK DIMENSIONS

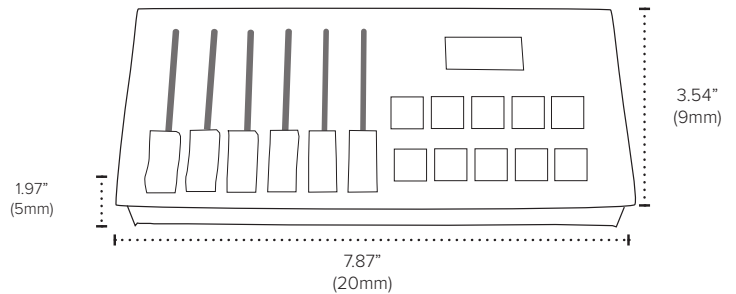

DMX SLIDER CONTROL ORDERING INFORMATION

| ITEM NUMBER | DESCRIPTION | VOLTAGE | OUTPUT | RATING |
|----------------------|-----------------------------------|----------|---------|---------------|
| DMX-RGBW-30CH | 30 Channel RGBW Slider Controller | 9-12V DC | DMX 512 | Dry locations |

Includes: 120VAC Power Adapter

RECOMMENDED DECODERS

| PART NUMBER | DESCRIPTION | APPLICATION | INPUT | CURRENT | OUTPUT |
|---------------------------|------------------------------|--------------|-----------|------------|--------------|
| REC-DMX-5A-4Z | DMX 4-Channel Decoder | Dry location | 12-24V DC | 4x5A | 4x(60-180W) |
| REC-DMX-RJ45-5CH | DMX 5-Channel Decoder | Dry location | 12-24V DC | 5x8A | 5x(96-192W) |
| REC-DMX-RJ45-3X4CH | DMX 3 Port 4-Channel Decoder | Dry location | 12-24V DC | 12(3x4)x5A | 12x(60-120W) |
| DEC-DMX-IP67 | DMX 4 Channel IP67 Decoder | Wet location | 12-24V DC | 4x5A | 4x(60-180W) |

Control can be powered from secondary side of 12-24V DC driver being used to power the decoder.

RECOMMENDED TRANSCEIVER

| PART NUMBER | DESCRIPTION | APPLICATION | INPUT | LISTING |
|-------------------------|--------------------------|--------------|----------|-------------------------------|
| CTRL-WDMX-TRNRCV | Wireless DMX Transceiver | Dry location | 5-24V DC | FCC Compliant; RoHS Compliant |

DMX SLIDER CONTROL WIRED QUICK SET-UP



DMX Slider Control
30-channel RGBW controller



American Lighting RGBW Luminaire

DMX SLIDER CONTROL WIRELESS QUICK SET-UP



DMX Slider Control
30-channel RGBW controller



Wireless DMX Transceiver
CTRL-WDMX-TRNRGV-X



Wireless DMX Transceiver
CTRL-WDMX-TRNRGV



Power Supply/Driver



DMX Decoder
(Required per zone)



Tape Light



AMERICAN LIGHTING WARRANTY

LIMITED WARRANTY FOR LED PRODUCTS: 2 YEARS

LIMITED PRODUCT WARRANTY

Our products are warranted to be free from defects in material and workmanship for the warranty period listed. Warranty periods begin from the date of shipment from American Lighting Inc's warehouse to the original purchaser. Products that prove to be defective during their specific warranty period will be either repaired or replaced, at the sole discretion of American Lighting Inc. Claims for defective products must be submitted in writing to American Lighting Inc's RGA Department within the warranty period. Upon approval of such return, American Lighting Inc reserves the right to inspect the product for misuse or abuse. Claims for indirect or consequential damages or for product that, in American Lighting Inc's opinion, has been misused will be denied. This is a warranty of product reliability only and not a warranty of merchantability or fitness for a particular purpose. American Lighting Inc shall have no liability whatsoever in any event for payment of incidental or consequential damages, including, without limitations, installation costs and/or damages for personal injury and/or property. These products may represent a possible shock or fire hazard if improperly installed or altered in any way. This warranty does not apply to any product that has not been properly installed in accordance with current local codes and/or the National Electrical Code. Products that require a transformer, driver, or power supply must be used in conjunction with American Lighting Inc's recommended power supply to ensure safety and retain product warranty.

PRODUCT SPECIFICATIONS

For the latest product information, updates, instructions and details concerning specifications, colors, finishes, performance, installation and design, visit www.americanlighting.com. Color may vary from the color printed herein due to limitations in photographic and printing processes. American Lighting Inc. reserves the right to change product specifications without notice. Other product specifications such as color temperature, wavelength characteristics and lumen output are subject to production limitations and may vary. LED technology is changing rapidly, and not all color temperatures and performance levels can be duplicated at a later time. Best practices include purchasing 10-15% more for a particular project on the same initial order where white LED color temperatures must be maintained over project and product life. Eventual product replacement should be considered at layout and design stages. Best practices also include testing connections and product performance prior to mounting and/or installing.

AVERAGE LIFE

Average incandescent lamp life, rated life and average life are terms used to describe the number of hours at which half of the lamps have failed. For LEDs, the hours of rated life specify the point where 70% of original lumen output is reached. Below this point, the effective life is over, however, the LED may still emit light. Individual results may vary with actual environmental conditions including, but not limited to, proper installation, ambient temperature and/or input voltage fluctuations.