
Decorative Lighting Position Guide

Decorative and Post Top Light fixtures for EVERY mounting height and application

- Exceptional styling, energy efficiency and state of the art controls
- Precision optical distributions without sacrificing visual comfort
- Mounting versatility and wide range of sizes and lumen packages

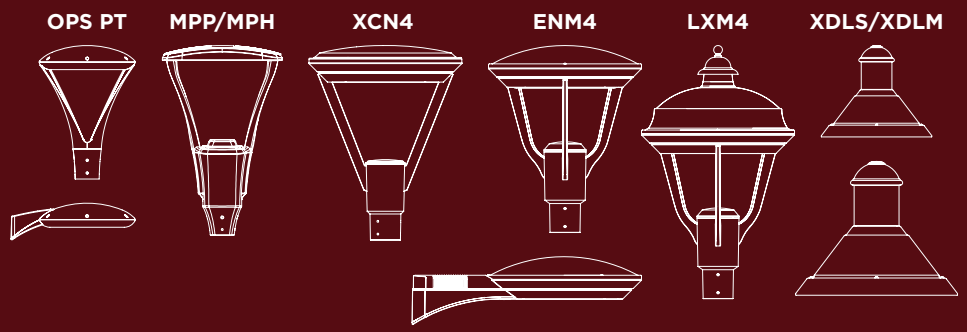

MPP/MPH
(10,000 - 72,000)

OPS PT
(3,000 - 17,000)

XCN4
(5,000 - 25,000)

ENM4
(5,000 - 25,000)

XDLS/XDLM
(3,000 - 25,000)

LXM4
(5,000 - 25,000)

HIGH MOUNTING HEIGHT

PEDESTRIAN

CONTEMPORARY

TRADITIONAL

Lumen Package (lm) Listed Below.

Decorative Lighting Position Guide



	Opulence (OPS PT)	Mirada (MPP/MPH)	Constitution (XCN4)	Enterprise (ENM4)	Lexington (LXM4)	LifeStyle Small (XDLS)	LifeStyle Medium (XDLM)
	★★★★	★★★★★	★★★★	★★★★	★★★★	★★★★	★★★★
Markets	Grocery & Pharmacy, Parking Lot/ Garage, Petroleum, QSR, Retail	Automotive, Grocery & Pharmacy, Parking Lot/Garage, Petroleum, QSR, Retail, Warehouse	Grocery & Pharmacy, Parking Lot/ Garage, Petroleum, QSR, Retail	Grocery & Pharmacy, Parking Lot/ Garage, Petroleum, QSR, Retail	Grocery & Pharmacy, Parking Lot/ Garage, Petroleum, QSR, Retail	Grocery & Pharmacy, Parking Lot/ Garage, Petroleum, QSR, Retail	Grocery & Pharmacy, Parking Lot/ Garage, Petroleum, QSR, Retail
Size L x W x H (in)	16 x 16 x 22	20 x 20 x 33	25 x 25 x 32	25 x 25 x 31	25 x 25 x 42	18 x 18 x 15	28 x 28 x 22
Weight (lbs)	25	55 / 60	45	64	64	25	36
Mounting Height (ft)	10-20	15 - 40	15 - 25	15 - 25	15 - 25	10-20	15 - 25
Mounting	2-3/8" - 3" OD Tenon, Twin Post, Wall Bracket	2-3/8" - 3" OD Tenon, Twin Post, Wall Bracket	4" OD Pole/Tenon, Twin Post, Wall Bracket	B3 Side Arm, 4" OD Pole/Tenon, Twin Post, Wall Bracket	4" OD Pole/Tenon, Twin Post, Wall Bracket	B3 Side Arm, 4" OD Pole/Tenon, Wall Bracket (Side Arm Only)	B3 Side Arm, 4" OD Pole/Tenon, Wall Bracket (Side Arm Only)
Voltage (V)	120-277, 347-480	120-277, 347-480	120-277, 347-480	120-277, 347-480	120-277, 347-480	120-277, 347-480	120-277, 347-480
Operating Temperature C (F)	-40 to 40 (-40 to 104)	-40 to 40 (-40 to 104)	-40 to 40 (-40 to 104)	-40 to 40 (-40 to 104)	-40 to 40 (-40 to 104)	-40 to 40 (-40 to 104)	-40 to 40 (-40 to 104)
Lumen Package (lm)	3,000 - 17,000*	10,000 - 72,000*	5,000 - 25,000*	5,000 - 25,000*	5,000 - 25,000*	3,000 - 17,000*	5,000 - 25,000*
Lumens Per Watt (LPW)	114 - 148	112 - 156	132 - 161	100 - 139	100 - 140	109 - 164	120 - 159
Wattage (W)	20 - 105	67 - 566	74 - 231	39 - 228	39 - 228	20 - 105	39 - 196
Lens/Optics	Acrylic (Polycarbonate Option)	One Piece Silicone	One Piece Silicone	One Piece Silicone	One Piece Silicone	Acrylic (Polycarbonate Option)	One Piece Silicone
Distributions	Type 2, 3W, 4F, 5C, 5Q, 5R, 5D, AD	Type 2, 3, FT, 5W, FTA, AM, CT	Type 2, 3, FT, 5W	Type 2, 3, FT, 5W	Type 2, 3, FT, 5W	Type 2, 3W, 4F, 5C, 5Q, 5R, 5D, AD	Type 2, 3, FT, 5W
Sheilding	External Shields	Integral Full & Half Louver	Integral Full Louver	Integral Full Louver	Integral Full Louver	External Shields	Integral Full Louver
Rotatable Optics	Consult Factory	Yes	Yes	Yes	Yes	Consult Factory	Yes
Shielding	80 CRI	70 CRI	70 CRI	70 CRI	70 CRI	80 CRI	70 CRI
CCT	2700K, 3000K, 3500K, 4000K, 5000K	2700K, 3000K, 4000K, 5000K	3000K, 4000K, 5000K	3000K, 4000K, 5000K	3000K, 4000K, 5000K	2700K, 3000K, 3500K, 4000K, 5000K	3000K, 4000K, 5000K
CRI	Narrow Band, Phosphor Converted	Consult Factory	Consult Factory	Consult Factory	Consult Factory	Narrow Band, Phosphor Converted	Consult Factory
Photocell	Twistlock	Twistlock	Twistlock	Twistlock	Consult Factory	Not Available	Not Available
Sensors & Wireless Controls	IMSBT, AirLink Blue	AirLink Blue, Synapse (Controller Only)	IMSBT, AirLink Blue	IMSBT, AirLink Blue	IMSBT, AirLink Blue	IMSBT, AirLink Blue	IMSBT, AirLink Blue
Twistlock Receptacle	7-Pin	7-Pin	7-Pin	7-Pin	Consult Factory	Not Available	Not Available
Emergency Options	Cold Weather Battery Backup	Not Available	Not Available	Not Available	Not Available	Cold Weather Battery Backup	Not Available
Listings ** ***	IP66, IK09, Dark Sky, 3G, DLC, BAA, BABAA	IP66, IK10, 3G, DLC, BAA, BABAA	IP65, DLC, BAA, BABAA	IP65, BAA, BABAA	IP65, BAA, BABAA	IP66, Dark Sky, DLC, BAA, BABAA	IP65, DLC, BAA, BABAA
Paint Finishes	LSI Standard + Custom Colors	LSI Standard + Custom Colors	LSI Standard + Custom Colors	LSI Standard + Custom Colors	LSI Standard + Custom Colors	LSI Standard + Custom Colors	LSI Standard + Custom Colors

*Custom lumen and wattage packages available, consult factory
**Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.
***Not all versions of this product may be BABAA compliant. Please consult facotry to confirm which versions are qualified.

LSI Industries Inc. 10000 Alliance Rd. Cincinnati, OH 45242 • www.lsicorp.com
(800) 436-7800 • ©LSI Industries Inc. All Rights Reserved. Specifications subject to change without notice.

SELL.1153.D.0226