HomeWorks QS RF seeTouch Tabletop Keypads

HomeWorks QS RF seeTouch Tabletop Keypads provide homeowners with a simple and elegant way to operate lights, shades/draperies, motorized screens, thermostats, and many other devices.

HomeWorks QS RF seeTouch Tabletop Keypads feature large, easy-to-use buttons, plus a unique backlit engraving option that makes the keypads readable any time of the day or night. The keypad buttons are rounded, making them easier to read.


The versatile design of HomeWorks QS RF seeTouch Tabletop Keypads allows them to be mounted on a wall, placed on top of a table, or used as a cordless keypad. The keypads can be powered by a DC adapter or with 2 AAA batteries. Battery powered Tabletop Keypads will shut off after a short period of inactivity in order to conserve battery power.



HQY*-T5RL




HQY*-T5CRL




HQY*-T10RL



HQY*-T10CRL



HQY*-T15RL



HQY*-T15CRL

*"Y" in the model number represents frequency code

Frequency/Channel Codes*

Code	Frequency Range
K	868.0 — 869.8 MHz
Q	433.05 — 434.79 MHz
R	431.0 — 437.0 MHZ

* Contact Lutron for frequency band compatibility for your geographic region. All wireless devices need to be the same frequency band for proper operation.

Model Numbers

HQR-T5RL-XX*, HQR-T5RL-XX*-BA, HQK-T5RL-XX, HQQ-T5RL-XX*	5 button with Master On/Off and Raise/Lower	HQR-T5CRL-XX*, HQR-T5CRL-XX*-BA, HQK-T5CRL-XX*, HQQ-T5CRL-XX*	5 button with Column Raise/Lower
LFK-T5RL-XX*-E	Engraved Faceplate	LFK-T5CRL-XX*-E	Engraved Faceplate
RK-T5RL-XX*-E	Engraved Button Kit	RK-T5CRL-XX*-E	Engraved Button Kit
HQR-T10RL-XX*, HQR-T10RL-XX*-BA, HQK-T10RL-XX*, HQQ-T10RL-XX*	10 button with Master On/Off and Raise/Lower	HQR-T10CRL-XX*, HQR-T10CRL-XX*-BA, HQK-T10CRL-XX*, HQQ-T10CRL-XX*	10 button with Column Raise/Lower
LFK-T10RL-XX*-E	Engraved Faceplate	LFK-T10CRL-XX*-	Engraved Faceplate
RK-T10RL-XX*-E	Engraved Button Kit	RK-T10CRL-XX*-E	Engraved Button Kit
HQR-T15RL-XX*, HQR-T15RL-XX*-BA, HQK-T15RL-XX*, HQQ-T15RL-XX*	15 button with Master On/Off and Raise/Lower	HQR-T15CRL-XX*, HQR-T15CRL-XX*-BA, HQK-T15CRL-XX*, HQQ-T15CRL-XX*	15 button with Column Raise/Lower
LFK-T15RL-XX*-E	Engraved Faceplate	LFK-T15CRL-XX*-	Engraved Faceplate
RK-T15RL-XX*-E	Engraved Button Kit	RK-T15CRL-XX*-E	Engraved Button Kit

* "XX" in the model number represents color/finish code. See **Colors and Finishes** at end of document.

HomeWorks QS RF seeTouch Tabletop Keypads

Specifications

Model Numbers	Keypads: HQR-T5RL-XX*; HQR-T5RL-XX-BA; HQK-T5RL-XX; HQQ-T5RL-XX*; HQR-T10RL-XX*; HQR-T10RL-XX-BA; HQK-T10RL-XX*; HQQ-T10RL-XX*; HQR-T15RL-XX*; HQR-T15RL-XX-BA; HQK-T15RL-XX*; HQQ-T15RL-XX*; HQR-T5CRL-XX*; HQR-T5CRL-XX-BA; HQK-T5CRL-XX*; HQQ-T5CRL-XX*; HQR-T10CRL-XX*; HQR-T10CRL-XX-BA; HQK-T10CRL-XX*; HQQ-T10CRL-XX*; HQR-T15CRL-XX*; HQR-T15CRL-XX-BA; HQK-T15CRL-XX*; HQQ-T15CRL-XX* Faceplate/Button Kits: LFK-T5RL-XX*-E; RK-T5RL-XX*-E; LFK-T10RL-XX*-E; RK-T10RL-XX*-E; LFK-T15RL-XX*-E; RK-T15RL-XX*-E; LFK-T5CRL-XX*-E; RK-T5CRL-XX*-E; LFK-T10CRL-XX*-E; RK-T10CRL-XX*-E; LFK-T15CRL-XX*-E; RK-T15CRL-XX*-E
Power	DC adapter: Input: 100–240 V∼ 50/60 Hz 6.5 W Output: 9 V⎓ 300 mA **Battery powered:** 2 AAA alkaline (included) 1.5 V each
Typical Power Consumption	0.6 W Test conditions: all backlights on medium intensity, nightlight mode enabled, six LEDs on (two presets active per column), keypad powered by a 9 V⎓ adapter (T120-9DC-3).
Regulatory Approvals	**DC adapter:** UL Listed for U.S. and Canada, NOM **Tabletop Keypad:** FCC, IC, COFETEL, ANATEL, CE, TRA, SUPERTEL; SUTEL
Environment	Ambient operating temperature: 32 °F to 104 °F (0 °C to 40 °C), 0% to 90% humidity, non-condensing. Indoor use only.
Communications	HomeWorks QS RF seeTouch Tabletop Keypads communicate with the system through Radio Frequency (RF) and must be located within 30 ft (9 m) of an RF hybrid repeater.
ESD Protection	Tested to withstand electrostatic discharge without damage or memory loss, in accordance with IEC 61000-4-2.
Surge Protection	Tested to withstand surge voltages without damage or loss of operation, in accordance with IEEE C62.41-1991 Recommended Practice on Surge Voltages in Low-Voltage AC Power Circuits.
Power Failure	Power failure memory: should power be interrupted, the keypad will return to its previous state when power is restored.
Mounting	Mounting bracket included for optional wall mount applications.
Warranty	Limited Warranty: www.lutron.com/warranty or call 1.844.LUTRON1 for a printed copy.

* "XX" in the model number represents color/finish code. See **Colors and Finishes** at end of document.

HomeWorks QS RF seeTouch Tabletop Keypads

Design Features


- At the press of a single button, lights fade ON or OFF to desired levels and shades/draperies open or close to desired positions.
- Light levels and shade/drapery positions can be fine-tuned by pressing and holding the raise/lower buttons.
- Programmable to select whole-house or single-room preset levels or positions.
- Green LEDs for status and button/engraving backlighting.
- Adjustable backlight intensity.
- Prepaid engraving included. Redeemable for one engraved button kit.
- Tabletop Keypad Button action is “Wake-up and Activate” – A single button press will “wake up” and activate selected button.

HomeWorks QS RF seeTouch Tabletop Keypads


Dimensions

All dimensions are shown as in (mm)


Keypad Front View

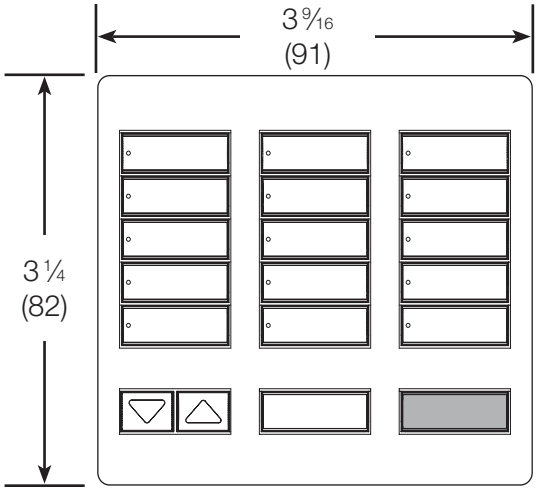


Keypad Side View



Mounting Bracket Front View

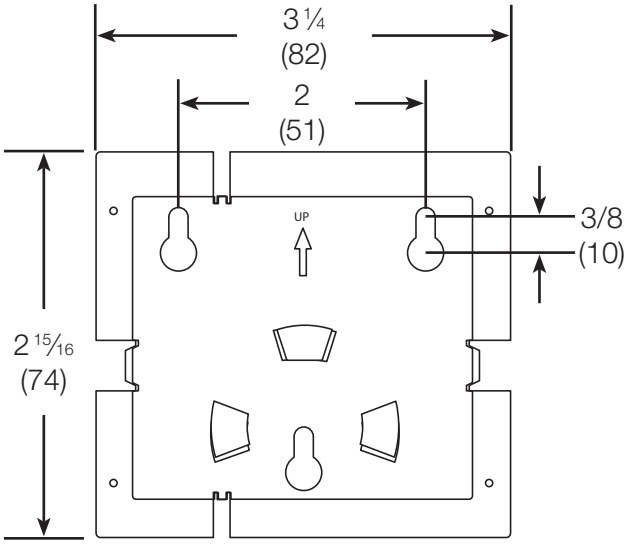


Mounting Bracket Side View

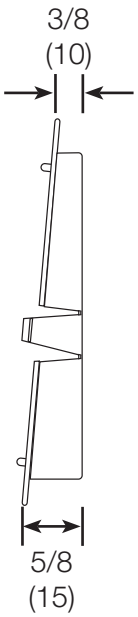


HomeWorks QS RF seeTouch Tabletop Keypads

Wall Mounting (optional)


Attach mounting bracket to wall using the supplied wall anchors and screws.

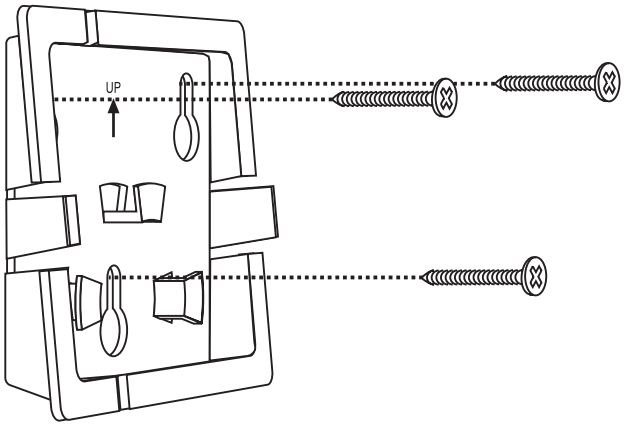

If using the DC adapter, wrap excess cord around the cord holder and snap the keypad onto the mounting bracket.

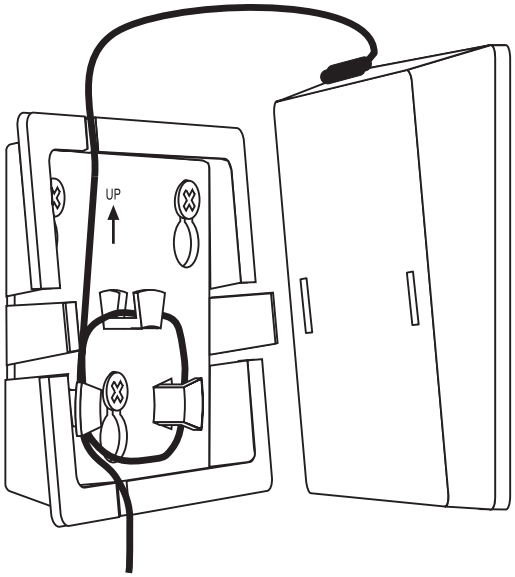

Operation

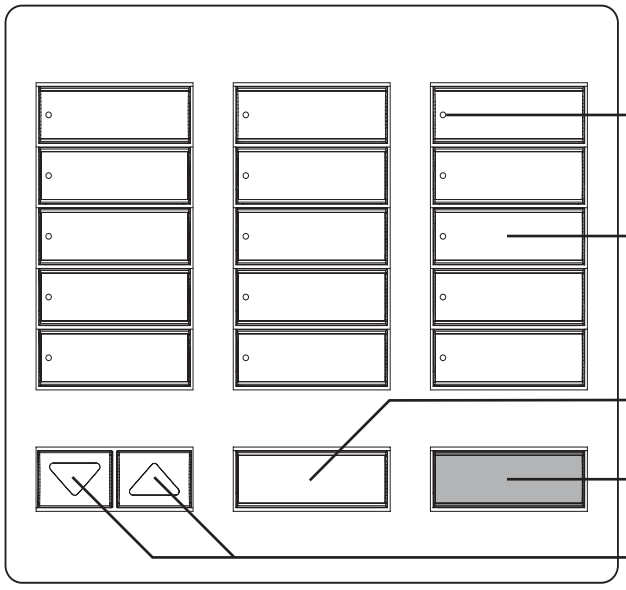

Status LEDs
Show which keypad button has been activated.

Keypad Buttons
Press to activate desired levels or positions.

All On Button
Turn all lights to full on and shades/draperies to open.

All Off Button
Turn all lights off and shades/draperies to closed.

Raise/Lower Buttons
Lights increase or decrease in intensity and shades/draperies move towards the open or close limit.

HomeWorks QS RF seeTouch Tabletop Keypads

Colors and Finishes

Keypads and Engraved Button Kits

Satin Finishes

Snow
SW


Midnight
MN

Engraved Faceplate Kits

Satin Finishes

Snow
SW


Midnight
MN

- Due to printing limitations, colors and finishes shown cannot be guaranteed to perfectly match actual product colors.
- Color chip keychains are available for more precise color matching:

  Satin Finishes: SC-CK-1
  Architectural Metal Finishes: AMTL-CK-1

Engraved Faceplate Kits

Metal Finishes

When ordering metal faceplates, it is recommended to order the keypad in Midnight (MN).

Satin Brass
SB

Bright Brass
BB

Bright Chrome
BC

Clear Anodized
Aluminum
CLA


Black Anodized
Aluminum
BLA


Brass Anodized
Aluminum
BRA


Antique Brass
QB


Antique Bronze
QZ

Satin Chrome
SC


Satin Nickel
SN

Bright Nickel
BN

The Lutron logo, Lutron, HomeWorks, and seeTouch are trademarks or registered trademarks of Lutron Electronics Co., Inc., in the U.S. and/or other countries.