



## VOLTAGE DROP GUIDANCE CHART


### Standard Non-XT 24V Voltage Drop & Wire Length Distance Chart (3% Drop or 24V)

Wire Gauge	Copper Wire Resistance (Ω/kFT)	10W (0.42A)	20W (0.83A)	30W (1.25A)	40W (1.67A)	50W (2.08A)	60W (2.50A)	70W (2.92A)	80W (3.33A)	90W (3.75A)	96W (4A)
22 AWG	16.14	54 ft.	27 ft.	18 ft.	14 ft.	11 ft.	9 ft.	8 ft.	7 ft.	6 ft.	6 ft.
20 AWG	10.15	86 ft.	43 ft.	29 ft.	22 ft.	18 ft.	15 ft.	13 ft.	11 ft.	10 ft.	9 ft.
18 AWG	6.39	136 ft.	68 ft.	46 ft.	34 ft.	28 ft.	23 ft.	20 ft.	17 ft.	16 ft.	15 ft.
16 AWG	4.02	216 ft.	108 ft.	72 ft.	54 ft.	44 ft.	36 ft.	31 ft.	27 ft.	24 ft.	23 ft.
14 AWG	2.53	343 ft.	172 ft.	115 ft.	86 ft.	69 ft.	58 ft.	49 ft.	43 ft.	39 ft.	36 ft.
12 AWG	1.59	545 ft.	273 ft.	182 ft.	137 ft.	109 ft.	91 ft.	78 ft.	69 ft.	61 ft.	57 ft.
10 AWG	0.99	865 ft.	433 ft.	289 ft.	217 ft.	173 ft.	145 ft.	124 ft.	109 ft.	97 ft.	91 ft.


Note: These tables provide general guidelines for determining Wire Gauge based on total load and distance from LED driver to beginning of luminaire.

## ACCESSORIES (SOLD SEPARATELY)

**AmpChamp:** For a more secure connection



Accepts many combinations of tape and wire. Includes one mounting clip, 3M® adhesive backing, and pre-attached 6 inch in-wall-rated 18 AWG lead wire.



Note: AmpChamp Corner does not include the pre-attached 6 inch in-wall-rated 18 AWG lead wire.

### Straight AmpChamp


AL-01-80-9900  
AL-01-80-9900-10 (10-pack)  
AL-01-80-9900-100 (100-pack)

### AmpChamp Corner

AL-01-80-9900-L


### AmpChamp Up/Down

AL-01-80-9900-UD  
AL-01-80-9900-UD-10 (10-pack)




**AmpChamp Jumper and Power Feed Kits**

**AmpChamp Jumper Kit** includes two standard AmpChamp Kits and one pre-tinned 18 AWG jumper wire.



AL-01-80-9900-3IN-JK (3 in. jumper wire)  
AL-01-80-9900-6IN-JK (6 in. jumper wire)  
AL-01-80-9900-36IN-JK (36 in. jumper wire)

**AmpChamp Power Feed Kit** includes one standard AmpChamp Kit and one pre-tinned 18 AWG power feed wire.




AL-01-80-9900-36IN-PK (36 in. power feed wire)  
AL-01-80-9900-8FT-PK (8 ft. power feed wire)

## Wire and Tape Light Management


We recommend the use of the wire and tape harness.

- At least 1 wire harness at the beginning to secure the lead wire; for longer lead wires, place a harness every 2 feet
- 1 tape harness every 2 feet and 1 harness at the end of the tape light to secure it

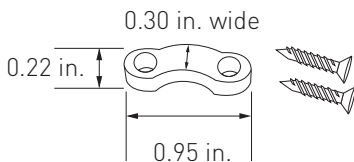

### Wire Harness

Holds wire in place securely  
AL-01-99-9901-10 (10-pack)

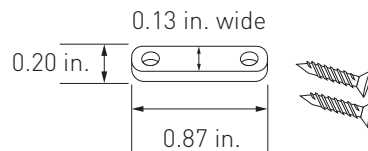














### Tape Harness

Provides extra security for tape light, especially at the ends of a run  
AL-01-99-9900-10 (10-pack)

# ALLOY LED® Specifications

## COMPATIBLE CHANNELS (Diagrams below not to scale)



### Reduced Hotspot Pairings (Hotspot Rating from 0-5)

<p><b>Surfa 2: Corner-Mount</b></p>  <p>Hotspot Rating: 1</p> <ul style="list-style-type: none"> <li><input checked="" type="checkbox"/> Solder</li> <li><input type="checkbox"/> AmpChamp</li> </ul>	<p><b>Surfa 2X: Corner-Mount</b></p>  <p>Hotspot Rating: 0</p> <ul style="list-style-type: none"> <li><input checked="" type="checkbox"/> Solder</li> <li><input checked="" type="checkbox"/> AmpChamp</li> </ul>	<p><b>Surfa 6: Surface-Mount</b></p>  <p>Hotspot ratings depend on dimming percentage</p> <p>Hotspot Rating: 1-2</p> <ul style="list-style-type: none"> <li><input checked="" type="checkbox"/> Solder</li> <li><input checked="" type="checkbox"/> AmpChamp</li> </ul>
<p><b>Surfa 6 Surround: Surface-Mount</b></p>  <p>Hotspot Rating: 0</p> <ul style="list-style-type: none"> <li><input checked="" type="checkbox"/> Solder</li> <li><input checked="" type="checkbox"/> AmpChamp</li> </ul>	<p><b>Surfa 7: Surface-Mount</b></p>  <p>Hotspot Rating: 0</p> <ul style="list-style-type: none"> <li><input checked="" type="checkbox"/> Solder</li> <li><input type="checkbox"/> AmpChamp</li> </ul>	<p><b>Suspan 1: Suspended</b></p>  <p>Hotspot Rating: 0</p> <ul style="list-style-type: none"> <li><input checked="" type="checkbox"/> Solder</li> <li><input checked="" type="checkbox"/> AmpChamp</li> </ul>
<p><b>Ankr 1: In-Wall</b></p>  <p>Hotspot Rating: 0</p> <ul style="list-style-type: none"> <li><input checked="" type="checkbox"/> Solder</li> <li><input checked="" type="checkbox"/> AmpChamp</li> </ul>	<p><b>Ankr 2: In-Wall</b></p>  <p>Hotspot Rating: 0</p> <ul style="list-style-type: none"> <li><input checked="" type="checkbox"/> Solder</li> <li><input checked="" type="checkbox"/> AmpChamp</li> </ul>	<p><b>Ankr 3: In-Wall</b></p>  <p>Hotspot Rating: 0</p> <ul style="list-style-type: none"> <li><input checked="" type="checkbox"/> Solder</li> <li><input type="checkbox"/> AmpChamp</li> </ul>
<p><b>Ankr 4: Mud-In</b></p>  <p>Hotspot Rating: 0</p> <ul style="list-style-type: none"> <li><input checked="" type="checkbox"/> Solder</li> <li><input type="checkbox"/> AmpChamp</li> </ul>	<p><b>Duro 1: In-Ground</b></p>  <p>Hotspot Rating: 0</p> <ul style="list-style-type: none"> <li><input checked="" type="checkbox"/> Solder</li> <li><input type="checkbox"/> AmpChamp</li> </ul>	<p><b>Duro 2: In-Ground</b></p>  <p>Hotspot Rating: 1</p> <ul style="list-style-type: none"> <li><input checked="" type="checkbox"/> Solder</li> <li><input type="checkbox"/> AmpChamp</li> </ul>
<p><b>Naro 4: Recessed</b></p>  <p>Hotspot Rating: 1</p> <ul style="list-style-type: none"> <li><input checked="" type="checkbox"/> Solder</li> <li><input checked="" type="checkbox"/> AmpChamp</li> </ul>		

# ALLOY LED® Specifications

## COMPATIBLE CHANNELS (Diagrams below not to scale)

### Other Compatible Pairings (Hotspot Rating from 0-5)


<p><b>Surfa 1: Surface-Mount</b></p>  <p>Hotspot ratings depend on dimming percentage Hotspot Rating: 2-3</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> Solder</li><li><input type="checkbox"/> AmpChamp</li></ul>	<p><b>Polymer: Surface-Mount</b></p>  <p>Hotspot ratings depend on dimming percentage Hotspot Rating: 2-3</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> Solder</li><li><input checked="" type="checkbox"/> AmpChamp</li></ul>
---	--

# ALLOY LED® Specifications


## RECOMMENDED POWER SUPPLIES (SOLD SEPARATELY)



Alloy LED PowerFactor™ Dimmable Power Supplies w/ Integrated UL Listed Junction Box  
Compact, highly efficient, and code-compliant power supply with versatile and smooth dimming capabilities.

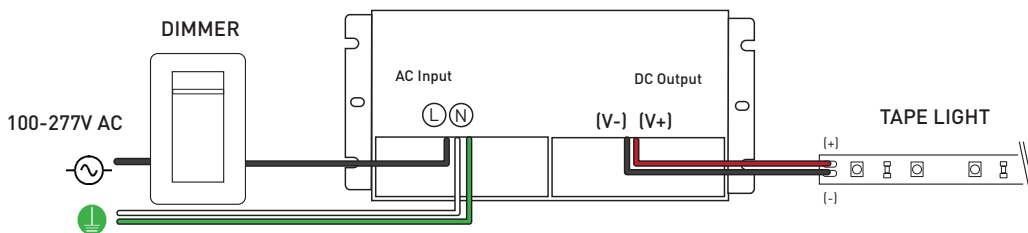

Wiring diagram is for reference ONLY. Please refer to dimmer wiring specifications sheet for accurate directions.

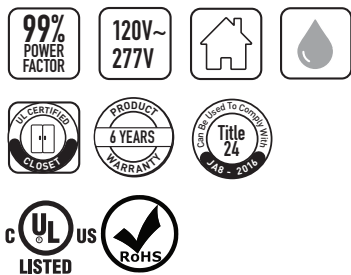

### Single Tap Models

Item Number	Output Voltage	Wattage	Wet Location	Minimum Load	Dimensions (L x W x H)	Class 2
AL-98-10-12030	12V DC	30W	Yes (NEMA 4X)	10%	6.50 x 3.72 x 1.02 in.	Yes
AL-98-10-12060	12V DC	60W	Yes (NEMA 4X)	10%	7.40 x 3.72 x 1.02 in.	Yes
AL-98-10-12120	12V DC	120W	Yes (NEMA 4X)	10%	8.66 x 3.72 x 1.57 in.	No
AL-98-10-24030	24V DC	30W	Yes (NEMA 4X)	10%	6.50 x 3.72 x 1.02 in.	Yes
AL-98-10-24060	24V DC	60W	Yes (NEMA 4X)	10%	7.40 x 3.72 x 1.02 in.	Yes
AL-98-10-24096	24V DC	96W	Yes (NEMA 4X)	10%	8.66 x 3.72 x 1.57 in.	Yes
AL-98-10-24150	24V DC	150W	Yes (NEMA 4X)	10%	10.24 x 4.13 x 1.77 in.	No
AL-98-10-24200	24V DC	200W	Yes (NEMA 4X)	10%	10.24 x 4.13 x 1.77 in.	No
AL-98-10-24300	24V DC	300W	Yes (NEMA 4X)	10%	10.94 x 4.33 x 1.77 in.	No

### Class 2 Compliant Multi-Tap Models

Item Number	Output Voltage	Wattage	Wet Location	Minimum Load	Dimensions (L x W x H)	Class 2
AL-98-10-12300-MT	12V DC	300W	Yes (NEMA 4X)	10%	11.85 x 4.33 x 1.77 in.	Yes
AL-98-10-24192-MT	24V DC	192W	Yes (NEMA 4X)	10%	10.94 x 4.33 x 1.77 in.	Yes
AL-98-10-24288-MT	24V DC	288W	Yes (NEMA 4X)	10%	11.85 x 4.33 x 1.77 in.	Yes

Note: PowerFactor assumes 80% load.  
Inspectors prefer power supply to be used with junction box.  
For dimmer compatibility, refer to drivers specification sheet.

# ALLOY LED® Specifications

## RECOMMENDED POWER SUPPLIES (SOLD SEPARATELY)


Alloy LED Primavolt® No Minimum Load Dimmable Power Supplies w/ETL Listed Junction Box  
Code-compliant power supply with versatile and smooth dimming capabilities. Compatible with ELV, MLV, and TRIAC dimmers.



White model for 60W and lower



Black model for 80W and higher

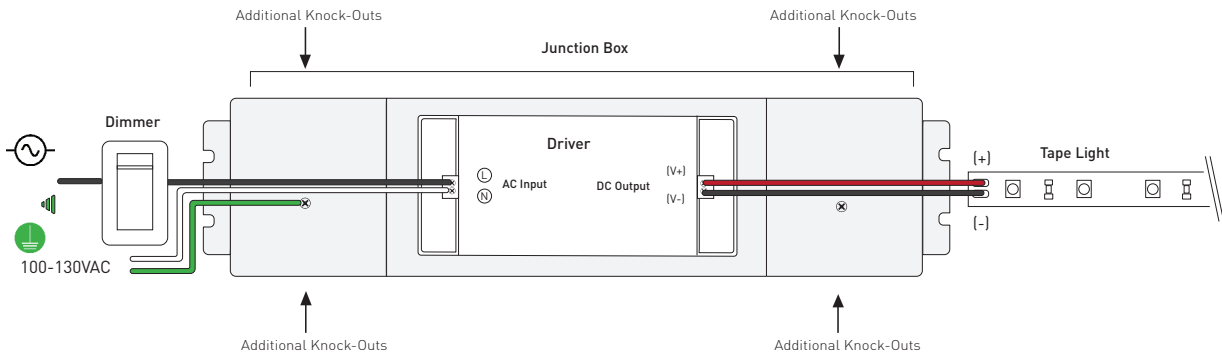

Wiring diagram is for reference ONLY. Please refer to dimmer wiring specifications sheet for accurate directions.



Item Number	Output Voltage	Wattage	Minimum Load	Dimensions (Junction box) (L x W x H)	Class 2
AL-98-03-12024-NM	12V DC	24W	0%	13.78 x 3.03 x 1.46 in.	Yes
AL-98-03-12048-NM	12V DC	48W	0%	13.78 x 3.03 x 1.46 in.	Yes
AL-98-03-12060-NM	12V DC	60W	0%	13.78 x 3.03 x 1.46 in.	Yes
AL-98-03-12080-NM	12V DC	80W	0%	14.96 x 3.03 x 2.24 in.	No
AL-98-03-12120-NM	12V DC	120W	0%	14.96 x 3.03 x 2.24 in.	No
AL-98-03-24024-NM	24V DC	24W	0%	13.78 x 3.03 x 1.46 in.	Yes
AL-98-03-24048-NM	24V DC	48W	0%	13.78 x 3.03 x 1.46 in.	Yes
AL-98-03-24060-NM	24V DC	60W	0%	13.78 x 3.03 x 1.46 in.	Yes
AL-98-03-24080-NM	24V DC	80W	0%	14.96 x 3.03 x 2.24 in.	Yes
AL-98-03-24096-NM	24V DC	96W	0%	14.96 x 3.03 x 2.24 in.	Yes
AL-98-03-24150-NM	24V DC	150W	0%	15.98 x 3.43 x 2.36 in.	No
AL-98-03-24200-NM	24V DC	200W	0%	15.98 x 3.43 x 2.36 in.	No

Note: Alloy LED strongly recommends using Listed Class 2 power supplies for all installations. Always install in accordance with local and national electrical code regulations. Inspectors prefer power supply to be used with junction box. For dimmer compatibility, refer to drivers specification sheet.

# ALLOY LED® Specifications

## DIMMING ACCESSORIES (SOLD SEPARATELY)

### Lutron® Dimming Accessories

By participating in Lutron's OEM Advantage program, Alloy LED is able to offer a range of the highest quality low voltage power supplies and selected controls on the market.



Hi-lume Premier  
0.1% EcoSystem /  
3-wire LED Driver  
(96W 24VDC)



Hi-lume 1% LED Driver 40W  
- EcoSystem / 3-wire control  
- 2-wire 120V forward  
phase control



Lutron Vive PowPak RF Module  
- RF module for EcoSystem LED  
driver control  
- Use with the Lutron EcoSystem  
drivers shown to "Vive-enable"  
Alloy LED products

### Lutron® Hi-lume LED Drivers

Item #	Output	Wattage	Min. Load	Class 2
AL-98-07-12040	12V DC	40W	N/A	Yes
AL-98-07-12040-3WIRE	12V DC	40W	N/A	Yes
AL-98-07-24040	24V DC	40W	N/A	Yes
AL-98-07-24040-3WIRE	24V DC	40W	N/A	Yes
AL-98-07-24096-3WIRE	24V DC	96W	N/A	Yes

### Lutron® Controls

Item #	Description	Voltage
AL-98-07-9901	EcoSystem Control Module	N/A
AL-98-07-9901-8	EcoSystem Control Module - 8 pack	N/A
AL-98-07-9950	CL Dimmer	120V AC
AL-98-07-9950-FPLATE	CL Dimmer faceplate	N/A


## DIMMING ACCESSORIES (SOLD SEPARATELY)

### Dimmers & Switches

#### SlimDim Wireless Dimmers

Using long-range RF technology, these LED dimmers connect wirelessly to a receiver, offering freedom to mount anywhere. Can also be used as a fob for mobile, hand-held control.


AL-70-01-0001	SlimDim Wireless Dimmer
AL-70-01-0002	Single Color Receiver (96W maximum) (sold separately)
AL-98-07-9950-FPLATE	SlimDim Wall Plate (sold separately)

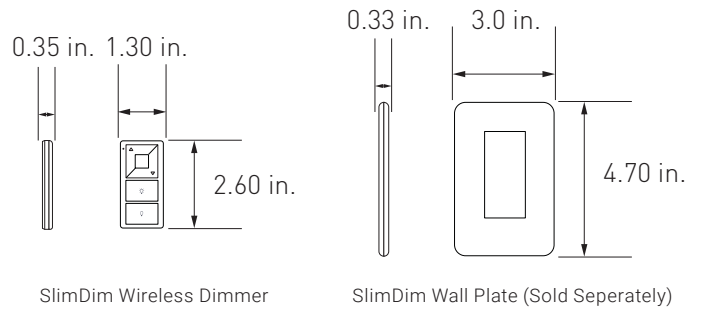

#### Remote Control Dimmer Switch

Provides full dimming and on/off control, and includes a touch wheel that allows for direct visual selection of brightness. It can also operate up to four independent zones.


AL-60-03-0001	Remote Control Dimmer Switch
AL-70-01-0002	Single Channel Receiver (sold separately)
AL-60-03-0004-V2	Wireless Receiver (RGB & RGB-W) (sold separately)

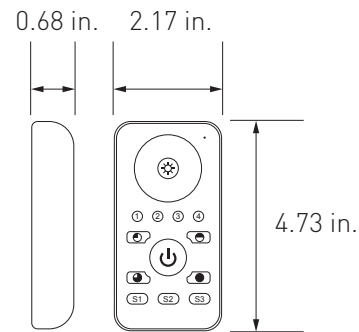


#### Single Channel Wireless Receiver

Pair with the Remote Control Dimmer Switch or the SlimDim Wireless Dimmer to dim Primaline tape lights. Use one remote to make independent lighting zones with multiple receivers with certain controllers.

AL-70-01-0002	Single Channel Wireless Receiver
---------------	----------------------------------


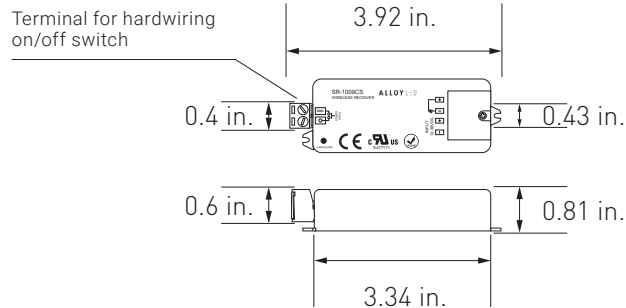


## WIRING DIAGRAM

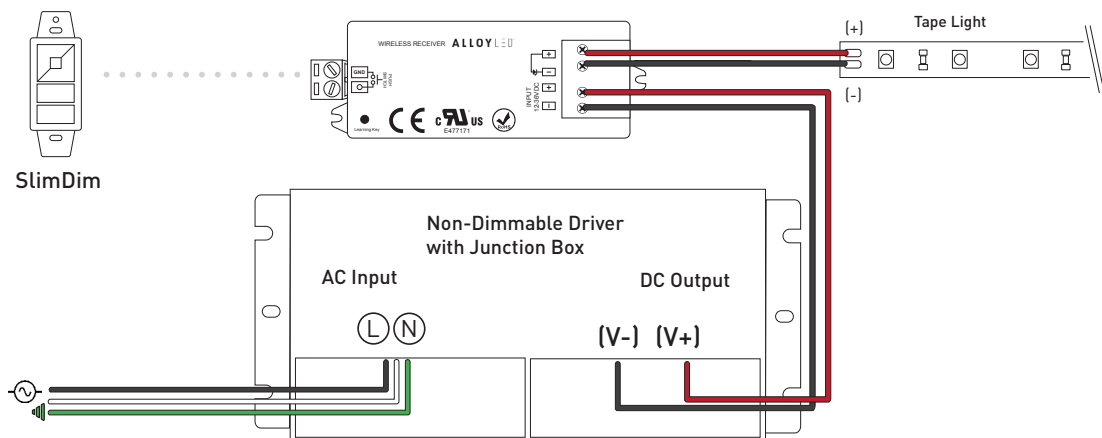


Note: specifications are representative of the diode type and not a particular tape light article.


20%

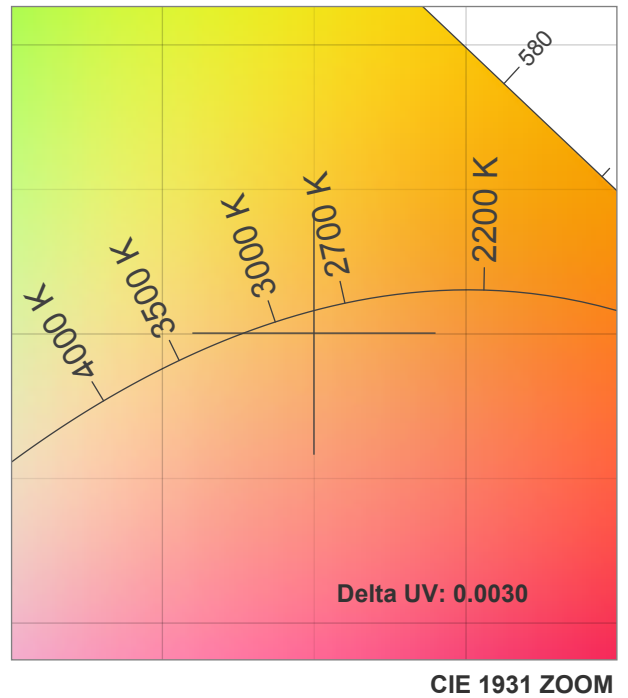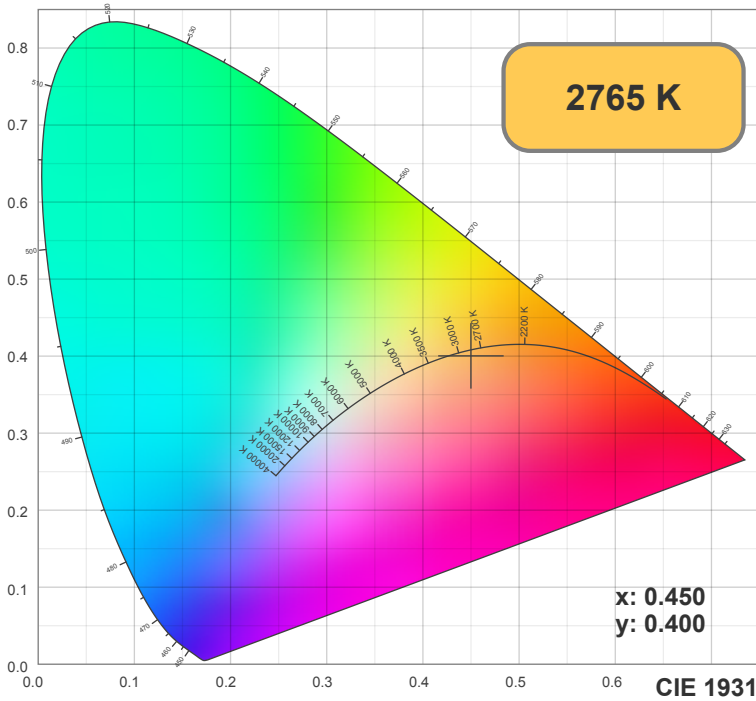

TM30: 93.2

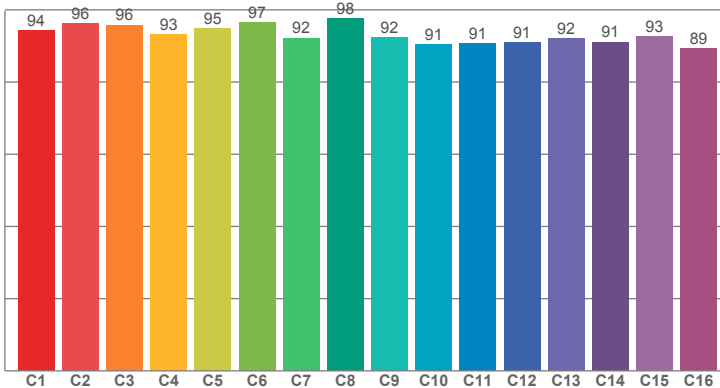

CRI: 97.1 (R1-R8)

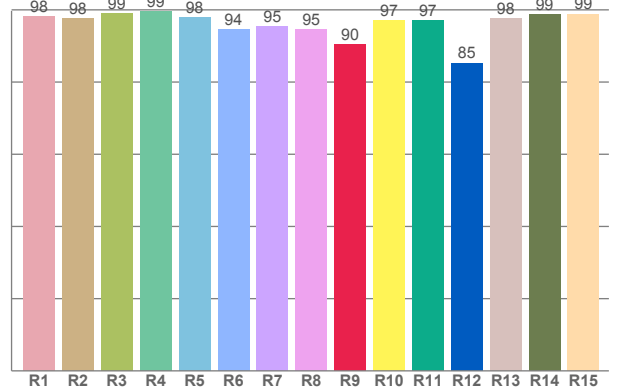

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.18	97.69	98.93	99.47	97.87	94.49	95.29	94.65	90.50	97.01	97.07	85.27	97.64	98.78	98.85


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
94.30	96.28	95.81	93.16	94.95	96.53	92.24	97.57	92.44	90.51	90.71	90.87	92.07	91.10	92.68	89.25

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
92.44	95.38	92.61	92.01	93.77	96.74	93.76	94.27	97.42	96.53	96.01	95.67	95.37	93.68	93.75

CQS: 94.3

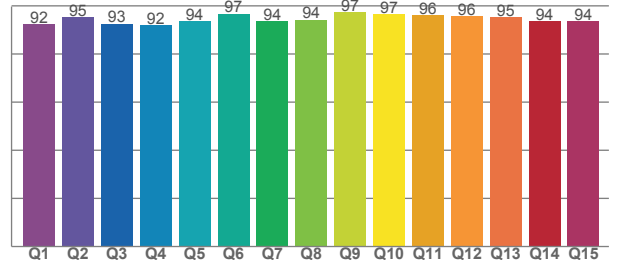

Color parameters

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Duv
2765 K	97.1	90.5	93.2	100.5	94.3	0.4	0.4	0.3	0.3	-0.0030







Note: specifications are representative of the diode type and not a particular tape light article.

20%

**Rf 93.2**  
Fidelity index Rf


**Rg 100.5**  
Gammut index Rg

Hue Bin	R <sub>f</sub>	Graphic shifts (%)	
		Chroma	Hue
1	94	-1%	1%
2	96	0%	1%
3	96	0%	1%
4	93	-3%	-2%
5	95	-2%	1%
6	97	0%	1%
7	92	-3%	3%
8	98	0%	1%
9	92	1%	4%
10	91	2%	6%
11	91	4%	5%
12	91	5%	-2%
13	92	1%	-5%
14	91	3%	-6%
15	93	-2%	0%
16	89	0%	-8%

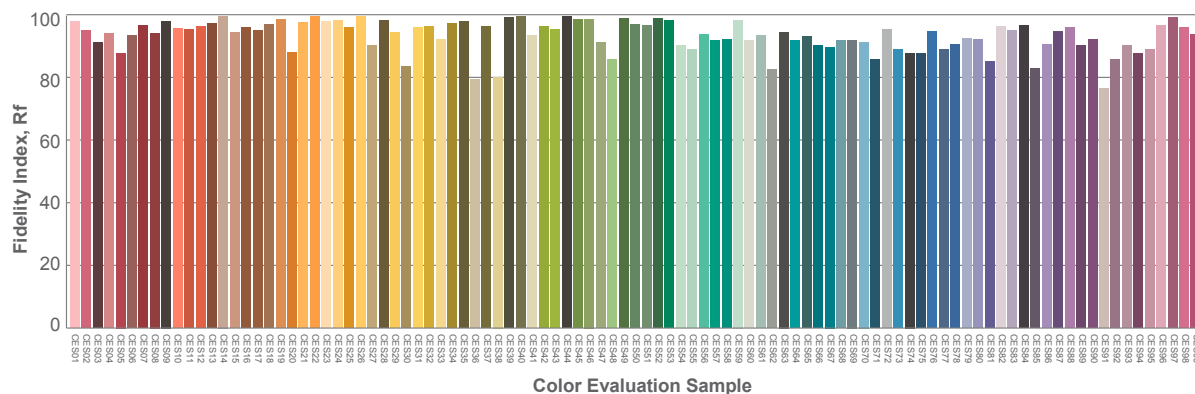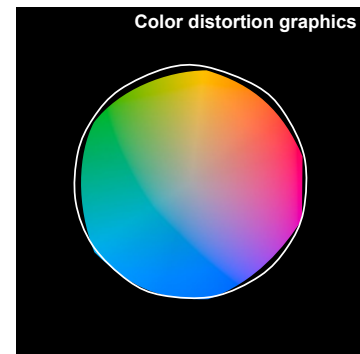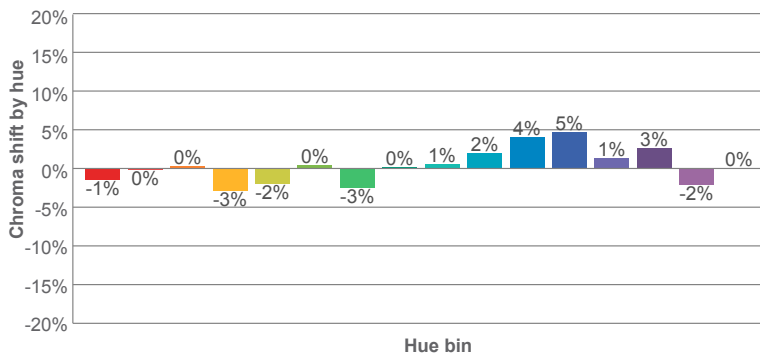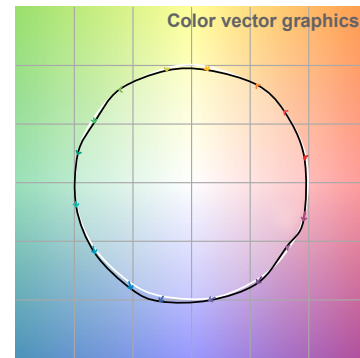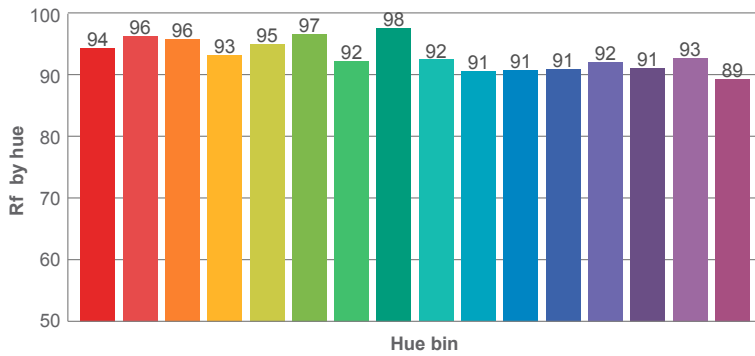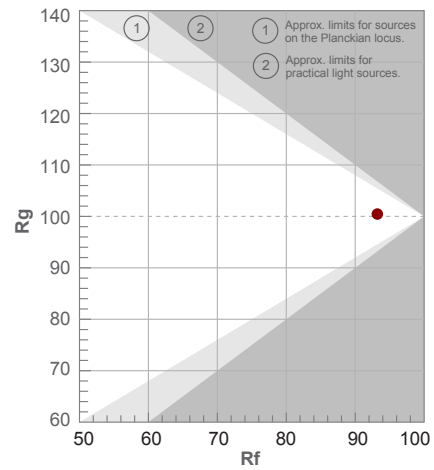

Note: specifications are representative of the diode type and not a particular tape light article.

20%

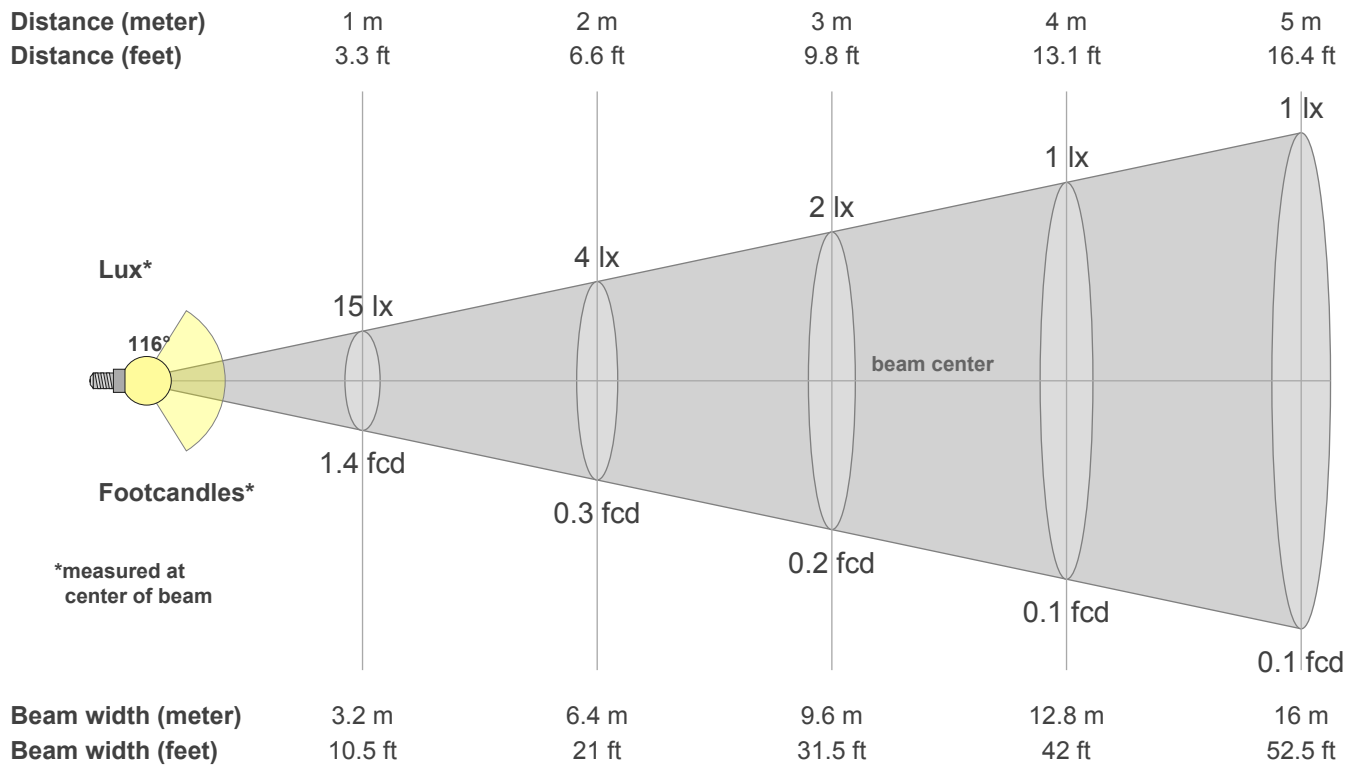

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
14.9	14.9	14.8	14.4	14.1	13.5	12.9	12.1	11.3	10.4	9.4	8.2	7.0	5.7	4.4	3.1	1.8	0.7	0.2	0.2
100%	100%	99%	97%	94%	91%	86%	81%	75%	70%	63%	55%	47%	38%	30%	21%	12%	5%	1%	1%

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
14.9	14.9	14.8	14.4	14.1	13.5	12.9	12.1	11.3	10.4	9.4	8.2	7.0	5.7	4.4	3.1	1.8	0.7	0.2	0.2
100%	100%	99%	97%	94%	91%	86%	81%	75%	70%	63%	55%	47%	38%	30%	21%	12%	5%	1%	1%

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
14.9	15.0	14.7	14.5	14.1	13.6	12.9	12.2	11.3	10.4	9.3	8.2	7.0	5.7	4.3	3.0	1.7	0.7	0.2	0.2
100%	100%	99%	97%	94%	91%	87%	82%	76%	70%	63%	55%	47%	38%	29%	20%	12%	5%	1%	1%



Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
14.9	15.0	14.7	14.5	14.1	13.6	12.9	12.2	11.3	10.4	9.3	8.2	7.0	5.7	4.3	3.0	1.7	0.7	0.2	0.2
100%	100%	99%	97%	94%	91%	87%	82%	76%	70%	63%	55%	47%	38%	29%	20%	12%	5%	1%	1%


Beam angle 50%	Field angle 10%	Cutoff angle 2.5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
116.0°	162.4°	360.0°	75.4%	50.7%

Note: specifications are representative of the diode type and not a particular tape light article.


50%

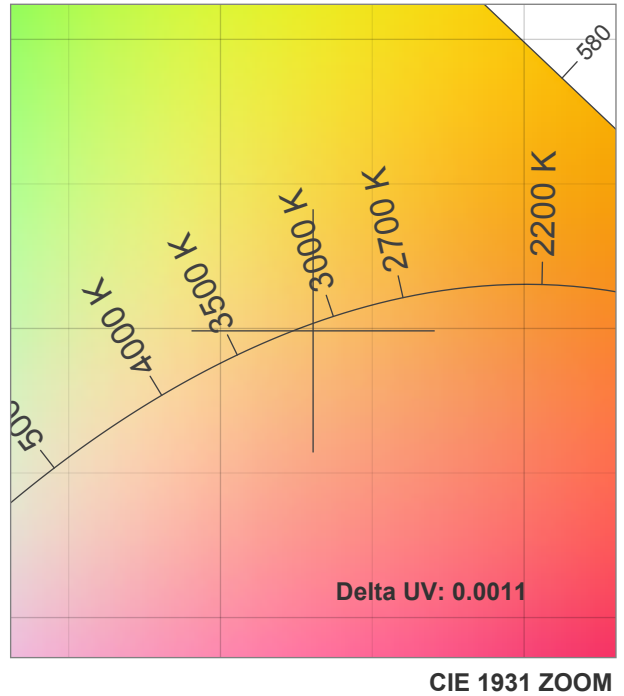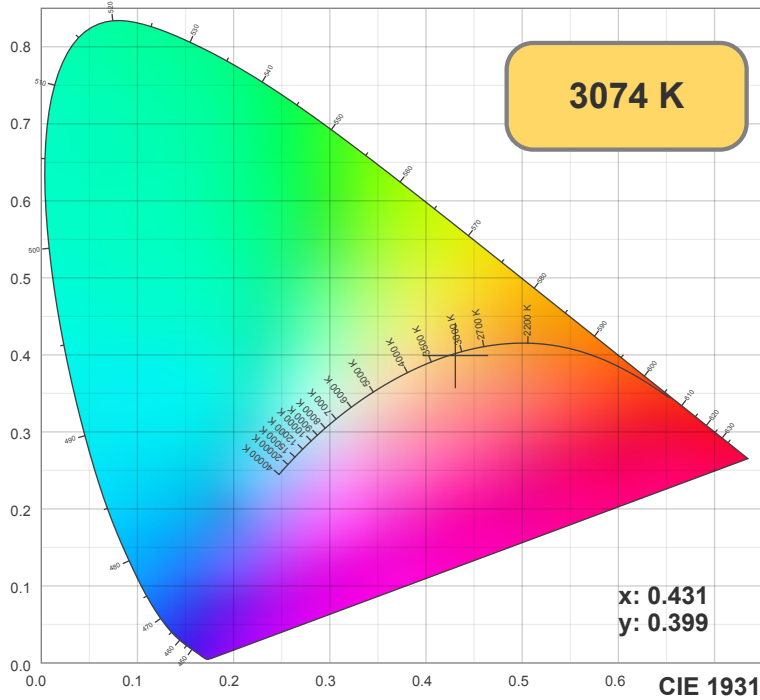

TM30: 91.4

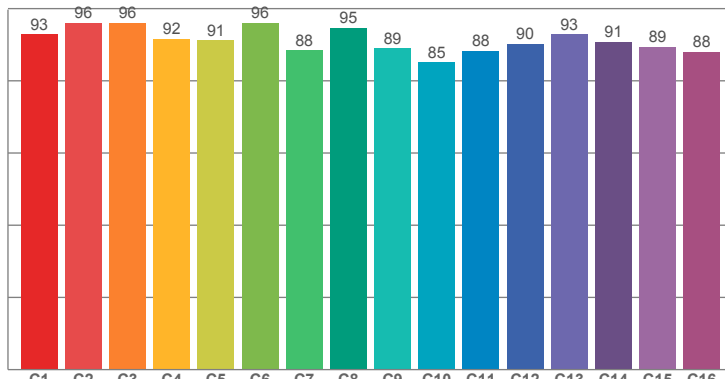

CRI: 97.4 (R1-R8)

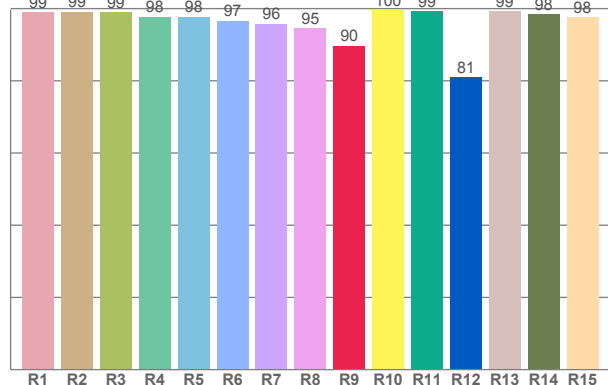

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.91	99.13	98.93	97.73	97.67	96.63	95.76	94.52	89.73	99.56	99.19	80.96	99.18	98.38	97.55


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92.86	96.04	96.10	91.64	91.22	96.02	88.39	94.68	88.96	85.18	88.31	90.30	92.83	90.85	89.39	88.04

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
90.75	95.88	92.08	90.30	91.71	94.09	96.58	96.32	98.07	97.52	97.16	97.35	97.22	95.08	93.77

CQS: 94.1

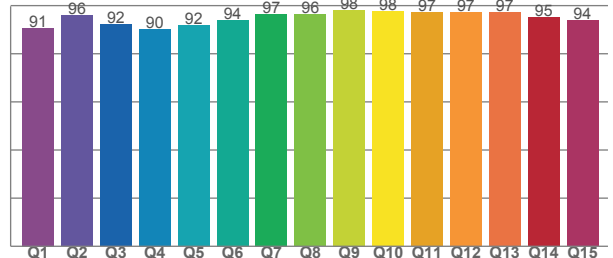

Color parameters

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Duv
3074 K	97.4	89.7	91.4	98.9	94.1	0.4	0.4	0.2	0.3	-0.0011







Note: specifications are representative of the diode type and not a particular tape light article.

50%

**Rf 91.4**  
Fidelity index Rf


**Rg 98.9**  
Gammut index Rg

Hue Bin	R <sub>f</sub>	Graphic shifts (%)	
		Chroma	Hue
1	93	-2%	2%
2	96	-1%	0%
3	96	0%	0%
4	92	-4%	-2%
5	91	-7%	0%
6	96	-2%	1%
7	88	-5%	5%
8	95	-1%	3%
9	89	0%	7%
10	85	2%	8%
11	88	4%	6%
12	90	6%	-1%
13	93	1%	-5%
14	91	3%	-5%
15	89	-2%	-2%
16	88	1%	-8%

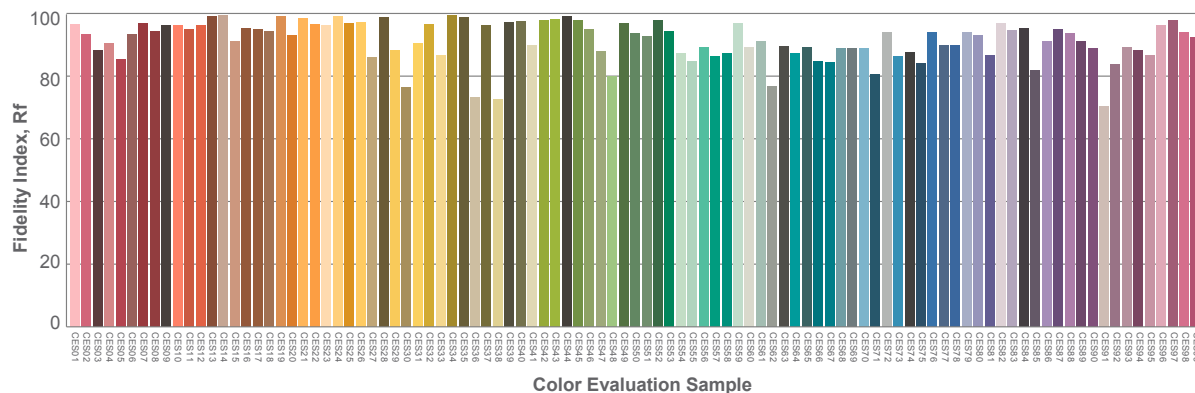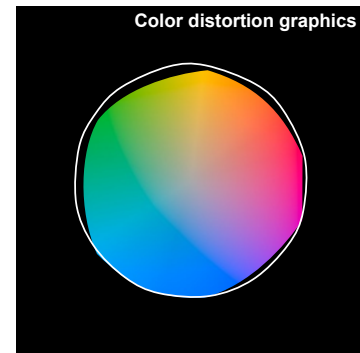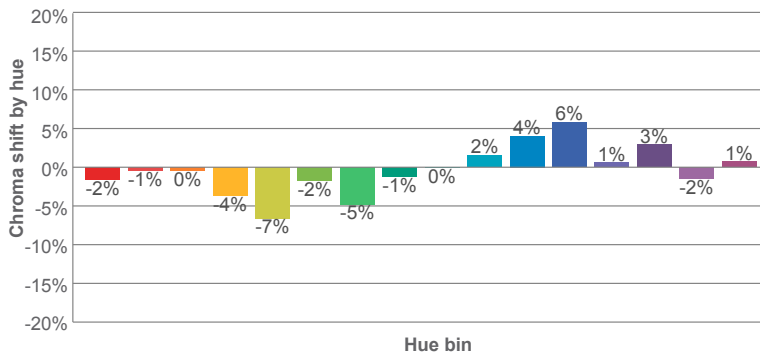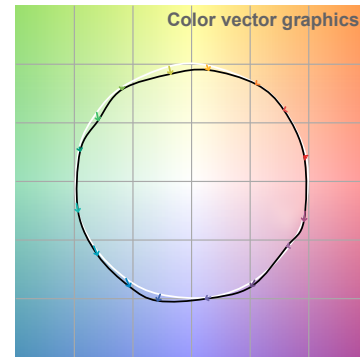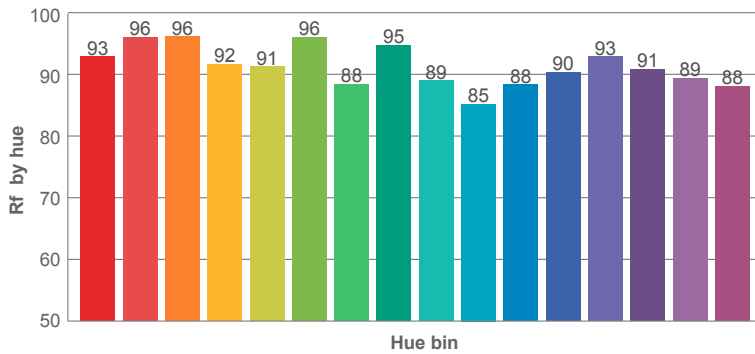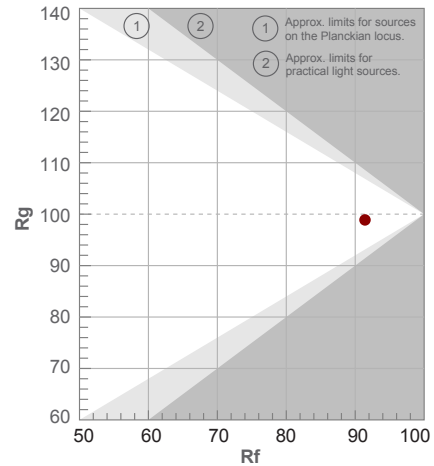

Note: specifications are representative of the diode type and not a particular tape light article.

50%

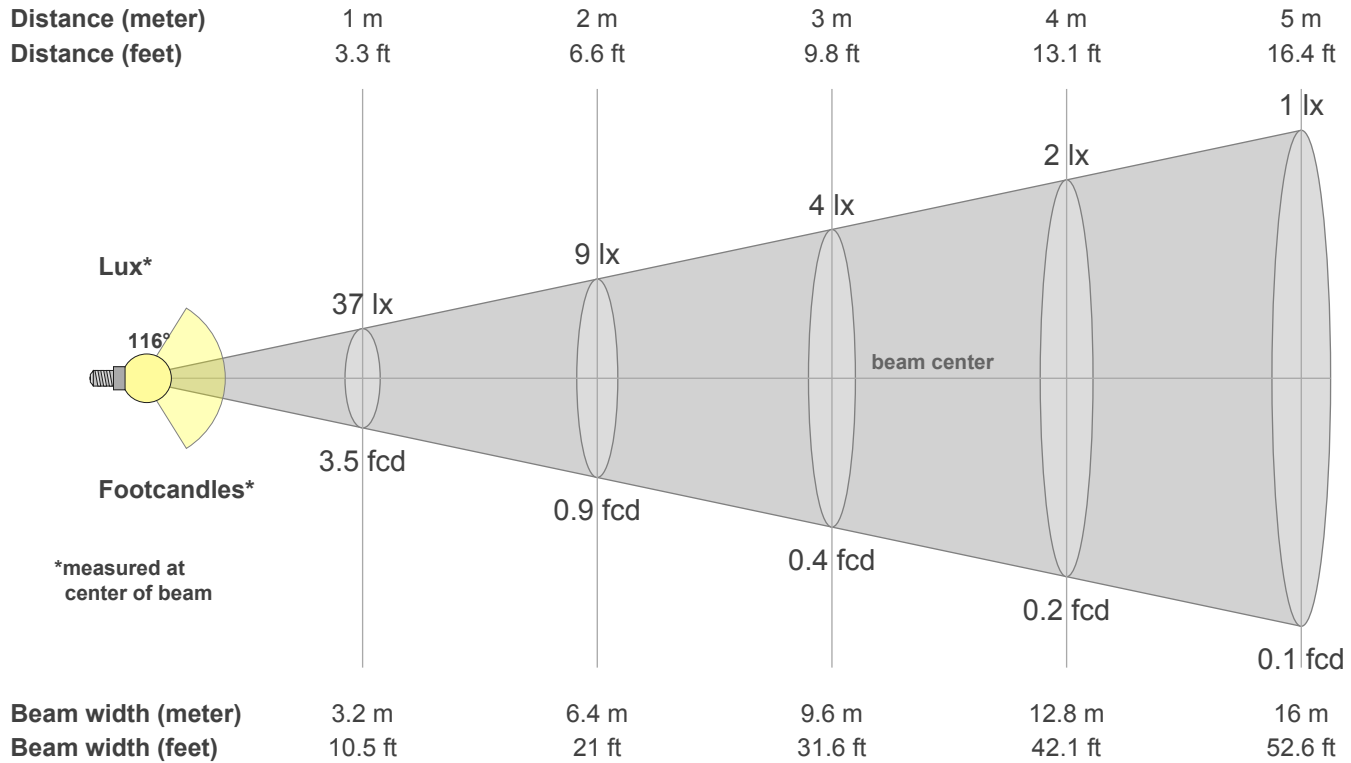

**Intensities in 0° c-plane**

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
37.3	37.2	36.7	36.0	35.0	33.7	32.2	30.4	28.3	25.9	23.3	20.5	17.5	14.3	10.9	7.6	4.5	2.0	0.6	0.4
100%	100%	98%	97%	94%	90%	86%	81%	76%	69%	62%	55%	47%	38%	29%	20%	12%	5%	2%	1%

**Intensities in 0° c-plane**

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
37.3	37.2	36.7	36.0	35.0	33.7	32.2	30.4	28.3	25.9	23.3	20.5	17.5	14.3	10.9	7.6	4.5	2.0	0.6	0.4
100%	100%	98%	97%	94%	90%	86%	81%	76%	69%	62%	55%	47%	38%	29%	20%	12%	5%	2%	1%

**Intensities in 180° c-plane**

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
37.3	37.2	36.8	36.0	35.1	33.8	32.2	30.4	28.3	25.9	23.3	20.5	17.4	14.2	10.9	7.5	4.4	1.8	0.6	0.4
100%	100%	99%	97%	94%	91%	86%	81%	76%	70%	63%	55%	47%	38%	29%	20%	12%	5%	2%	1%



**Intensities in 180° c-plane**

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
37.3	37.2	36.8	36.0	35.1	33.8	32.2	30.4	28.3	25.9	23.3	20.5	17.4	14.2	10.9	7.5	4.4	1.8	0.6	0.4
100%	100%	99%	97%	94%	91%	86%	81%	76%	70%	63%	55%	47%	38%	29%	20%	12%	5%	2%	1%


Beam angle 50%	Field angle 10%	Cutoff angle 2.5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
116.1°	162.5°	360.0°	75.3%	50.7%

Note: specifications are representative of the diode type and not a particular tape light article.


100%

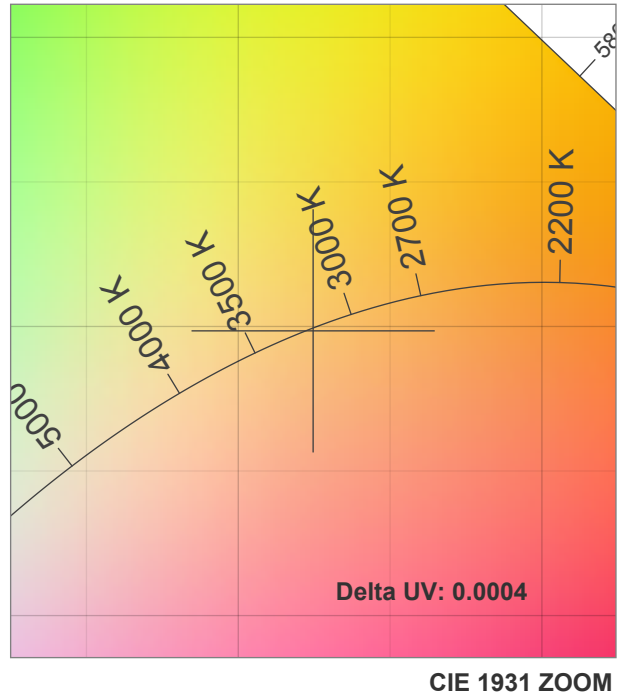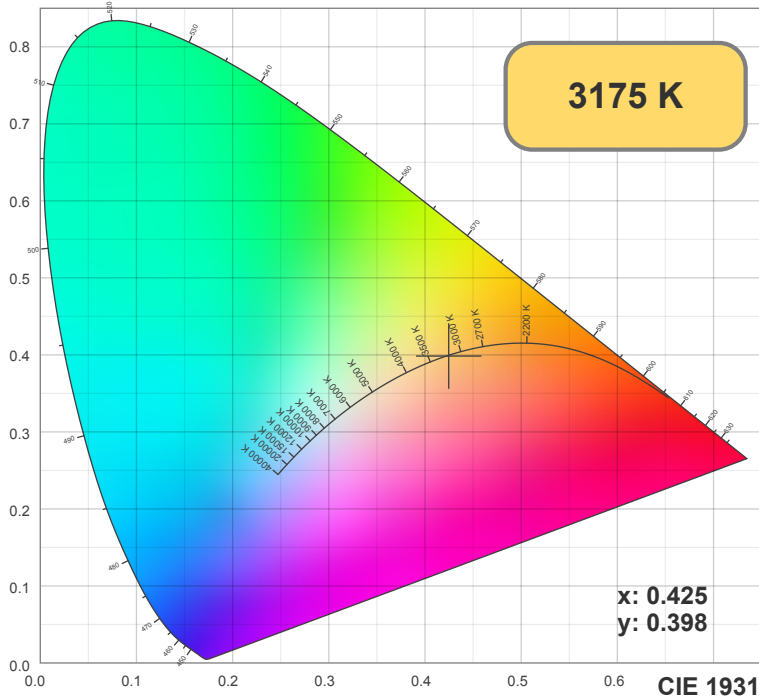

TM30: 90.7

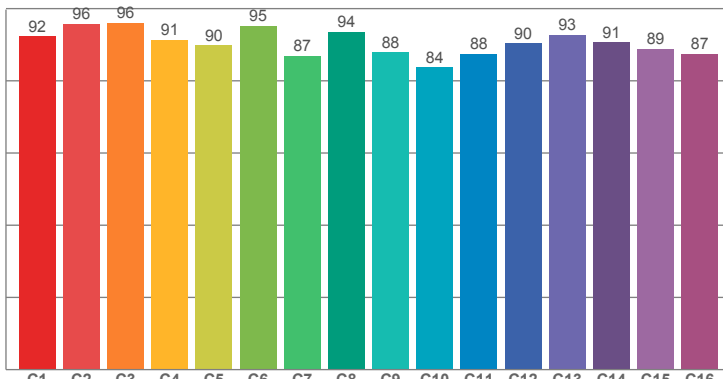

CRI: 97.2 (R1-R8)

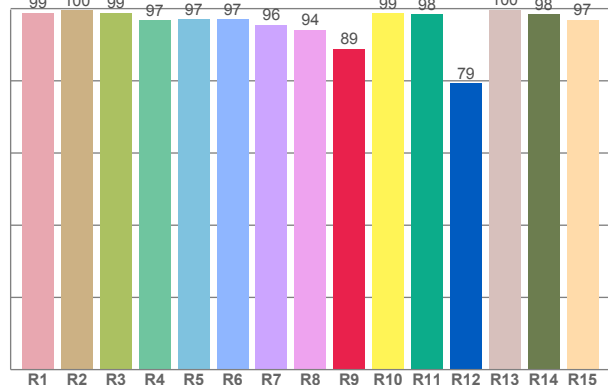

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.81	99.54	98.87	96.75	97.08	96.99	95.56	94.09	88.84	98.66	98.41	79.35	99.61	98.38	96.94


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92.28	95.80	96.07	91.38	89.87	95.26	86.86	93.51	87.83	83.73	87.53	90.31	92.79	90.66	88.89	87.49

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
90.13	95.69	92.04	89.71	90.88	92.96	96.98	96.70	98.05	97.79	97.39	97.66	97.58	95.26	93.65

CQS: 93.9

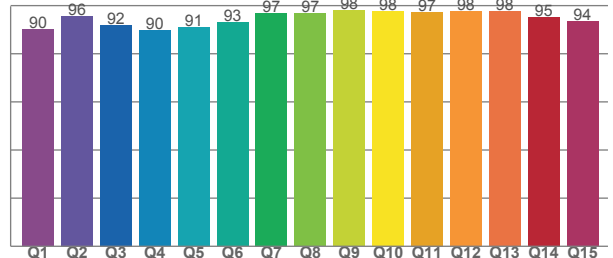

Color parameters

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Duv
3175 K	97.2	88.8	90.7	98.3	93.9	0.4	0.4	0.2	0.3	-0.0004







Note: specifications are representative of the diode type and not a particular tape light article.

100%

**Rf 90.7**  
Fidelity index Rf

**Rg 98.3**  
Gammut index Rg


Hue Bin	R <sub>f</sub>	Graphic shifts (%)	
		Chroma	Hue
1	92	-2%	2%
2	96	-1%	0%
3	96	-1%	0%
4	91	-4%	-2%
5	90	-8%	-1%
6	95	-2%	1%
7	87	-6%	5%
8	94	-2%	3%
9	88	0%	8%
10	84	2%	9%
11	88	4%	7%
12	90	6%	-1%
13	93	0%	-5%
14	91	3%	-5%
15	89	-2%	-2%
16	87	1%	-8%

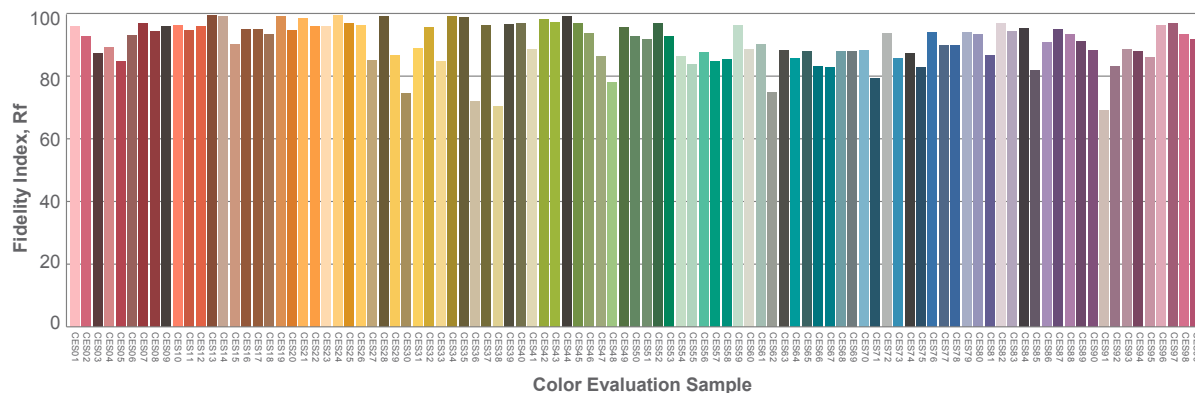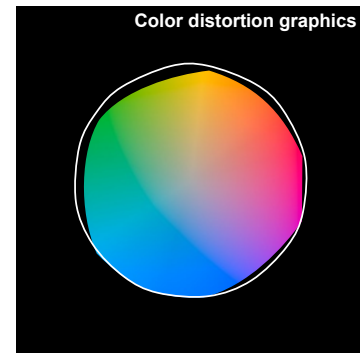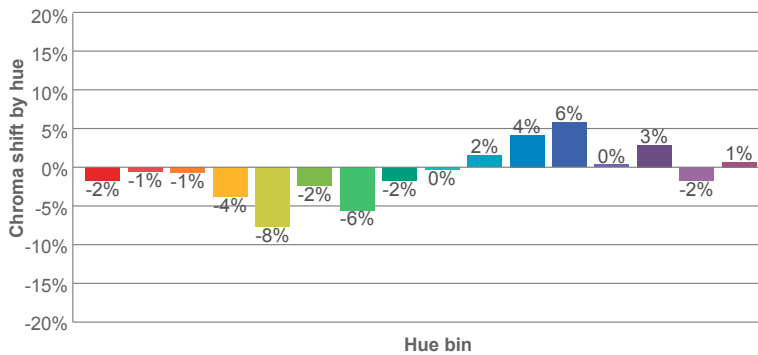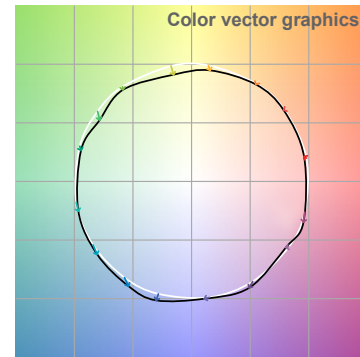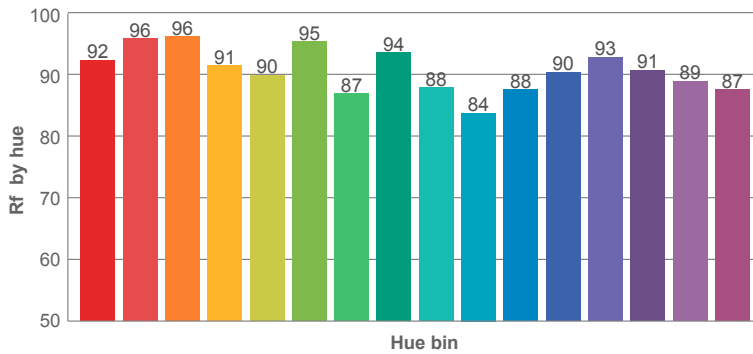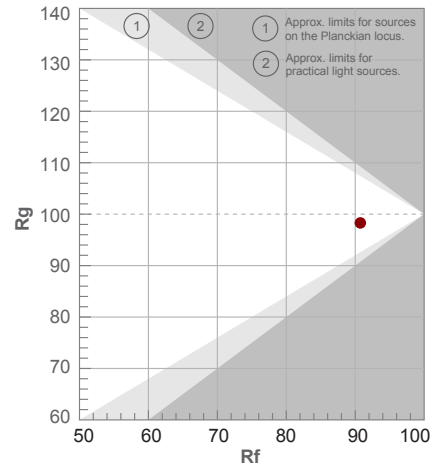

Viso Systems Aps – Copenhagen, Denmark – [www.visosystems.com](http://www.visosystems.com)

Note: specifications are representative of the diode type and not a particular tape light article.

100%

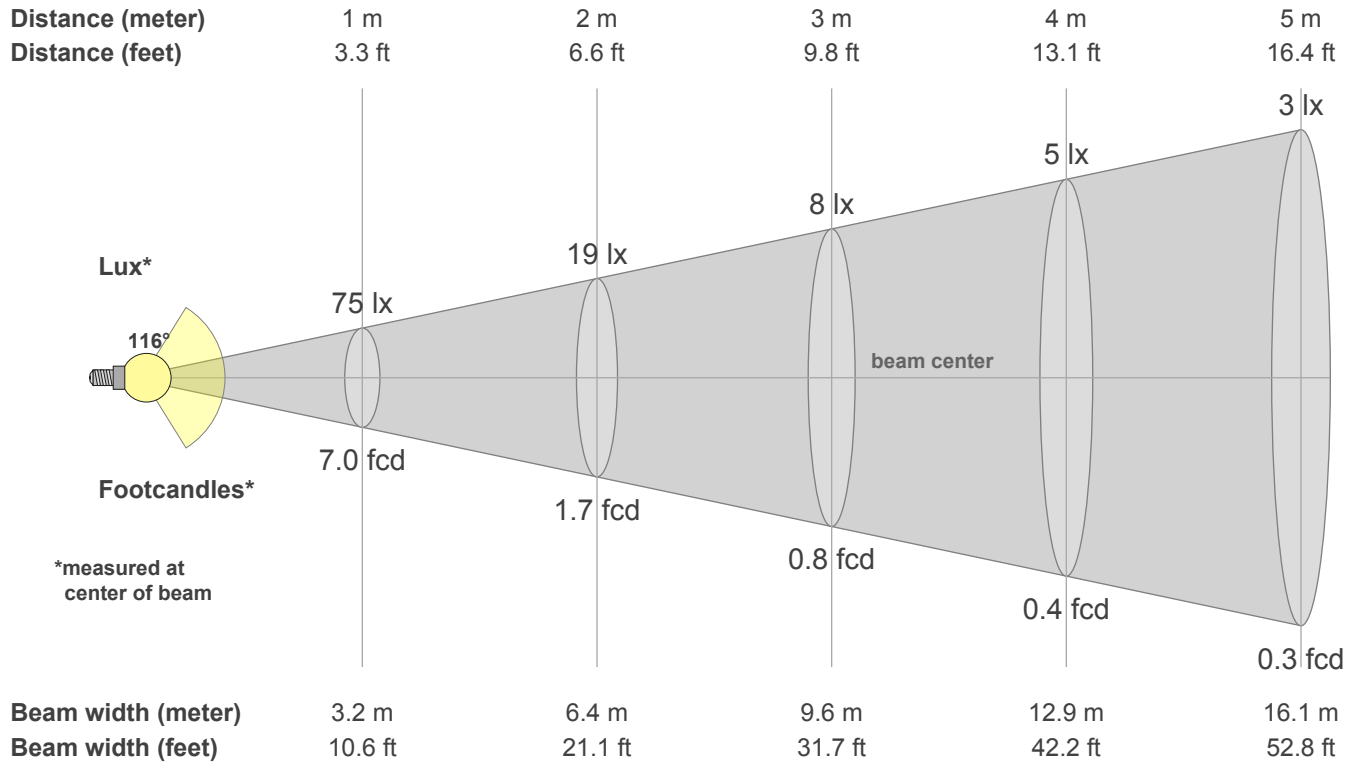

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
75.3	75.0	74.1	72.7	70.7	68.1	64.9	61.2	57.0	52.3	47.1	41.4	35.4	28.9	22.1	15.4	9.1	3.8	1.0	0.8
100%	100%	98%	97%	94%	90%	86%	81%	76%	70%	63%	55%	47%	38%	29%	20%	12%	5%	1%	1%

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
75.3	75.0	74.1	72.7	70.7	68.1	64.9	61.2	57.0	52.3	47.1	41.4	35.4	28.9	22.1	15.4	9.1	3.8	1.0	0.8
100%	100%	98%	97%	94%	90%	86%	81%	76%	70%	63%	55%	47%	38%	29%	20%	12%	5%	1%	1%

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
75.3	75.0	74.2	72.7	70.7	68.1	65.0	61.3	57.1	52.4	47.2	41.5	35.3	28.7	21.9	15.1	8.7	3.5	0.7	0.6
100%	100%	99%	97%	94%	91%	86%	81%	76%	70%	63%	55%	47%	38%	29%	20%	11%	5%	1%	1%

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
75.3	75.0	74.2	72.7	70.7	68.1	65.0	61.3	57.1	52.4	47.2	41.5	35.3	28.7	21.9	15.1	8.7	3.5	0.7	0.6
100%	100%	99%	97%	94%	91%	86%	81%	76%	70%	63%	55%	47%	38%	29%	20%	11%	5%	1%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2.5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
116.3°	162.3°	360.0°	75.4%	50.8%