

Surfa® 2 Surface Mount Channel



The Surfa 2 is ideal for general low-profile corner mounting of LED tape light so that it shines at a 45° angle from the surface. Surfa 2 corner connectors can be used to link channel section seamlessly around corners, while straight connectors can join straight sections of channel for longer runs. Surfa 2 is perfect for directional lighting.

- Thermally-balanced design for maximum cooling
- Channel covers protect LED tape light
- Diffuser covers provide smooth light diffusion with no hotspots
- Full range of accessories for a great-looking installation
- Complete kits available to create a finished fixture



PRODUCT INFORMATION




Item Number	Description
AL-50-04-0111-KIT*	4 ft. aluminum kit includes 1 channel, 1 diffuser cover, 2 pairs of plastic end caps, and 5 mounting clips and screws
AL-50-04-0111-KIT-BL*	4 ft. matte black kit includes 1 channel, 1 diffuser cover, 2 pairs of black plastic end caps, 5 mounting black clips and 5 silver screws
AL-50-04-0111-KIT-WH*	4 ft. gloss white kit includes 1 channel, 1 diffuser cover, 2 pairs of white plastic end caps, 5 mounting white clips and 5 silver screws
AL-50-04-0115-KIT*	7 ft. aluminum kit includes 1 channel, 1 diffuser cover, 4 pairs of plastic end caps, and 9 mounting clips and screws
AL-50-04-0115-KIT-BL*	7 ft. matte black kit includes 1 channel, 1 diffuser cover, 4 pairs of black plastic end caps, 10 mounting black clips and 10 silver screws
AL-50-04-0115-KIT-WH*	7 ft. gloss white kit includes 1 channel, 1 diffuser cover, 4 pairs of white plastic end caps, 10 mounting white clips and 10 silver screws
AL-50-04-0011-AL-PART	Channel - 4 ft. - aluminum finish
AL-50-04-0015-AL-PART	Channel - 7 ft. - aluminum finish
AL-50-04-9902-FRT	Diffuser cover - 4 ft.
AL-50-04-9905-FRT	Diffuser cover - 7 ft.
AL-50-04-9912-CLR	Clear cover - 4 ft.
AL-50-04-9915-CLR	Clear cover - 7 ft.
AL-50-04-9951-SL	Plastic color-matched end caps 2 pair pack: 2 open, 2 closed with screws
AL-50-04-9955-SL	Plastic color-matched end caps 10 pair pack: 10 open, 10 closed with screws
AL-50-04-9986-WH	Mounting clips/screws - 5-pack
AL-50-04-9992-SL	Straight connector - plastic
AL-50-04-9992-WHITE	Straight connector - white plastic
AL-50-04-9992-BL	Straight connector - black plastic
AL-50-04-9993-SL	Corner connector - plastic
AL-50-04-9993-WHITE	Corner connector - white plastic
AL-50-04-9993-BL	Corner connector - black plastic

*Add -25 or -50 to the end of item number for discounted bundles.



This channel is compatible with selected tape light models only, see the "Channel and Tape Light Compatibility and Hotspot Guide" PDF on the Resources page on our website for information.

ALLOY LED® Specifications

DIMENSIONS




Note: Diagram not actual size



1 mounting clip is recommended every 2 ft.
Easily snap lens into mounted channel

COMPLETE SOLUTION

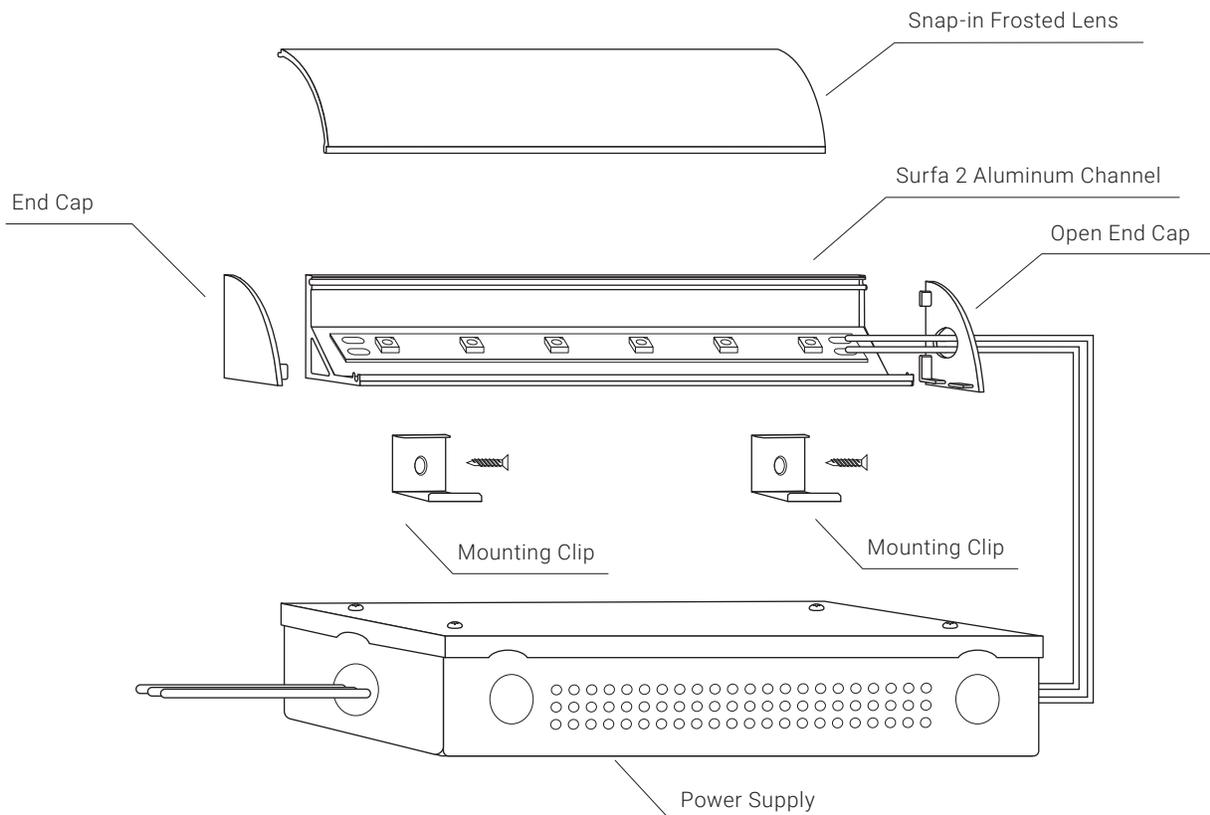


SURFA 2 AND TAPE LIGHT HOTSPOT AND COMPATIBILITY GUIDE

Tape Light	Wire Connector	AmpChamp	Hotspot
PrimaLine® 1.5	S	Y	2
PrimaLine 1.5 XT	S		2
PrimaLine 2.5 COB		Y	0
PrimaLine 2.7 LP	S		0
PrimaLine 3	S	Y	2
PrimaLine 3 XT	S		2
PrimaLine 4.4 Gen 2	S		2
PrimaLine 4.4 XT Gen 2	S		2
PrimaLine 5.5 LP	S		0
PrimaLine 6.6 Gen 2			N/A
PrimaLine 7	S		1
PrimaLine 8 Gen 2			N/A
Varien™ 5.5 Dim-to-Warm			N/A
Radialux® 2.2 RGB	S		5
Radialux 4.2 COB RGB			0
Radialux 4.4 RGB	S		3
Radialux 4.4 RGBW			N/A
Radialux 4.7 LP RGBW	S		2
Radialux 5.9 RGBW			N/A
Radialux 8.8 RGB			N/A
PrimaLine 1.5 Wet	Y		3
PrimaLine 1.5 XT Wet			N/A
PrimaLine 3 Wet	Y		2
PrimaLine 3 XT Wet			N/A
PrimaLine 4.4 XT Gen 2 Wet	Y*		1
Radialux 2.2 RGB Wet			N/A
Radialux 4.4 RGB Wet			N/A
Radialux 4.4 RGBW Wet			N/A
Radialux 5.9 RGBW Wet			N/A


Chart Key

- Y** Tape, channel, and connector fit
- Y (x/z)** x = # of rows of tape that fit in channel / z = # of lead wires that fit in end caps
- Y*** (Wet Tape Only) Tape light end caps do not fit
- S** (Dry Tape Only) Connector does not fit in channel / leads should be soldered
- Does not fit width and /or height

Hotspot Values

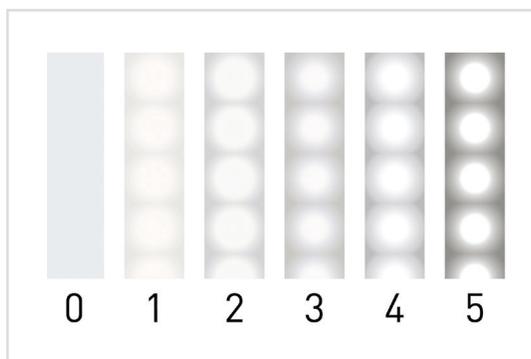


Compatibility Visual Key

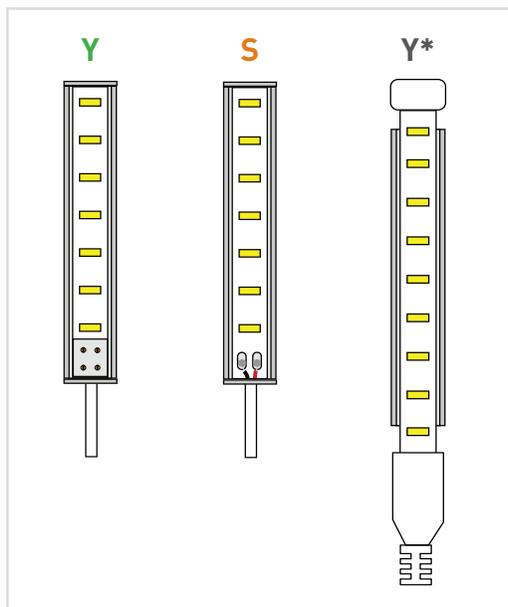


CONNECTING CHANNELS

Link 2 channels together by inserting 2 channels into a single straight connector.

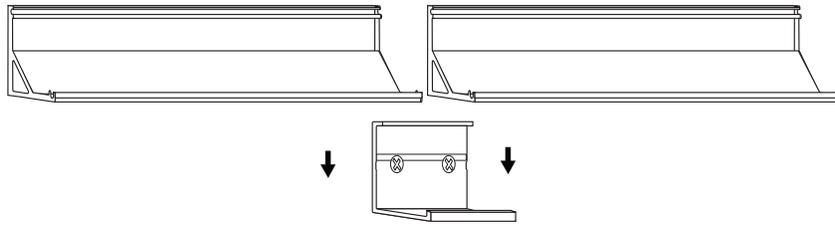

For a 90° corner, slide a channel into each end of the corner connector.

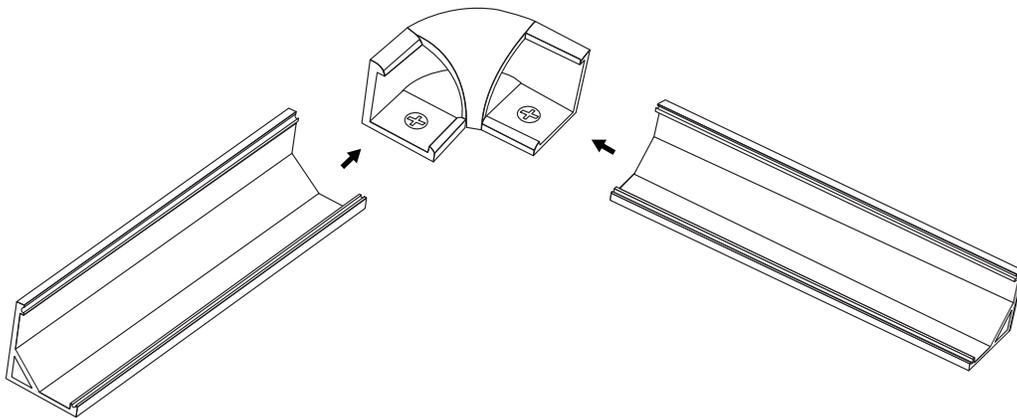

ALLOY LED® Specifications

RECOMMENDED TAPE LIGHT (SOLD SEPARATELY)

Low Output

PrimaLine 1.5 LED Tape Light



12V DC / Maximum Run = 16.4 ft.					
16.4 ft. Spool	50 ft. Spool	100 ft. Spool	Color Temperature	Lumens per Foot	CRI
AL-01-01-1201	AL-01-01-1221	AL-01-01-1241	● 2700K	104	98
AL-01-01-1202	AL-01-01-1222	AL-01-01-1242	● 3000K	109	98
AL-01-01-1203	AL-01-01-1223	AL-01-01-1243	○ 4200K	119	97
AL-01-01-1204	AL-01-01-1224	AL-01-01-1244	● 5000K	121	96

24V DC / Maximum Run = 20 ft.					
16.4 ft. Spool	50 ft. Spool	100 ft. Spool	Color Temperature	Lumens per Foot	CRI
AL-01-01-2400	AL-01-01-2420	AL-01-01-2440	● 2200K	87	95
AL-01-01-2401	AL-01-01-2421	AL-01-01-2441	● 2700K	104	98
AL-01-01-2402	AL-01-01-2422	AL-01-01-2442	● 3000K	109	98
AL-01-01-2403	AL-01-01-2423	AL-01-01-2443	○ 4200K	119	97
AL-01-01-2404	AL-01-01-2424	AL-01-01-2444	● 5000K	121	96
AL-01-01-2405	AL-01-01-2425	AL-01-01-2445	● 2400K	92	96

Medium Output

PrimaLine 3 LED Tape Light



12V DC / Maximum Run = 16.4 ft.					
16.4 ft. Spool	50 ft. Spool	100 ft. Spool	Color Temperature	Lumens per Foot	CRI
AL-01-02-1201	AL-01-02-1221	AL-01-02-1241	● 2700K	207	98
AL-01-02-1202	AL-01-02-1222	AL-01-02-1242	● 3000K	234	98
AL-01-02-1203	AL-01-02-1223	AL-01-02-1243	○ 4200K	240	97
AL-01-02-1204	AL-01-02-1224	AL-01-02-1244	● 5000K	244	96


24V DC / Maximum Run = 20 ft.					
16.4 ft. Spool	50 ft. Spool	100 ft. Spool	Color Temperature	Lumens per Foot	CRI
AL-01-02-2400	AL-01-02-2420	AL-01-02-2440	● 2200K	170	95
AL-01-02-2401	AL-01-02-2421	AL-01-02-2441	● 2700K	207	98
AL-01-02-2402	AL-01-02-2422	AL-01-02-2442	● 3000K	234	98
AL-01-02-2403	AL-01-02-2423	AL-01-02-2443	○ 4200K	240	97
AL-01-02-2404	AL-01-02-2424	AL-01-02-2444	● 5000K	244	96
AL-01-02-2405	AL-01-02-2425	AL-01-02-2445	● 2400K	178	96

ALLOY LED® Specifications


RECOMMENDED POWER SUPPLIES (SOLD SEPARATELY)



Alloy LED PowerFactor™ Dimmable Power Supplies with Integrated UL Listed Junction Box
Compact, highly efficient, and code-compliant power supply with versatile and smooth dimming capabilities.

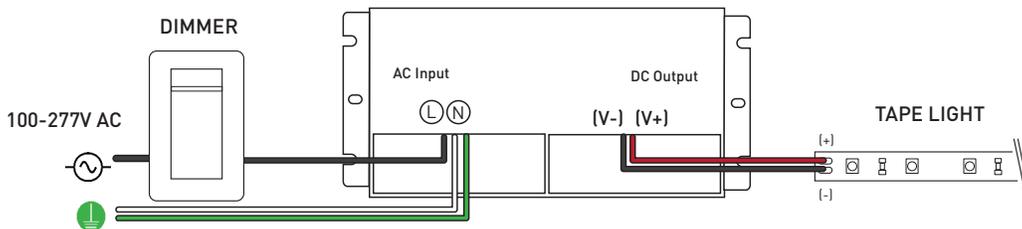

Wiring diagram is for reference ONLY. Please refer to dimmer wiring specifications sheet for accurate directions.



Single Tap Models

Item Number	Output Voltage	Wattage	Wet Location	Minimum Load	Dimensions (L x W x H)	Class 2
AL-98-10-12030	12V DC	30W	Yes (NEMA 4X)	10%	6.50 x 3.72 x 1.02 in.	Yes
AL-98-10-12060	12V DC	60W	Yes (NEMA 4X)	10%	7.40 x 3.72 x 1.02 in.	Yes
AL-98-10-12120	12V DC	120W	Yes (NEMA 4X)	10%	8.66 x 3.72 x 1.57 in.	No
AL-98-10-24030	24V DC	30W	Yes (NEMA 4X)	10%	6.50 x 3.72 x 1.02 in.	Yes
AL-98-10-24060	24V DC	60W	Yes (NEMA 4X)	10%	7.40 x 3.72 x 1.02 in.	Yes
AL-98-10-24096	24V DC	96W	Yes (NEMA 4X)	10%	8.66 x 3.72 x 1.57 in.	Yes
AL-98-10-24150	24V DC	150W	Yes (NEMA 4X)	10%	10.24 x 4.13 x 1.77 in.	No
AL-98-10-24200	24V DC	200W	Yes (NEMA 4X)	10%	10.24 x 4.13 x 1.77 in.	No
AL-98-10-24300	24V DC	300W	Yes (NEMA 4X)	10%	10.94 x 4.33 x 1.77 in.	No

Class 2 Compliant Multi-Tap Models

Item Number	Output Voltage	Wattage	Wet Location	Minimum Load	Dimensions (L x W x H)	Class 2
AL-98-10-12300-MT	12V DC	300W	Yes (NEMA 4X)	10%	11.85 x 4.33 x 1.77 in.	Yes
AL-98-10-24192-MT	24V DC	192W	Yes (NEMA 4X)	10%	10.94 x 4.33 x 1.77 in.	Yes
AL-98-10-24288-MT	24V DC	288W	Yes (NEMA 4X)	10%	10.85 x 4.33 x 1.77 in.	Yes

Note: PowerFactor assumes 80% load.
Inspectors prefer power supply to be used with junction box.
For dimmer compatibility, refer to drivers specification sheet.

ALLOY LED® Specifications

RECOMMENDED POWER SUPPLIES (SOLD SEPARATELY)

Alloy LED's Silver Recommendation


Alloy LED Primavolt® No Minimum Load Dimmable Power Supplies with ETL Listed Junction Box Code-compliant power supply with versatile and smooth dimming capabilities. Compatible with ELV, MLV, and TRIAC dimmers.



Dry Location Model
White model for 60W and lower



Wet Location Model
Black model for 80W and higher

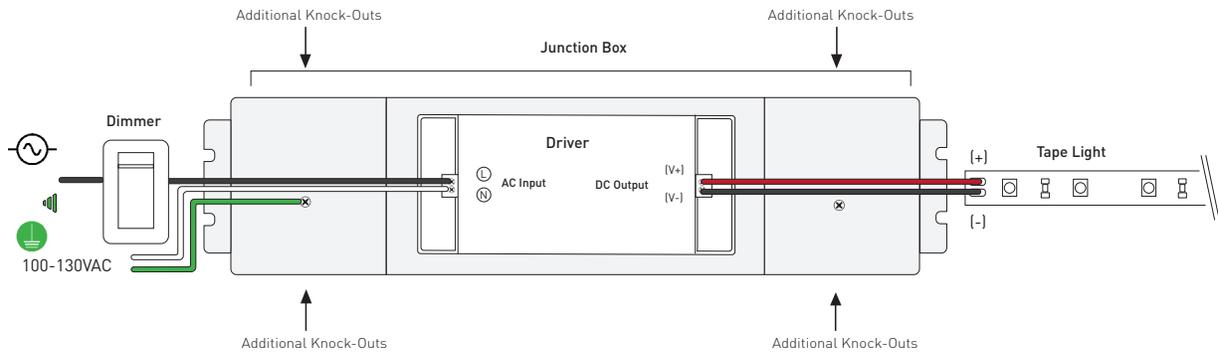

Wiring diagram is for reference ONLY. Please refer to dimmer wiring specifications sheet for accurate directions.



Item Number	Output Voltage	Wattage	Minimum Load	Dimensions (Junction box) (L x W x H)	Class 2
AL-98-03-12024-NM	12V DC	24W	0%	13.75 x 3.0 x 1.50 in.	Yes
AL-98-03-12048-NM	12V DC	48W	0%	13.75 x 3.0 x 1.50 in.	Yes
AL-98-03-12060-NM	12V DC	60W	0%	13.75 x 3.0 x 2.25 in.	Yes
AL-98-03-12080-NM	12V DC	80W	0%	15.0 x 3.0 x 2.25 in.	No
AL-98-03-12120-NM	12V DC	120W	0%	15.0 x 3.0 x 2.25 in.	No
AL-98-03-24024-NM	24V DC	24W	0%	13.75 x 3.0 x 1.50 in.	Yes
AL-98-03-24048-NM	24V DC	48W	0%	13.75 x 3.0 x 1.50 in.	Yes
AL-98-03-24060-NM	24V DC	60W	0%	13.75 x 3.0 x 2.25 in.	Yes
AL-98-03-24080-NM	24V DC	80W	0%	15.0 x 3.0 x 2.25 in.	Yes
AL-98-03-24096-NM	24V DC	96W	0%	15.0 x 3.0 x 2.25 in.	Yes
AL-98-03-24150-NM	24V DC	150W	0%	16.25 x 3.50 x 2.25 in.	No
AL-98-03-24200-NM	24V DC	200W	0%	16.25 x 3.50 x 2.25 in.	No

Note: Alloy LED strongly recommends using Listed Class 2 power supplies for all installations. Always install in accordance with local and national electrical code regulations. Inspectors prefer power supply to be used with junction box. For dimmer compatibility, refer to drivers specification sheet.

ALLOY LED® Specifications

DIMMING ACCESSORIES (SOLD SEPARATELY)

Lutron® Dimming Accessories

By participating in Lutron's OEM Advantage program, Alloy LED is able to offer a range of the highest quality low voltage power supplies and selected controls on the market.



Hi-lume Premier
0.1% EcoSystem /
3-wire LED Driver
(96W 24VDC)



Hi-lume 1% LED Driver 40W
- EcoSystem / 3-wire control
- 2-wire 120V forward
phase control



Lutron Vive PowPak RF Module
- RF module for EcoSystem LED
driver control
- Use with the Lutron EcoSystem
drivers shown to "Vive-enable"
Alloy LED products

Lutron® Hi-lume LED Drivers

Item Number	Output	Wattage	Minimum Load	Class 2
AL-98-07-12040	12V DC	40W	N/A	Yes
AL-98-07-12040-3WIRE	12V DC	40W	N/A	Yes
AL-98-07-24040	24V DC	40W	N/A	Yes
AL-98-07-24040-3WIRE	24V DC	40W	N/A	Yes
AL-98-07-24096-3WIRE	24V DC	96W	N/A	Yes

Lutron® Controls

Item Number	Description	Voltage
AL-98-07-9901	EcoSystem Control Module	N/A
AL-98-07-9901-8	EcoSystem Control Module - 8 pack	N/A
AL-98-07-9950	CL Dimmer	120V AC
AL-98-07-9950-FPLATE	CL Dimmer faceplate	N/A


DIMMING ACCESSORIES (SOLD SEPARATELY)

Dimmers and Switches

SlimDim Wireless Dimmers

Using long-range RF technology, these LED dimmers connect wirelessly to a receiver, offering freedom to mount anywhere. Can also be used as a fob for mobile, hand-held control.


AL-70-01-0001	SlimDim Wireless Dimmer
AL-70-01-0002	Single Color Receiver (96W maximum) (Sold separately)
AL-98-07-9950-FPLATE	SlimDim Wall Plate (Sold separately)

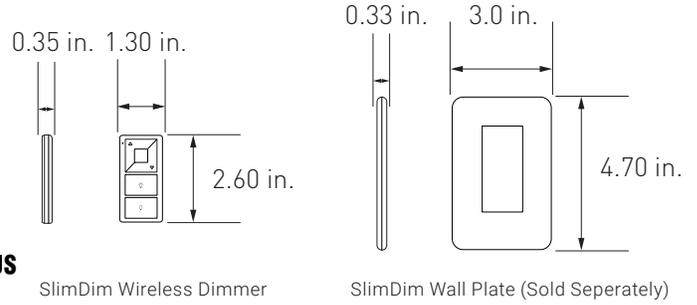

Remote Control Dimmer Switch

Provides full dimming and on/off control, and includes a touch wheel that allows for direct visual selection of brightness. It can also operate up to four independent zones.


AL-60-03-0001	Remote Control Dimmer Switch
AL-70-01-0002	Single Channel Receiver (Sold separately)
AL-60-03-0004-V2	Wireless Receiver (RGB and RGBW) (Sold separately)

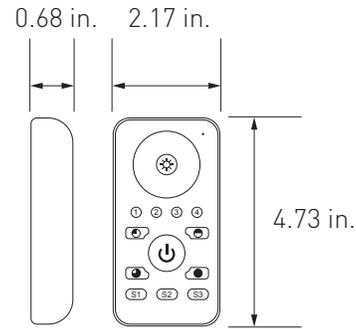

Single Channel Wireless Receiver

Pair with the Remote Control Dimmer Switch or the SlimDim Wireless Dimmer to dim PrimaLine tape lights. Use one remote to make independent lighting zones with multiple receivers with certain controllers.

AL-70-01-0002	Single Channel Wireless Receiver
---------------	----------------------------------

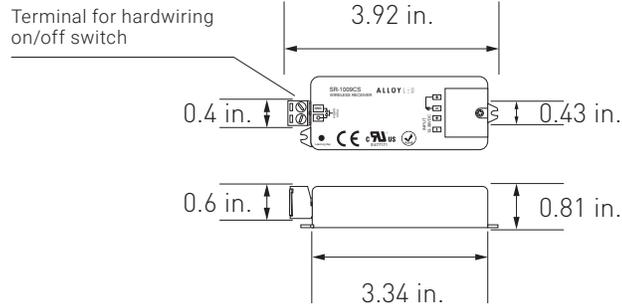

WIRING DIAGRAM

