

**DESCRIPTION**

The LE-C3 adapter provides 12VDC output to DC sensors and controller, enabling them to work together with luminaires that don't provide AUX DC supply. The LE-C3 also provides 0-10V dimming wires for bi-level motion control and relay output.

**FEATURES & BENEFITS**

- Includes high-efficiency switching power supply and 10A relay
- Switches connected loads on and off in response to LiteLogic low-voltage sensors
- Supplies 12VDC, 200mA power to the sensor
- Ideal for applications that require high-voltage switching through low-voltage controls
- Threaded connection attaches to enclosures through standard 1/2" knockouts

**SPECIFICATIONS**

**Electrical:**

- Input Voltage: 120-277VAC
- Frequency: 60Hz
- Current: 10A max
- Max Load: 120-277VAC, 10A E.Ballast, LED, CFL
- AUX Voltage: 12VDC, 200mA
- Dimming: Class 2, 0-10VDC, 10mA max
- Sinking Current: 10mA max
- Dim To Off: 5%/0.5V

**Construction:**

- Housing: UL 94-5VA
- IP Rating: IP20, Indoor Use Only
- Finish: White
- Operating Temperature: -30°C to 65°C (-22°F to 149°F), case temperature when installed in a fixture
- Storage Temperature: -30°C to 85°C (-22°F to 185°F)

**Testing & Compliance:**

- cULus Listed, complies to UL 8750, RohS
- cULus Listed LED Controller

**Warranty:**

- Five year warranty (terms and conditions apply)

Model: \_\_\_\_\_ Date: \_\_\_\_\_  
 Accessories: \_\_\_\_\_  
 Job Name: \_\_\_\_\_ Type: \_\_\_\_\_



Suitable for Use with LiteLogic Sensors



Get it from the **App Store**


Get it from **Google Play**



**ORDERING INFORMATION** (Example: LE-C3)

Model	Description
LE-C3	Fixture Controller, 120-277VAC, 60Hz, 10A Max

**Dimensions**

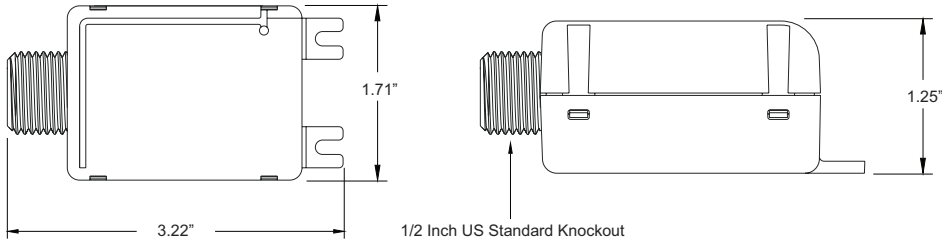

**Wiring Diagram**

