

PIR Motion Sensor Switch - with Remote Sensor

AL-97-99-9958



Our PIR Motion Sensor Switch with Remote Sensor easily turns lights on automatically when motion is detected. Ideal for kitchens, basements, corridors, and garages in both residential and commercial applications. Automatically turns On/Off light when a person's movement is present/absent in the detection area.




TECHNICAL INFORMATION

- Input from Driver: 12-24VDC Constant Voltage
- Output to Load: 12-24VDC Constant Voltage
- Max Load: 8 amps
- Detection Angle: 60 degrees
- Delay Time: ~1 minute
- Detection Range: 9.5 ft
- Humidity: Less than 93% relative humidity, non condensing.
- Ambient Operating Working Temperature: -20°C~+40°C
- IP Rating: IP20
- Output Power: 12V: <96W, 24V: <192 W


PRODUCT INFORMATION

Item Number	Input Voltage
AL-97-99-9958	12-24V DC

WIRING DIAGRAM

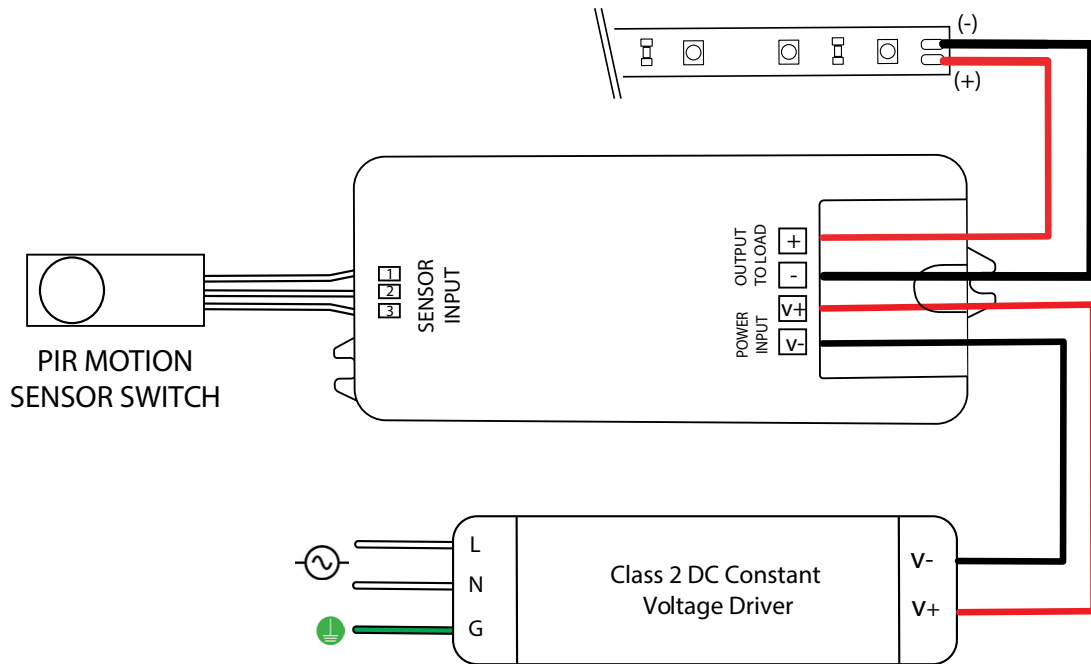

DIMENSIONS

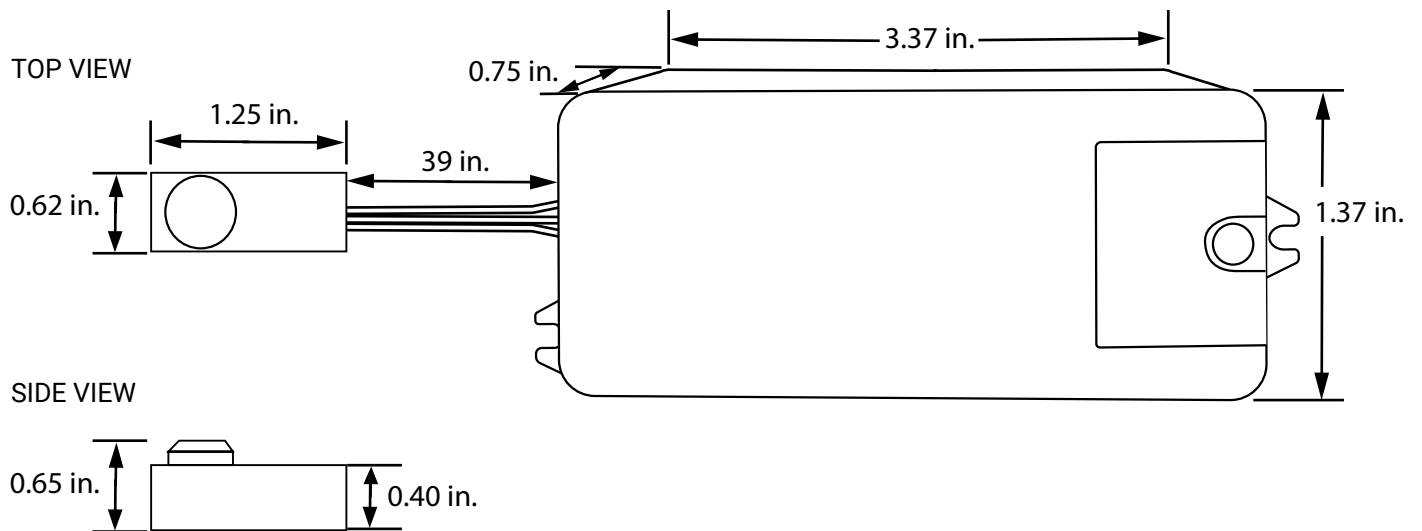

Drilling Hole - 3/8 in. (10mm)