


LED ARCHITECTURAL LINKABLE LINEAR - RECESSED TRIMLESS MOUNTING KIT LR42655, LR42656, LR42657, LR42658

IMPORTANT SAFETY INSTRUCTIONS


1. Read these instructions carefully before installation.
2. Installation should be in accordance with the national and local electrical laws and regulations.
3. Product should be installed by a qualified and licensed electrician.
4. DO NOT install in humid places, for dry and non-humid environments only.

5. Always turn off the power supply before installation or maintenance.
6. To reduce the risk of fire and overheating, make sure all connections are tight and secure.
7. Fixtures should not be covered with thermal insulation pads or similar materials under any circumstance.
8. DO NOT use outdoors.

BOX CONTENTS

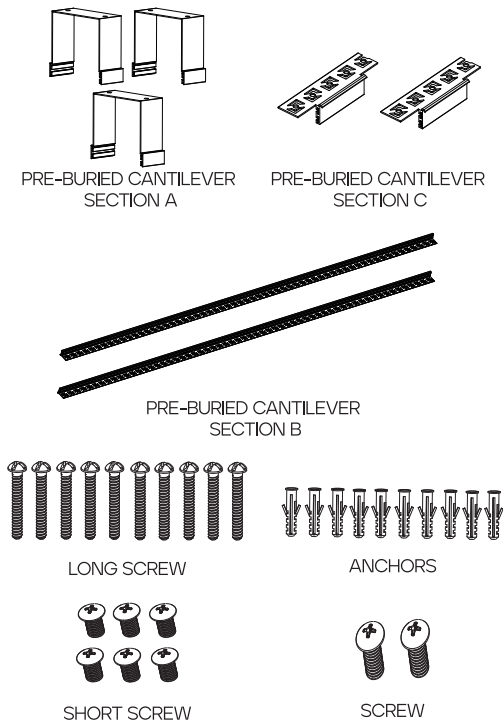


CAUTION BEFORE INSTALLATION

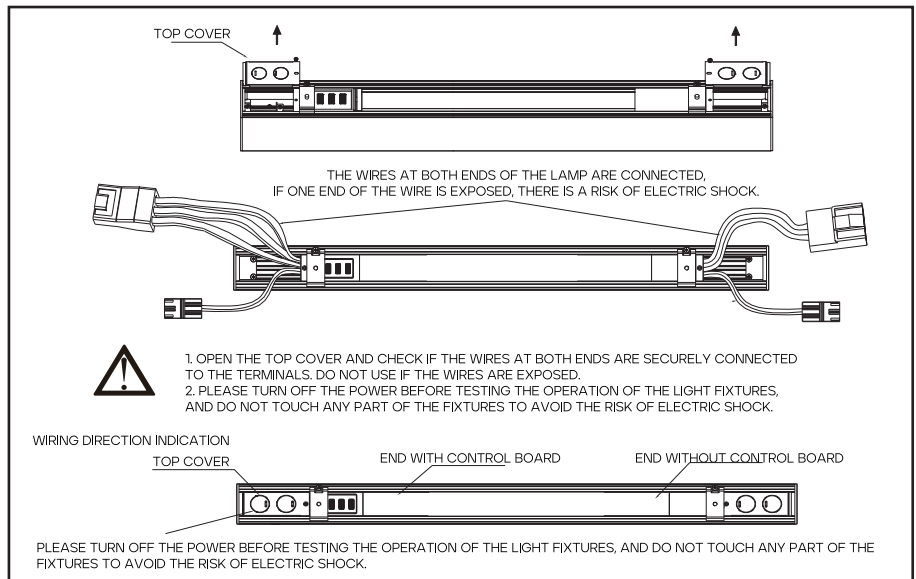


INSTRUCTIONS


1. Reserve installation holes in the ceiling.

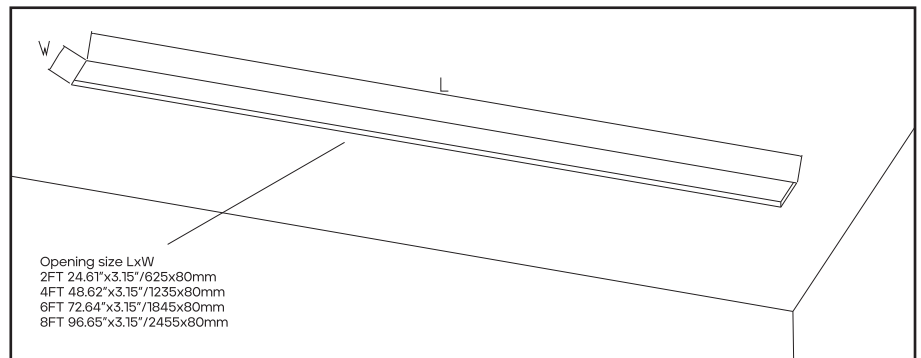

2. Fix the pre-buried lace on the light body

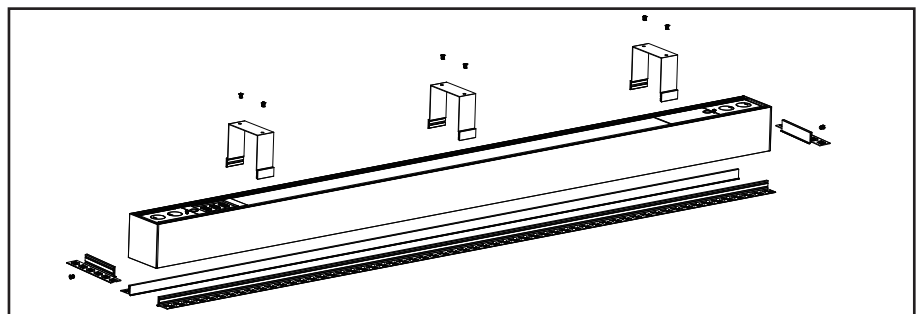


WIRING

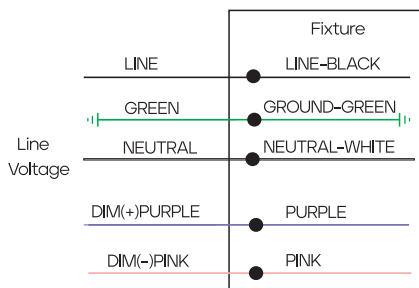


1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation


3. Put and press the fixture onto mounting surface, then mark the mounting positions from brackets, for step 5.

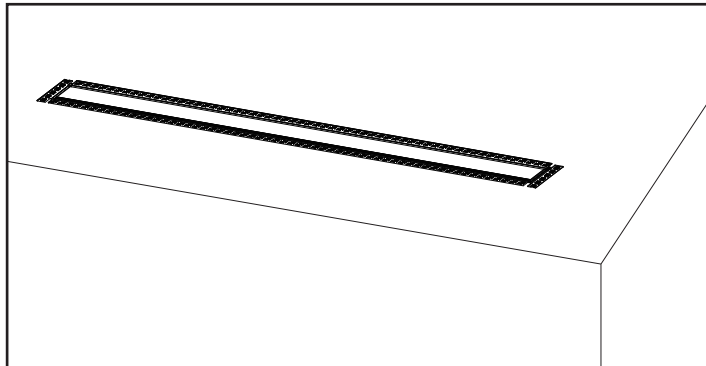

4. Drill the holes according to the marks and insert the anchors

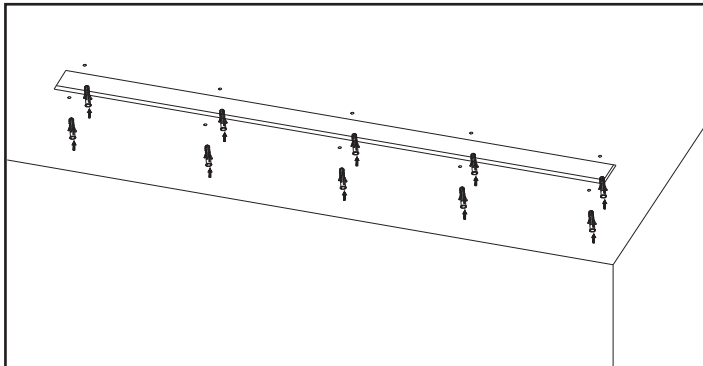


5. Cut off the fixture's connectors for wiring to line voltage if needed, make wiring according to the wiring diagram in the left.

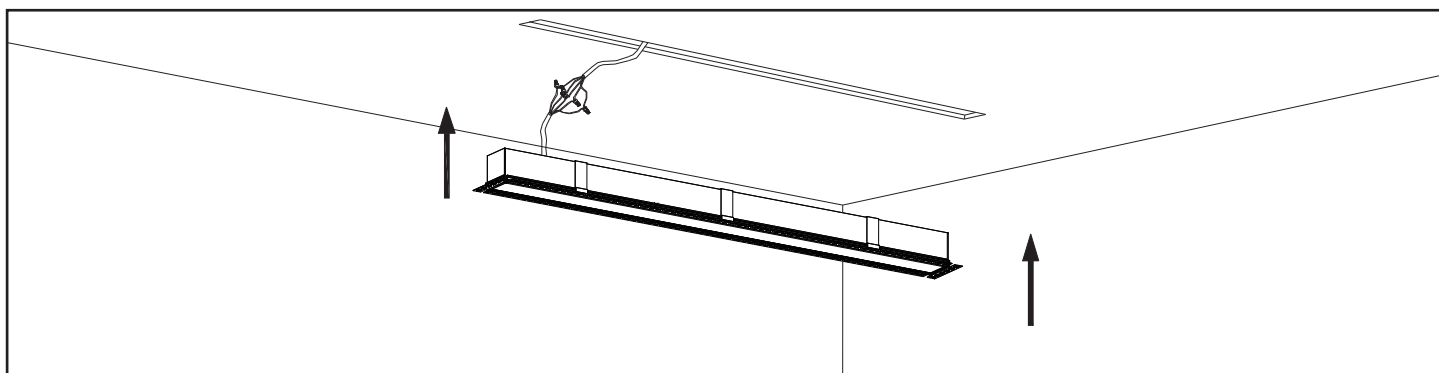

WIRING


Line Voltage		Fixture	
LINE		●	LINE-BLACK
GREEN		●	GROUND-GREEN
NEUTRAL		●	NEUTRAL-WHITE
DIM(+)-PURPLE		●	PURPLE
DIM(-)-PINK		●	PINK

6. Secure the fixture to the mounting surface with long screws


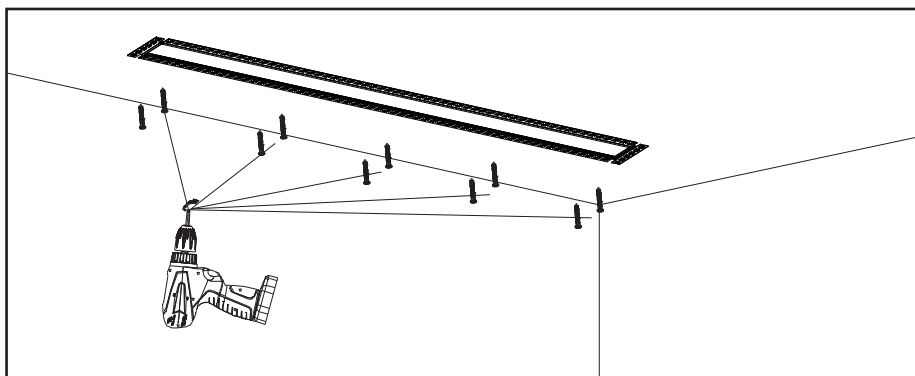


1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation.

7. Brush coating covers embedded extension

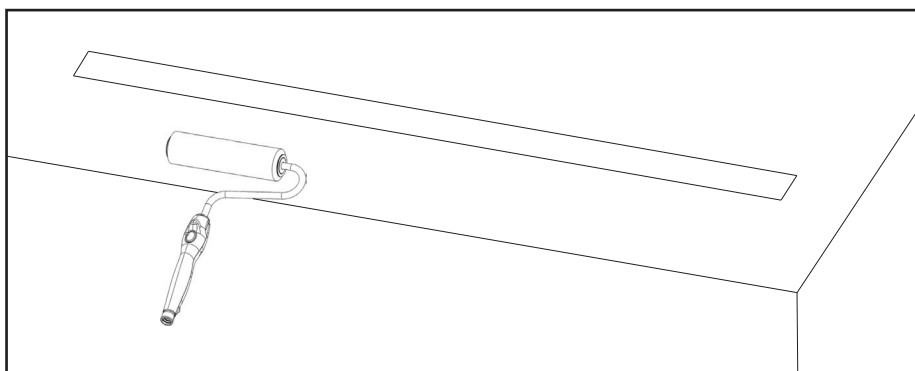

WIRING

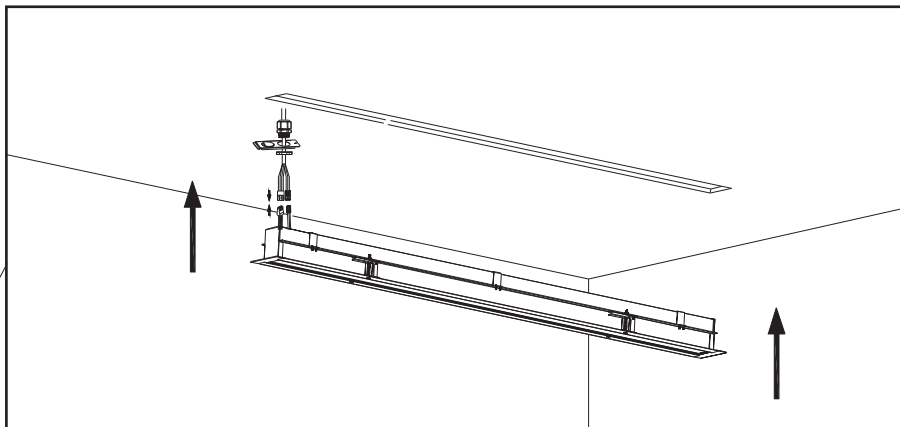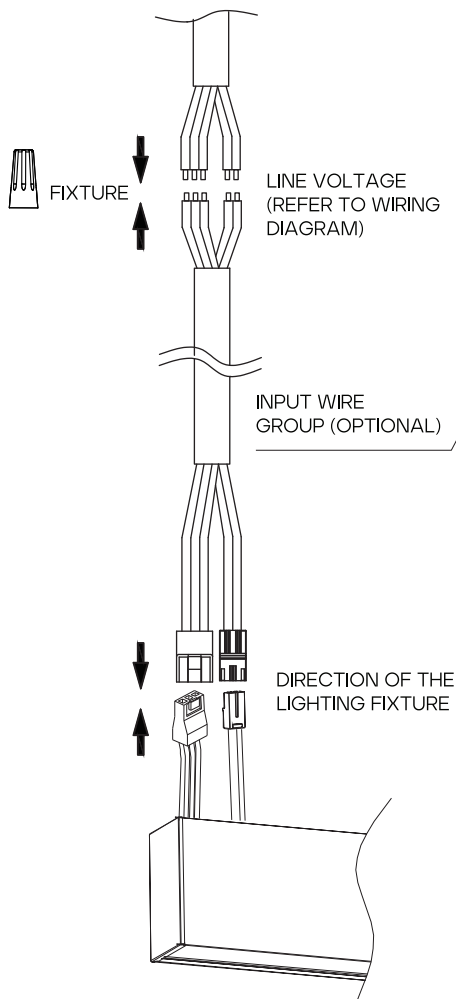

DRIVER WIRE PACKAGE


*SOLD SEPARATELY



WIRE NUTS




TIES




WIRE

THREE TERMINALS: NEUTRAL WIRE, LIVE WIRE, GROUND WIRE.
TWO TERMINAL: DIM+ (PURPLE), DIM- (PINK)

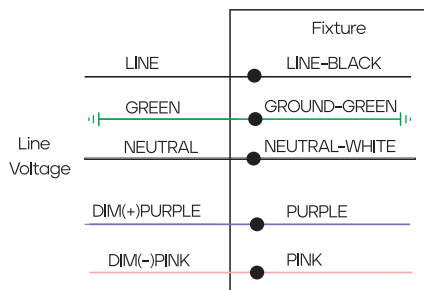


1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation.


DIMENSIONS

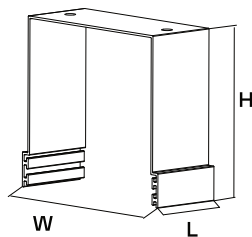

Pre-buried Cantilever Section A

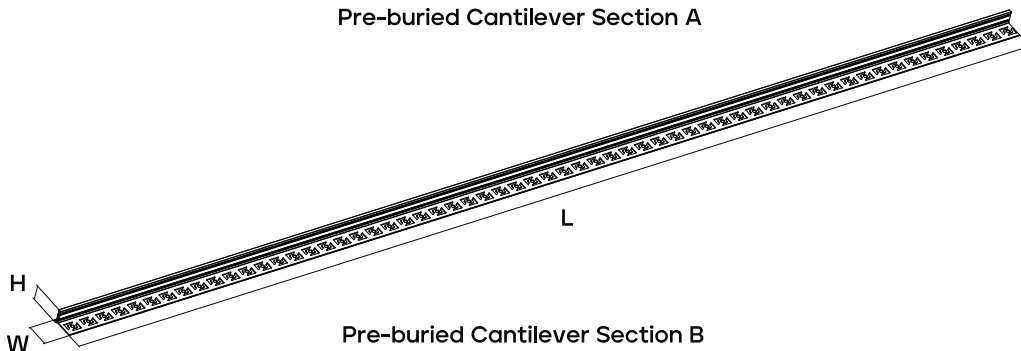

Pre-buried Cantilever Section B



Pre-buried Cantilever Section C

Size	PRE-BURIED CANTILEVER SECTION B	
	L*W*H(in/mm)	Usage(PCS)
2FT	23.7*1.0*0.7/601*25.7*17.9	2
4FT	47.7*1.0*0.7/1212*25.7*17.9	2
6FT	35.8*1.0*0.7/910*25.7*17.9	4
8FT	47.7*1.0*0.7/1212*25.7*17.9	4

PRE-BURIED CANTILEVER SECTION A	
L*W*H(in/mm)	Usage(PCS)
1.2*2.3*2.9/30*59.6*74.5	2
1.2*2.3*2.9/30*59.6*74.5	3
1.2*2.3*2.9/30*59.6*74.5	6
1.2*2.3*2.9/30*59.6*74.5	6

PRE-BURIED CANTILEVER SECTION C	
L*W*H(in/mm)	Usage(PCS)
3.5*1.0*0.7/90*25.7*17.9	2
3.5*1.0*0.7/90*25.7*17.9	2
3.5*1.0*0.7/90*25.7*17.9	2
3.5*1.0*0.7/90*25.7*17.9	2