



# LED OUTDOOR WALL SCONCE WITH RGBW

## LWS27C-SMART-RGBW series

► **DESIGN** - LED OUTDOOR WALL SCONCE WITH RGBW has a modern, multipurpose design and a stylish look with efficient lighting. Durable housing resistant to rust and impact provides many years of service. The acrylic lens with a 350° beam angle grants you even light distribution. It is designed to operate on 120-277V circuits and provides smooth triac dimming capabilities ranging from 10% to 100%.

► **RGBW** - The fixture has RGBW design with APP control. You can easily select Red, Green, Blue, White (2700K-6500K) colors or its' combinations, having 16.7 million colors in total. You can also choose lighting patterns and set up a schedule, having a great variety of good looking effects. All of it is easily controlled by Smart APP on your Smartphone. The fixture is also compatible with Alexa, Google Assistant and Siri.

► **INSTALLATION** - Quick and easy installation, the fixture can be installed on standard 2.75" or 3.5" outlet box. The additional mounting holes provide secure installation options.

► **APPLICATION** - The fixture is rated for Wet Locations, making it perfect for indoor and outdoor projects such as decks, front doors, porches, patios, corridors, walkways, or any other common areas.

► **ADVANTAGES** - With a lifespan of 50,000 hours, these fixtures are made to last decades under normal operation! ASD provides a 5-year limited warranty along with ETL certification to guarantee top quality products and safety!



## PRODUCT PRESENTATION:


| Model                      | Power | Voltage   | Dimming   | Lumens   | CCT                          | Finish | Dimensions            | Certification |
|----------------------------|-------|-----------|-----------|----------|------------------------------|--------|-----------------------|---------------|
| ASD-LWS27C-18D20SM-RGBW-BK | 20W   | 120-277 V | SMART APP | 947 lm   | Red-Green-Blue-2,700-6,500 K | Black  | 18" x 5-7/8" x 1-7/8" | ETL (4001256) |
| ASD-LWS27C-24D24SM-RGBW-BK | 24W   | 120-277 V | SMART APP | 1,096 lm | Red-Green-Blue-2,700-6,500 K | Black  | 24" x 5-7/8" x 1-7/8" | ETL (4001256) |

## TECHNICAL PARAMETERS:

| Model                      | Max input current | Inrush current | Work environment | Operating temperature         | Power factor | Surge protection | Housing | Lens    | CRI |
|----------------------------|-------------------|----------------|------------------|-------------------------------|--------------|------------------|---------|---------|-----|
| ASD-LWS27C-18D20SM-RGBW-BK | 0.65A             | 0.17A          | Wet location     | -40°F to 113°F(-40°C to 45°C) | >0.9         | 2.5kV            | Steel   | Acrylic | >80 |
| ASD-LWS27C-24D24SM-RGBW-BK | 0.65A             | 0.20A          | Wet location     | -40°F to 113°F(-40°C to 45°C) | >0.9         | 2.5kV            | Steel   | Acrylic | >80 |

## PACKAGE CONTENTS:

| Description             | Quantity |
|-------------------------|----------|
| LED Outdoor Wall Sconce | 1        |
| Mounting plate (A)      | 1        |
| Mounting screw (B)      | 2        |
| Self-tapping screw (C)  | 2        |
| Fixture screw (D)       | 4        |
| Wire nut (E)            | 3        |
| Waterproof gasket (F)   | 4        |
| Anchor (G)              | 2        |
| Box                     | 1        |



For most up-to-date spec sheets please refer to [asd-lighting.com](http://asd-lighting.com)

**ASD LIGHTING CORP**

E-mail: [orders@asd-lighting.com](mailto:orders@asd-lighting.com) | Web site: [www.asd-lighting.com](http://www.asd-lighting.com)





# LED OUTDOOR WALL SCONCE WITH RGBW

## LWS27C-SMART-RGBW series

## INSTALLATION GUIDE

### IMPORTANT SAFETY INFORMATION:

Please read all the instructions below before installation.

- ▶ Make sure that the supply voltage corresponds to the rated product voltage.
- ▶ The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- ▶ If the product is damaged, do not use it.

### ⚠ WARNING

**RISK OF PERSONAL INJURY – READ and follow all WARNINGS and installation instructions.** Keep or give to the owner for future reference.

**Risk of cuts:** Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.


**Risk of electric shock:** This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

**Risk of Fire:** Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

ASD® assumes no responsibility for claims arising out of improper or careless installation or handling of this product.

### INSTALLATION STEPS:

1. Unscrew the four fixture screws from both sides and remove the mounting plate. The fixture can be installed on standard 2.75" or 3.5" outlet box. Attach the mounting plate to the outlet box and mark the location of the holes, drill two holes for anchors, insert anchors into the holes, twist the two self-tapping screws. Attach the mounting plate to the outlet box using two mounting screws and tighten self-tapping screws.
2. Connect the wires: Black to Black, White to White, Ground to Ground. Secure the connection with wire nuts. Choose preferred color temperature by adjusting the switch position. Put the waterproof gasket on each fixture screw. Place the wall sconce on the mounting plate and secure it using four fixture screws.
3. For outdoor locations please use silicone (not included) shown in the picture below.

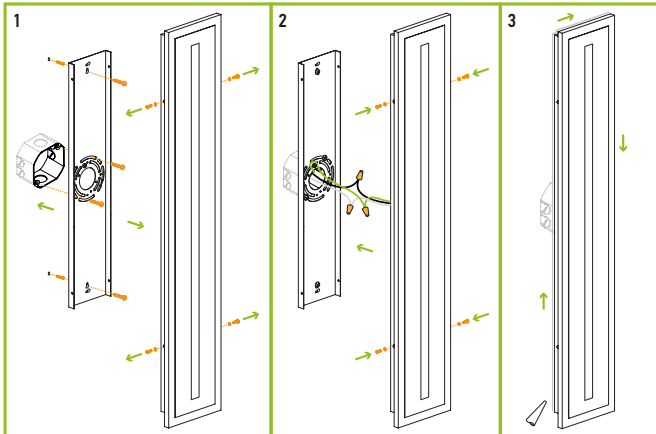

### STEP-BY-STEP GUIDE FOR ADDING NEW DEVICES TO THE ASD SMART APP:

1. Download the ASD SMART APP from the App Store (for iOS) or from the Google Play Store (for Android) using the QR codes below.

[ASD SMART APP download Android](#)

[ASD SMART APP download iOS](#)



2. Connect the fixture to a power source, then prepare the fixture for pairing:
  - If the fixture is blinking: It's already in pairing mode. Skip to Step 4.
  - If the fixture is not blinking: Go to Step 3 to manually enter pairing mode.
3. Manually put the fixture in pairing mode:
  - Turn the fixture on and off 5 times. The interval between turning on and off should be at least one second.
  - The fixture will start blinking, signaling it's in pairing mode. The blinking might stop after a few seconds, but it will still be in pairing mode.
4. Adding the fixture to the App:
  - Ensure Bluetooth is enabled and your phone is connected to a Wi-Fi network with internet access.
  - Open the ASD SMART APP.
  - At the top of the App, select the area where the new fixture will be located.
  - Tap the "+" button in the top right corner, then select "Add device".
  - Wait for the App to detect the fixture. Once it appears, tap "Add".
  - Enter your Wi-Fi credentials when prompted.
  - Once the fixture is successfully added, tap "Done" to complete the setup.

### FAQ:

#### 1. I can't see the device in the App:

Ensure the smart device is plugged in, Wi-Fi and Bluetooth are enabled on your mobile device, and your network hasn't reached its device limit.

*If you're still having trouble:*

- Keep the fixtures in pairing mode and reset your router.
- Verify that your Wi-Fi network is 2.4 GHz, as smart devices require this frequency.
- Ensure your smart device is within Wi-Fi range (approximately 5-10ft indoors).

#### 2. "Time out" error when connecting the device:

- On the App homepage, tap the "Me" icon in the lower right corner.
- In the upper right corner of the next screen, tap the "Settings" icon.
- Scroll to the bottom of the settings page to check the current storage occupied by the App cache.
- Close the App, reboot your phone, and try re-adding the device.

#### 3. I can't control multiple devices at once.

Ensure you are not attempting to group different types of devices (for example, a wall sconce and a security camera). Only devices of the same type can be grouped and controlled together.

*To learn more about the App, check out the instructions at this [link](#).*

## ORDERING INFORMATION

| Model                      | Product dimensions    | Weight       | Pcs. per carton | Carton size         | Carton weight | UPC          | GTIN 14        |
|----------------------------|-----------------------|--------------|-----------------|---------------------|---------------|--------------|----------------|
| ASD-LWS27C-18D20SM-RGBW-BK | 18" x 5-7/8" x 1-7/8" | 6 lbs(2.7kg) | 1               | 20.6" x 3.8" x 7.7" | 6.6 lbs       | 810128119405 | 10810128119402 |
| ASD-LWS27C-24D24SM-RGBW-BK | 24" x 5-7/8" x 1-7/8" | 8 lbs(3.6kg) | 1               | 26.6" x 3.8" x 7.7" | 8.8 lbs       | 810128119412 | 10810128119419 |

For most up-to-date spec sheets please refer to [asd-lighting.com](http://asd-lighting.com)

ASD LIGHTING CORP

E-mail: [orders@asd-lighting.com](mailto:orders@asd-lighting.com) | Web site: [www.asd-lighting.com](http://www.asd-lighting.com)

