

# KT-EX-TP2-WH3RL-SD

## EXIT SIGN

### DESCRIPTION

LED Exit Sign | Single or Double Facing | Wet Rated |  
White Finish | Red Lettering | Surface Mount |  
Battery Backup | Built-in Test Switch | 120/277V Input

### APPLICATION

UL 924 Compliant Wet Rated Exit Sign with Built-in Red Lettering. Provides 90 Minutes of Emergency Power.



### PRODUCT FEATURES


- Red LED and Diffuser Color
- Includes Single or Double Facing Configurations
- Surface Mount - Back, Side, or Top
- Integrated Backup Battery - NiMH 500mAh
- 90 Minutes of Emergency Power
- Integrated Test Switch & Charge Indicator
- UL Certified for Wet Locations
- Thermoplastic Housing - UL 94 5VA Flame Rating
- Ambient Operating Temperature: 0°C/32°F to 40°C/104°F
- Universal J-Box Mounting Pattern

### PERFORMANCE SPECIFICATIONS

| Catalog Number     | Input Voltage | Input Power | Letter Color | Housing Color | Mounting                           | Battery Type         | Battery Capacity | Recharge Time | Remote Capable |
|--------------------|---------------|-------------|--------------|---------------|------------------------------------|----------------------|------------------|---------------|----------------|
| KT-EX-TP2-WH3RL-SD | 120/277V      | 3W          | Red          | White         | Surface: Top, Side, and Back Mount | Nickel-Metal Hydride | 500mAh           | 24 Hours      | No             |

\* See Ordering Information and Catalog Number Breakdown for more details.

### PHYSICAL SPECIFICATIONS

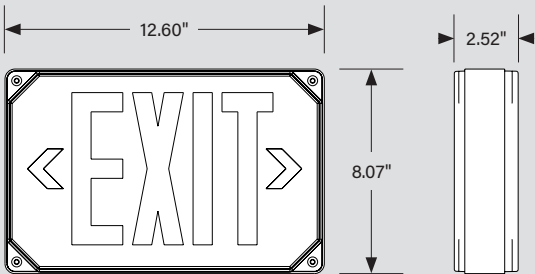

### Weight

| Fixture Weight | Carton Weight |
|----------------|---------------|
| 4.6 lbs        | 31.9 lbs      |

## KT-EX-TP2-WH3RL-SD EXIT SIGN

### FIELD-ADJUSTABLE FEATURES: CHEVRONS, FACINGS & MOUNTING ORIENTATION


This fixture is equipped with field-adjustable removable chevrons, single (front only) or double (front and back) faceplates, and three mounting options (top, side, or back).

*Note: Ensure power is off to the fixture and rechargeable battery is disconnected before making any adjustments.*

#### Use of Chevrons

Remove punchout chevron(s) on faceplate, as needed. The diffuser would need to be removed to allow chevron removal. Re-secure diffuser after chevron removal.

FACEPLATE

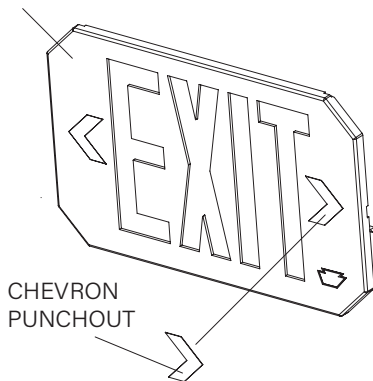

#### Single or Double-Sided Faceplates

This fixture ships with two "EXIT" sign faceplates and one back/solid faceplate to allow for either single- or double-sided Exit Sign. Single-sided Exit Sign will use one "EXIT" faceplate and the back/solid faceplate, while double-sided Exit Sign will use two "EXIT" faceplates. All three faceplates are included.

# KT-EX-TP2-WH3RL-SD

EXIT SIGN

## MOUNTING OPTIONS


### BACK MOUNT



### TOP MOUNT



### SIDE MOUNT

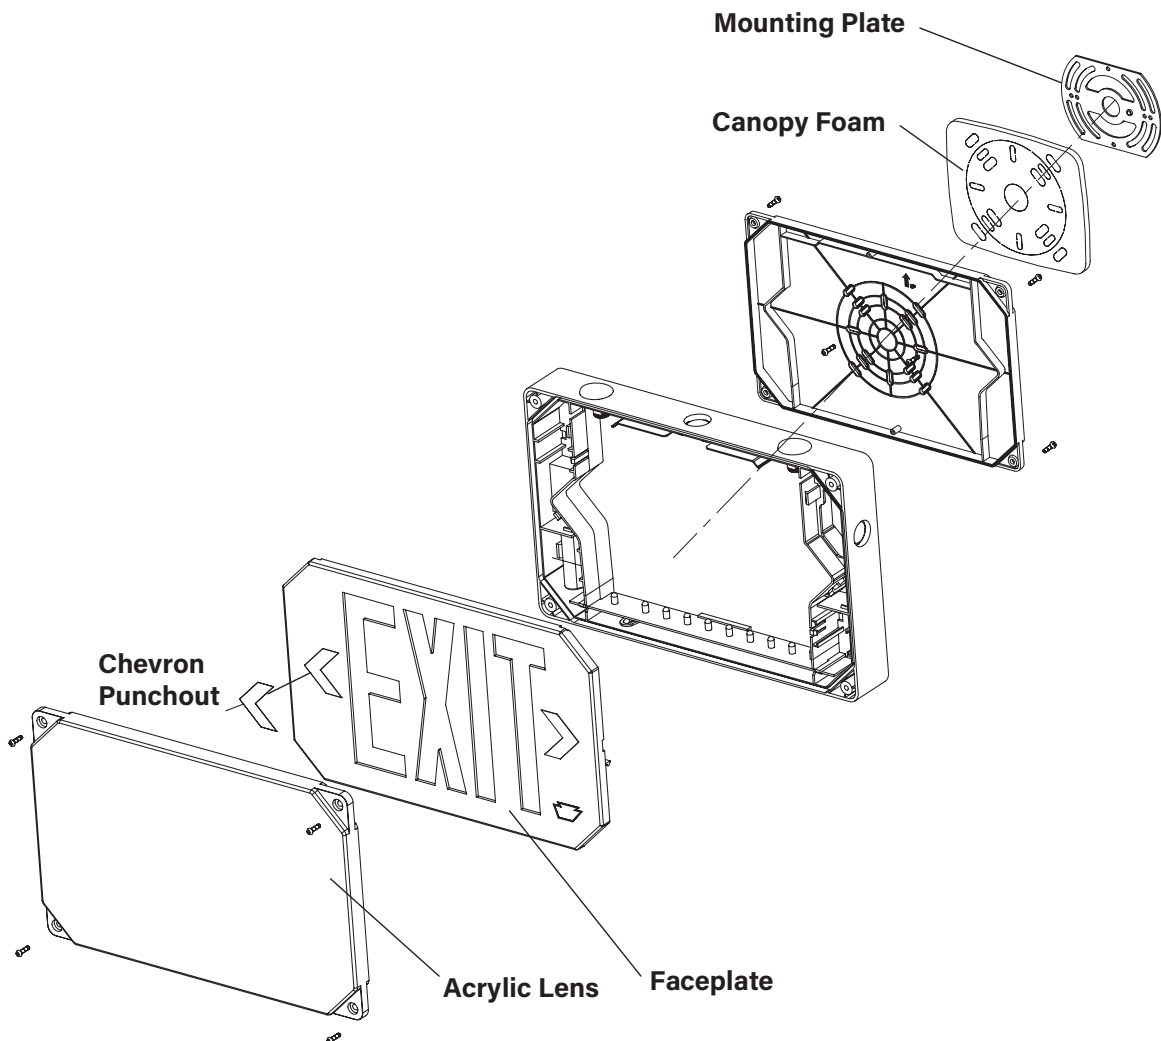



**SMART//SAFE®**

# KT-EX-TP2-WH3RL-SD

EXIT SIGN

**ORDERING INFORMATION**

| Catalog Number     | Finish | UPC          | Easy Code |
|--------------------|--------|--------------|-----------|
| KT-EX-TP2-WH3RL-SD | White  | 843654165028 | MRB-38    |

**CATALOG NUMBER BREAKDOWN**

# KT-EX-TP2-WH3RL-SD

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9

- 1 Keystone Technologies

2 Exit Sign

3 Thermo Plastic

4 Form Factor 2

5 Housing Color

6 Facings

7 Lettering Color

8 Mounting

9 Input Voltage
- 5 Housing Color

WHWhite
- 6 Facings

3Single and Double
- 7 Lettering Color

RLRed Lettering
- 8 Mounting

SSurface Mount
- 9 Input Voltage

D120/277V