

## LED EMERGENCY DRIVER

### Description:

Our VEM-K Series can be used on a large array of Lighting Fixtures for both T5 and T8 installations.

The VEM-K1500, LED emergency back-up kit includes constant wattage emergency driver, battery, high efficacy LED module and LED charging indicator light. The emergency back-up kit provides emergency lighting solution in different lighting fixture/luminaire with input power source of 120-277VAC.

VEM-K1500 switches to emergency mode when power fails, the kit gives constant 1500lm with 5000K LED module for a minimum of 90 minutes.

### Electrical:

- Multi voltage (120-277VAC 50/60Hz)
- Maintenance-free, long-life, high temperature LiFePO4 battery
- Safety extra low output voltage: 12-50VDC
- Rated 10W for 90 minutes



### Installation:

- For use with unswitched fixtures
- Does not affect existing lighting fixture/luminaire
- Suitable for damp and dry location
- Ambient temperature: 0°C/30°F - 60°C/140°F

### Warranty:

- 5 Years
- UL, cUL, UL924 listed FCC Part 15 Class A, Compliance to EN 61547/1995+A1/2000

### Case Dimensions:

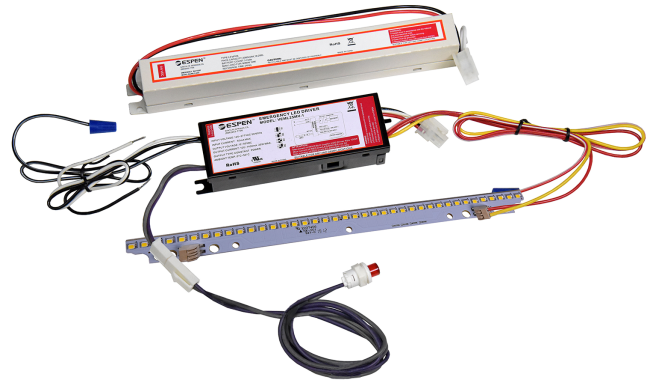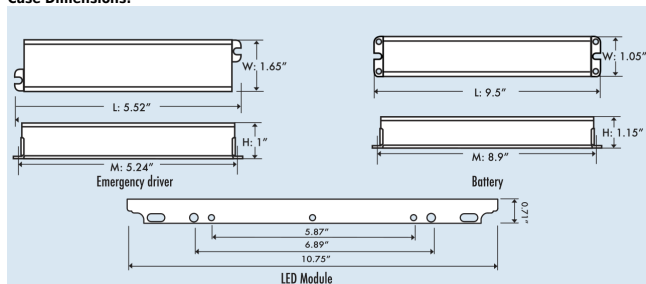

### Model: VEM-K1500

Our VEM-K Series can be used on a large array of Lighting Fixtures for both T5 and T8 installations.

The VEM-K1500, LED emergency back-up kit includes constant wattage emergency driver, battery, high efficacy LED module and LED charging indicator light. The emergency back-up kit provides emergency lighting solution in different lighting fixture/luminaire with input power source of 120-277VAC.

VEM-K1500 switches to emergency mode when power fails, the kit gives constant 1500lm with 5000K LED module for a minimum of 90 minutes.

### Technical Specifications

<b>Input Voltage</b>	120-277 VAC, 50/60Hz
<b>Lamp Operated</b>	VLM01207L/850 (10W, 34VDC, 5000K, CRI 80, 1500lm)
<b>Emergency Operation</b>	90 Mins in 10W
<b>Operating Temperature</b>	0C/30F - 60C/140F
<b>Battery</b>	24hr recharge, LiFePO4
<b>Approval</b>	UL and cUL 924 Listed

User Manual

[VEM\\_K1500.pdf](#)