


LED ARCHITECTURAL LINKABLE LINEAR - SURFACE MOUNT KIT LR42632

IMPORTANT SAFETY INSTRUCTIONS

1. Read these instructions carefully before installation.
2. Installation should be in accordance with the national and local electrical laws and regulations.
3. Product should be installed by a qualified and licensed electrician.
4. DO NOT install in humid places, for dry and non-humid environments only.
5. Always turn off the power supply before installation or maintenance.
6. To reduce the risk of fire and overheating, make sure all connections are tight and secure.
7. Fixtures should not be covered with thermal insulation pads or similar materials under any circumstance.
8. do not USE OUTDOORS.

BOX CONTENTS




SURFACE MOUNT
BRACKETS




SHORT SCREWS



LONG SCREWS




ANCHORS



SQUARE PLATE


NOTE: For linkable solutions
needs N+1 sets of surface
mount brackets

CAUTION BEFORE INSTALLATION


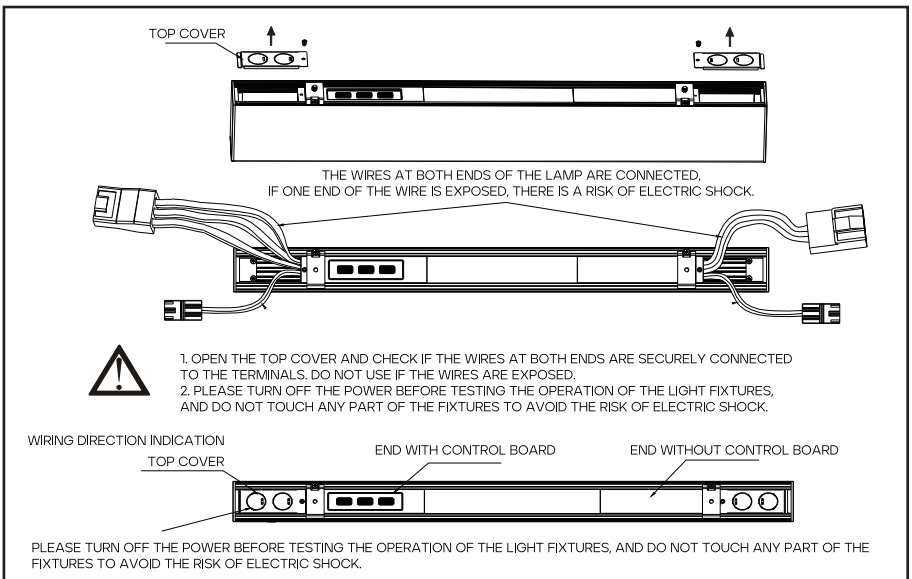


INSTRUCTIONS


1. Attach square plate onto the junction box with screws.
2. Fix the 2 surface-mounted brackets to fixture back with provided short screws.

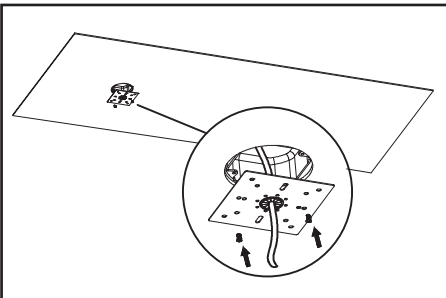

3. Put and press the fixture onto mounting surface then mark the mounting positions from brackets for next step.

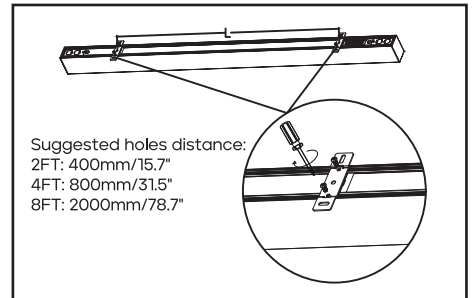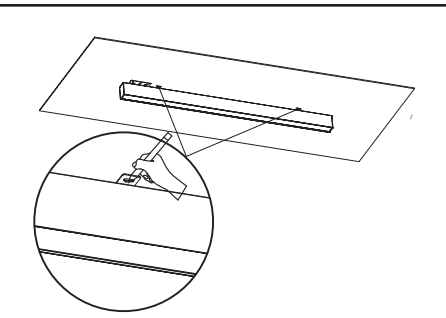


4. Drill the holes according to the marks and insert the anchors.

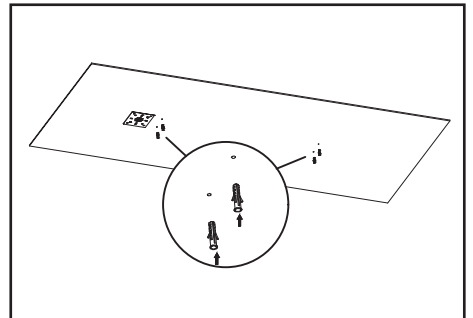

DRIVER WIRE PACKAGE


*SOLD SEPARATELY



WIRE NUTS




TIES




WIRE

WIRING

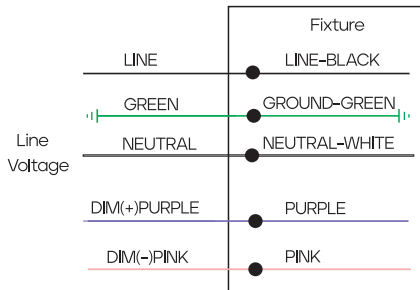


1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation

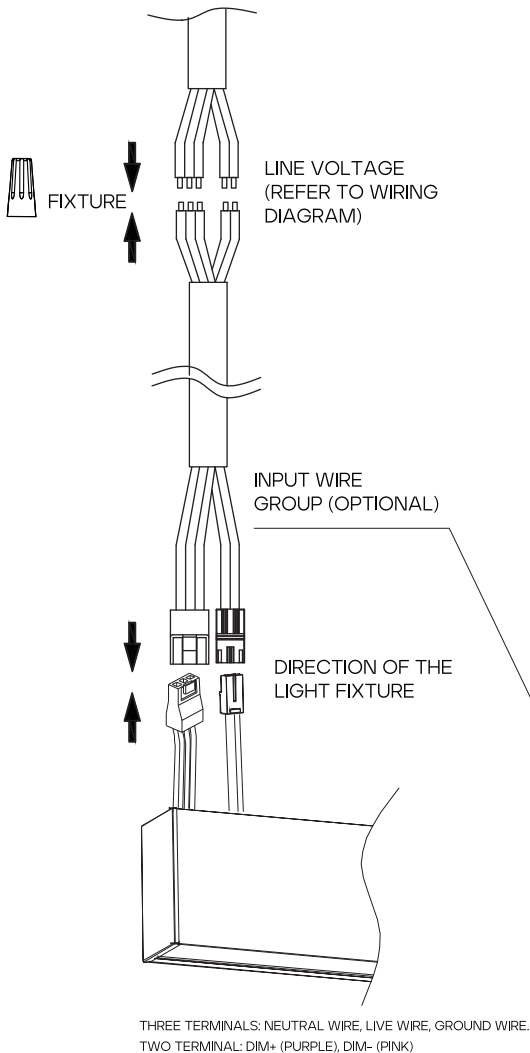

5. Cut off the corresponding terminals as required.


THREE POSITION TERMINAL:
BLACK (LINE)
WHITE (NEUTRAL)
GREEN (GND)

TWO TERMINAL:
PURPLE (DIM+)
PINK (DIM-)

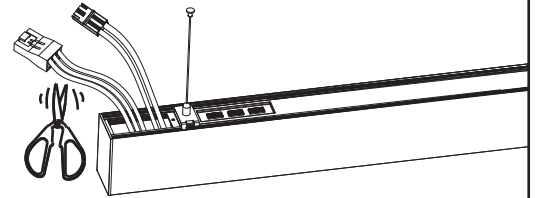


1. AFTER CUTTING OFF THE CONNECTING TERMINALS, THE LIGHT FIXTURE WILL NO LONGER BE ABLE TO LINK WITH OTHER FIXTURES THROUGH TERMINALS.
2. AFTER CUTTING THE WIRES, PLEASE ENSURE PROPER PROTECTION AND AVOID USING THEM FOR SECONDARY WIRING.


6. Wire according to the wiring diagram on the left for completion.

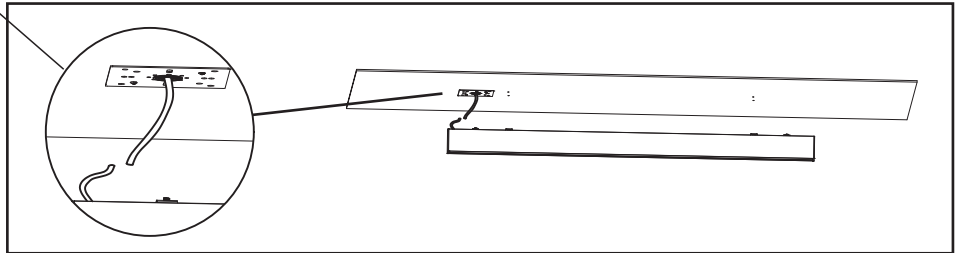

7. Secure the fixture to the mounting surface with long screws.

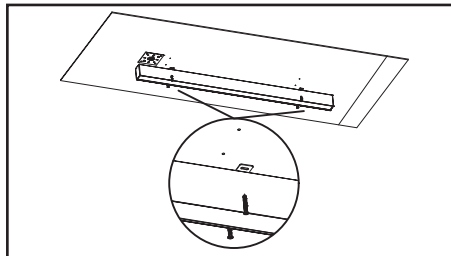

8. Installation completed

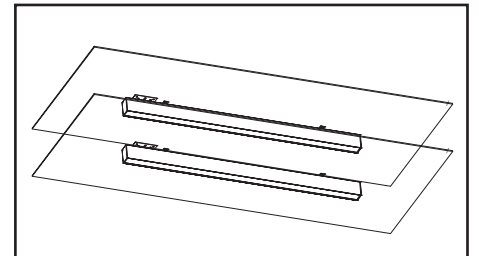

INPUT WIRE GROUP (OPTIONAL)

