


NU
PRO
alphabet

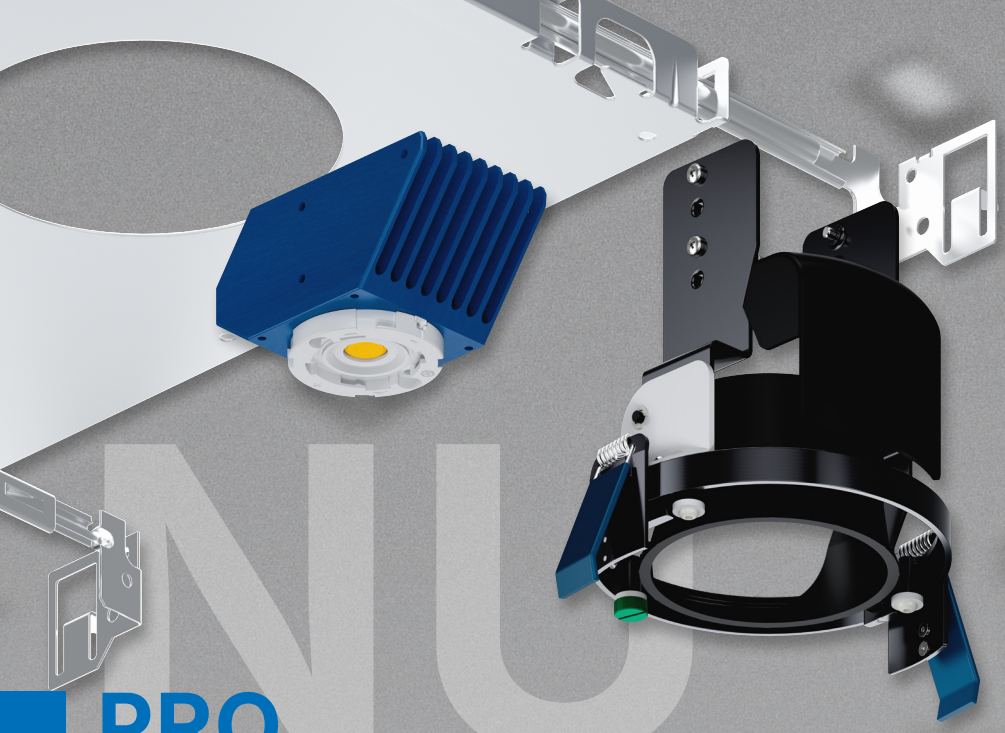

PRO
OVERVIEW

MOUNTINGS



STUD/SHALLOW PLENUM

GLARE CONTROL



HONEYCOMB LOUVER



HYPERBOLIC



LED TECHNOLOGIES



STANDARD WHITE



WARM DIM



TUNABLE WHITE




RGBW



HOSPITALITY 2200K & 2400K



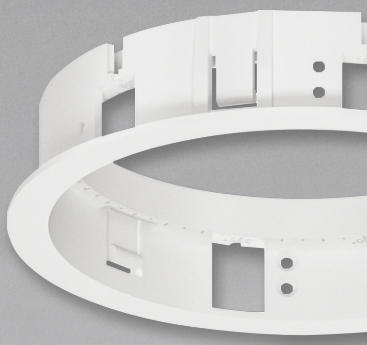

STANDARD FEATURES



NSF



WET RATED



DEAD FRONT



AIRTIGHT



PLENUM RATED



RED LIST APPROVED

SPECIALTY FEATURES



TITLE 24



REMOTE DRIVER READY



POE



TAMPER RESISTANT




ANTIMICROBIAL



LOPRO



SHALLOW PLENUM

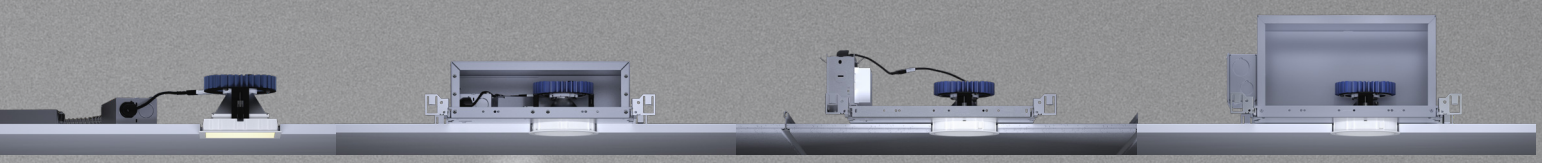

LOPRO / RET | LOPRO IC | NC | IC / ICAT / CP



PINHOLE | DEEP REGRESS | NO LENS | CLEAR LENS | HIGH EFFICIENCY TEXTURED LENS | DIFFUSED LENS | SMOOTHING BEAM LENS | WIDE DIFFUSED LENS

TRIMS




TRIMMED | TRIMLESS | MILLWORK

FINISHES



WHITE | MATTE CHROME | BLACK | BRONZE | RAL | ANTIMICROBIAL







CONTROLS

WIRED

- DALI 2, DT6 & DT8
- 0-10V
- LUTRON ECOSYSTEM
- ELV / TRIAC
- DMX

WIRELESS

- CLM CONNECTED LIGHTING MODULE
- CASAMBI
- ATHENA NODE
- NLIGHT AIR DEVICE

PRODUCT ELIGIBILITY

BABA
COMPLIANT

BAA
COMPLIANT

NUPRO AT A GLANCE



NU1PRO Pg.8

UP TO 1,300
DELIVERED LUMENS

UP TO 97 CRI

17° - 60°
BEAM ANGLE RANGE

STANDARD WHITE

2200K, 2400K, 2700K, 3000K, 3500K, 4000K

WARM DIM

3000K, DIM TO 1800K
3000K, DIM TO 2000K
2700K, DIM TO 1800K

TUNABLE WHITE

1800K TO 4000K
2700K TO 6500K

0-10 | DALI 2, DT6 & DT8 |
LUTRON ECOSYSTEM |
ELV | NLIGHT | DMX |
ATHENA | NLIGHT AIR |
CLM | CASAMBI



NU2PRO Pg.9

UP TO 2,800
DELIVERED LUMENS

UP TO 97 CRI

15° - 60°
BEAM ANGLE RANGE

STANDARD WHITE

2200K, 2400K, 2700K, 3000K, 3500K, 4000K

WARM DIM

3000K, DIM TO 1800K
3000K, DIM TO 2000K
2700K, DIM TO 1800K

TUNABLE WHITE

1800K TO 4000K
2700K TO 6500K

0-10 | DALI 2, DT6 & DT8 |
LUTRON ECOSYSTEM |
ELV | NLIGHT | DMX |
ATHENA | NLIGHT AIR |
CLM | CASAMBI



NU3PRO Pg.10

UP TO 3,100
DELIVERED LUMENS

UP TO 97 CRI

9° - 104°
BEAM ANGLE RANGE

STANDARD WHITE

2200K, 2400K, 2700K, 3000K, 3500K, 4000K

WARM DIM

3000K, DIM TO 1800K
3000K, DIM TO 2000K
2700K, DIM TO 1800K

TUNABLE WHITE

1800K TO 4000K
2700K TO 6500K

0-10 | DALI 2, DT6 & DT8 |
LUTRON ECOSYSTEM |
ELV | NLIGHT | DMX |
ATHENA | NLIGHT AIR |
CLM | CASAMBI



NU4*PRO* Pg.12

UP TO 4,200
DELIVERED LUMENS

UP TO 97 CRI

8° - 110°
BEAM ANGLE RANGE

STANDARD WHITE

2200K, 2400K, 2700K, 3000K, 3500K, 4000K

WARM DIM

3000K, DIM TO 1800K
3000K, DIM TO 2000K
2700K, DIM TO 1800K

TUNABLE WHITE

1800K TO 4000K
2700K TO 6500K

RGBW

0-10 | DALI 2, DT6 & DT8 |
LUTRON ECOSYSTEM |
ELV | NLIGHT | DMX |
ATHENA | NLIGHT AIR |
CLM | CASAMBI



NU6*PRO* Pg.14

UP TO 9,000
DELIVERED LUMENS

UP TO 97 CRI

12° -109°
BEAM ANGLE RANGE

STANDARD WHITE

2700K, 3000K, 3500K, 4000K

WARM DIM

3000K, DIM TO 1800K
3000K, DIM TO 2000K
2700K, DIM TO 1800K

TUNABLE WHITE

1800K TO 4000K
2700K TO 6500K

RGBW

0-10 | DALI 2, DT6 & DT8 |
LUTRON ECOSYSTEM |
ELV | NLIGHT | DMX |
ATHENA | NLIGHT AIR |
CLM | CASAMBI



NU8*PRO* Pg.15

UP TO 9,000
DELIVERED LUMENS

UP TO 97 CRI

12° - 109°
BEAM ANGLE RANGE

STANDARD WHITE

2700K, 3000K, 3500K, 4000K

WARM DIM

3000K, DIM TO 1800K
3000K, DIM TO 2000K
2700K, DIM TO 1800K

TUNABLE WHITE

1800K TO 4000K
2700K TO 6500K

RGBW

0-10 | DALI 2, DT6 & DT8 |
LUTRON ECOSYSTEM |
ELV | NLIGHT | DMX |
ATHENA | NLIGHT AIR |
CLM | CASAMBI

NU SPECIALTY *AT A GLANCE*



VARIABLE
WALL WASH Pg.19

3” & 4”
ROUND AND SQUARE

WALL WASH

STANDARD WHITE

2700K, 3000K, 3500K, 4000K

WARM DIM

3000K, DIM TO 1800K
3000K, DIM TO 2000K
2700K, DIM TO 1600K

TUNABLE WHITE

1800K TO 4000K
2700K TO 6500K

RGBW

UP TO 2,600
DELIVERED LUMENS

UP TO 97 CRI

WALL WASH

0-10 | DALI 2, DT6 & DT8 |
LUTRON ECOSYSTEM |
ELV | NLIGHT | DMX |
ATHENA | NLIGHT AIR |
CLM | CASAMBI



TAMPER
RESISTANT Pg.21

3”, 4” & 6”
ROUND AND SQUARE

DOWNLIGHT, ADJUSTABLE,
WALL WASH

STANDARD WHITE

2700K, 3000K, 3500K, 4000K

WARM DIM

3000K, DIM TO 1800K
3000K, DIM TO 2000K
2700K, DIM TO 1600K

TUNABLE WHITE

1800K TO 4000K
2700K TO 6500K


RGBW

UP TO 4,000
DELIVERED LUMENS

UP TO 97 CRI

9° - 75°
BEAM ANGLE RANGE

0-10 | DALI 2, DT6 & DT8 |
LUTRON ECOSYSTEM |
ELV | NLIGHT | DMX |
ATHENA | NLIGHT AIR |
CLM | CASAMBI

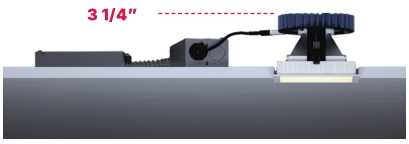

LOPRO
SHALLOW Pg.22

3” & 4”
ROUND AND SQUARE

DOWNLIGHT, ADJUSTABLE,
WALL WASH

STANDARD WHITE

2200K, 2400K, 2700K, 3000K,
3500K, 4000K

WARM DIM

3000K, DIM TO 1800K
3000K, DIM TO 2000K
2700K, DIM TO 1800K


3”- UGR<5
4”- UGR<11

UP TO 3,100
DELIVERED LUMENS

UP TO 97 CRI

9° - 110°
BEAM ANGLE RANGE

0-10 | ELV



STUD
SHALLOWEST Pg.23

4"
ROUND AND SQUARE

DOWNLIGHT, WALL WASH

STANDARD WHITE

2700K, 3000K, 3500K, 4000K

UP TO 1500
DELIVERED LUMENS

UP TO 90 CRI

85°
BEAM ANGLE

0-10 | DALI 2 | DMX | ELV



DEEP REGRESS
LOW GLARE Pg.24

1", 2", 3" & 4"
ROUND AND SQUARE

1" UGR<5.1 , 38° CUT-OFF ANGLE
2" UGR<5.1 , 38° CUT-OFF ANGLE
3" UGR<5, 32.5° CUT-OFF ANGLE
4" UGR<5, 38.5° CUT-OFF ANGLE

STANDARD WHITE

2200K, 2400K, 2700K, 3000K, 3500K, 4000K

WARM DIM

3000K, DIM TO 2000K
2700K, DIM TO 1800K

TUNABLE WHITE

1800K TO 4000K
2700K TO 6500K

UP 3,400
DELIVERED LUMENS

UP TO 97 CRI

9° - 55°
BEAM ANGLE RANGE

0-10 | DALI 2, DT6 & DT8 |
LUTRON ECOSYSTEM |
ELV | NLIGHT | DMX |
ATHENA | NLIGHT AIR |
CLM | CASAMBI



HYPERBOLIC
QUIET CEILING Pg.25

4"
ROUND AND SQUARE

DOWNLIGHT

4"- UGR<12, 45° CUT-OFF ANGLE

STANDARD WHITE

2200K, 2400K, 2700K, 3000K, 3500K, 4000K

WARM DIM

3000K, DIM TO 2000K
2700K, DIM TO 1800K

TUNABLE WHITE

1800K TO 4000K
2700K TO 6500K

UP 3,400
DELIVERED LUMENS

UP TO 97 CRI

80° CUTOFF ANGLE OR 115° CUTOFF ANGLE

0-10 | DALI 2, DT6 & DT8 |
LUTRON ECOSYSTEM |
ELV | NLIGHT | DMX |
ATHENA | NLIGHT AIR |
CLM | CASAMBI

NU1PRO



DOWNLIGHT



WALL WASH



ADJUSTABLE

NU1 PRO

1" Round or Square Recessed Fixture
Up to 1300 Delivered Lumens
17° - 60° beam angle options
Trimmed, Trimless & Millwork

SW WD TW

NU2PRO



DOWNLIGHT



WALL WASH



ADJUSTABLE

NU2 PRO

2" Round or Square Recessed Fixture
Up to 2,800 Delivered Lumens
15° - 60° beam angle options
Trimmed, Trimless & Millwork

SW WD TW


NU3PRO



3 1/4"

3"

DOWNLIGHT

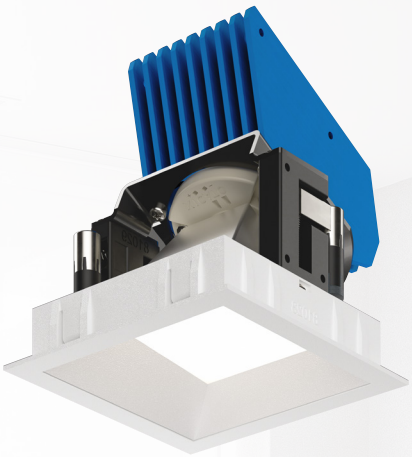

WALL WASH



ADJUSTABLE

NU3 PRO

3" Round or Square Recessed Fixture
Up to 3300 Delivered Lumens
10° - 104° beam angle options
Trimmed, Trimless & Millwork

SW WD TW



NU3
TOOL-LESS
ADJUSTABLE


TRUE 35° *ADJUSTABLE*

Zero ceiling line obstruction at full tilt
Concentric tilt tracking ensures minimal light loss
9° - 55° beam angle options
360° Lockable Rotation

NU4PRO



DOWNLIGHT

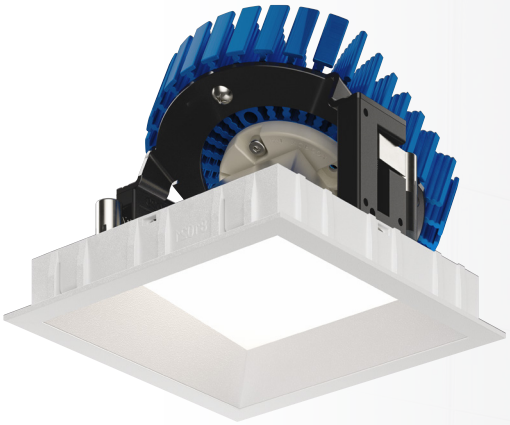

WALL WASH



ADJUSTABLE

NU4 PRO

4" Round or Square Recessed Fixture
Up to 4,200 Delivered lumens
8° - 110° Beam angle options
Trimmed, Trimless & Millwork

SW WD TW RGBW




NU4
TOOL-LESS
ADJUSTABLE

LOCKABLE
TILT & PAN


TRUE 45° *ADJUSTABLE*

Zero ceiling line obstruction at full tilt
Concentric tilt tracking ensures minimal light loss
9.5° - 60° beam angle options
360° Lockable Rotation

NU6PRO

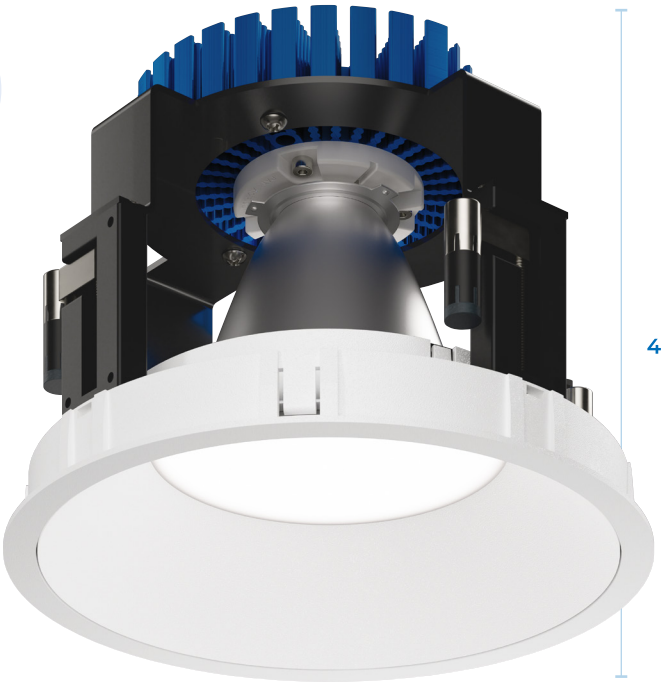

DOWNLIGHT

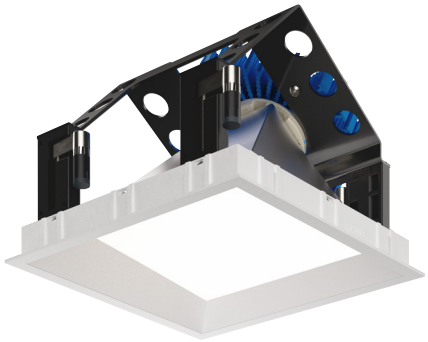

WALL WASH



ADJUSTABLE

NU6PRO

6" Round or Square Recessed Fixture
Up to 9,000 Delivered Lumens
12° - 109° beam angle range

SW WD TW RGBW

NU8PRO



WHITE



BLACK



MATTE CHROME

NU8PRO


8" Round Recessed Fixture
Up to 9,000 Delivered Lumens
12° - 109° beam angle range

SW WD TW RGBW


NU*SPECIALTY*



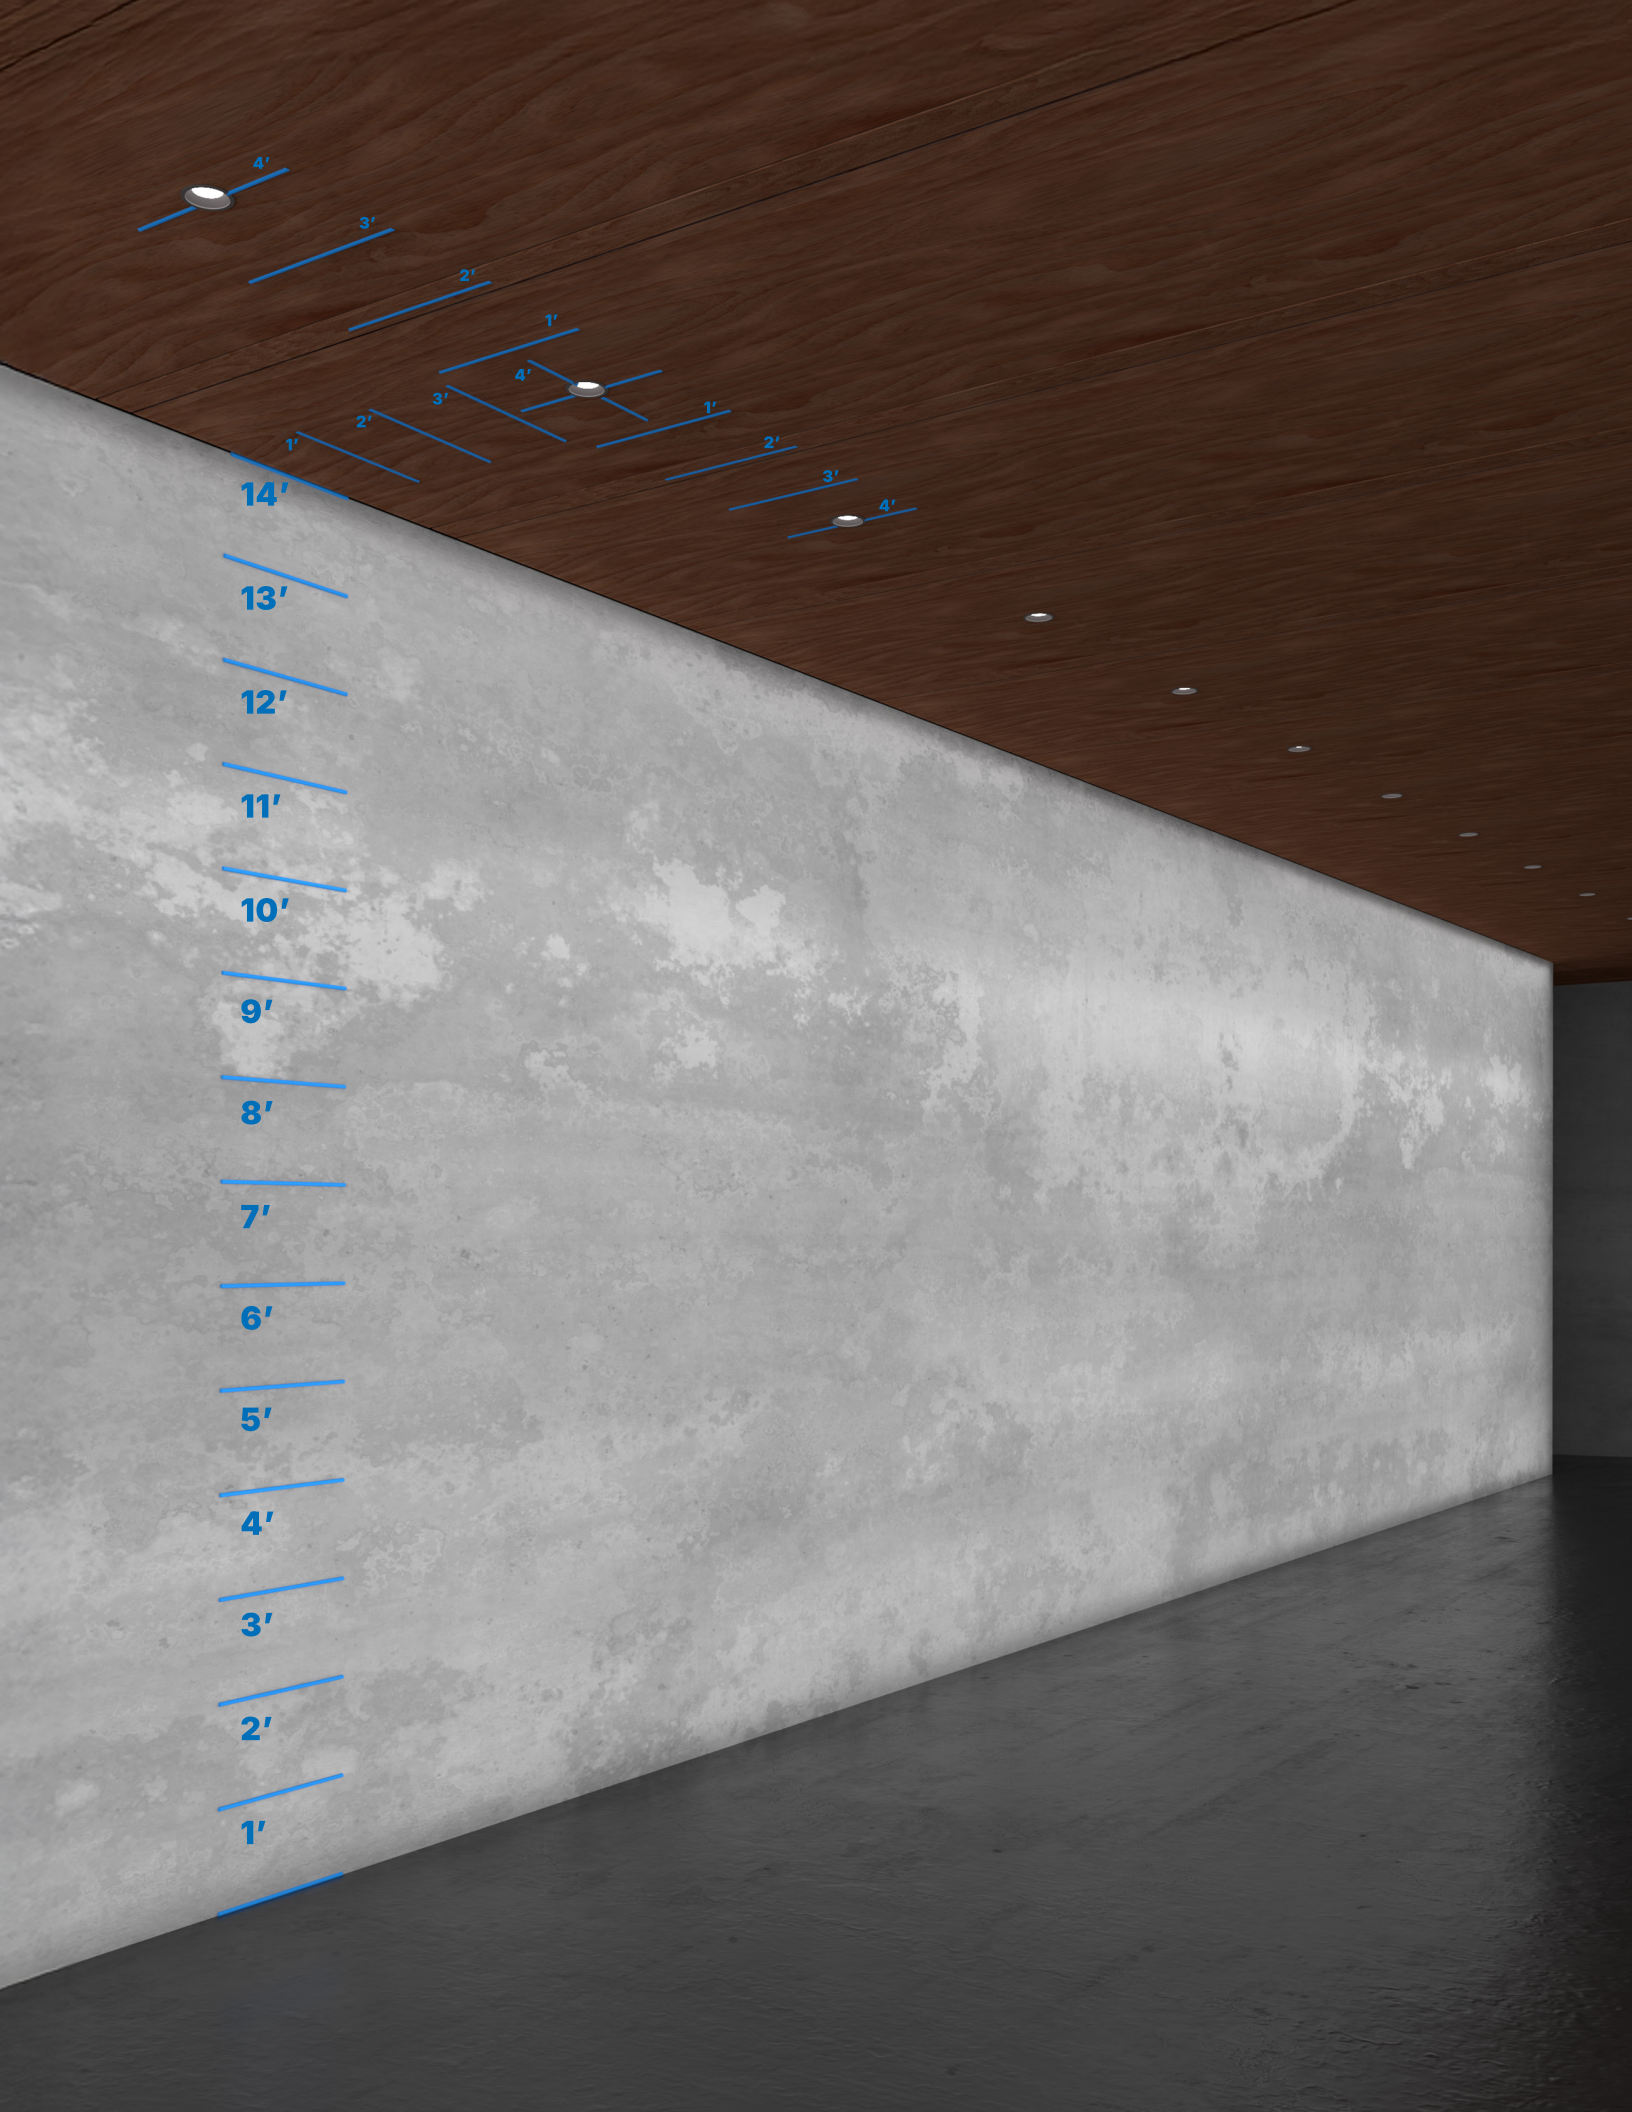


4′
3′
2′
1′
4′
3′
2′
1′
1′
2′
3′
4′
14′
13′
12′
11′
10′
9′
8′
7′
6′
5′
4′
3′
2′
1′

EVEN ILLUMINATION *FROM TOP TO BOTTOM WITH* NO SCALLOPING

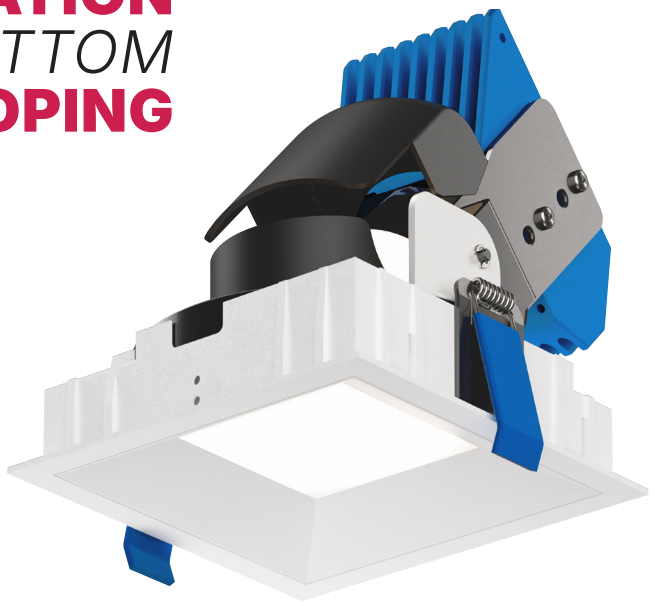

NU4QVW



NU4RVW

VARIABLE WALL WASH

- Light uniformity from ceiling line (≥ 15') to floor with no scalloping
- Flexible spacing options
- Placement of light intensity at any desired wall location
- Easily navigate ceiling obstructions because of flexible spacing

SW WD TW RGBW

ANTIMICROBIAL *OPTION*

Our antimicrobial paint is a clear, EPA-registered latex coating that can kill certain bacteria, mold, and mildew on painted surfaces within two hours of exposure. It eliminates 99% of bacterial growth and lasts the lifetime of the fixture.



NYS-OMH

NEW YORK STATE
OFFICE OF MENTAL HEALTH

New York State has a large, multi-faceted mental health system that serves more than 900,000 individuals each year. OMH also regulates, certifies and oversees more than 4,500 programs, operated by local governments and nonprofit agencies. The NYS-OMH has reviewed our Tamper-Resistant Downlights for high-risk environments, meeting their meticulous standards.



IK 10

ANTI-LIGATURE


This anti-ligature fixture is made with safe, durable materials and features an IK10 rating—the highest level of impact resistance, withstanding 20 joules of force (equal to an 11-pound object dropped from 16 inches). It includes a 0.25” impact-resistant polycarbonate lens and a locking aluminum frame with vandal-resistant screws.



BUILT TO WITHSTAND *ANY* *INDOOR* ENVIRONMENT



NU3*TR*

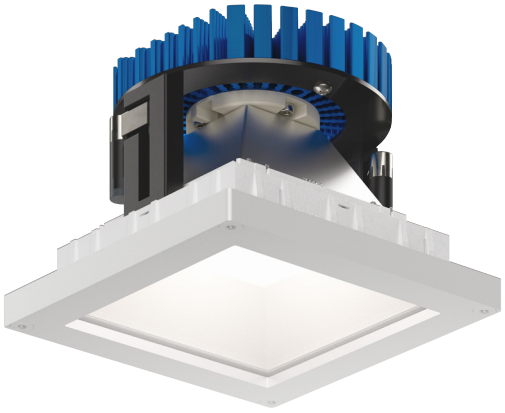

NU4*TR*





NU6*TR*

TAMPER RESISTANT

Designed to meet NYS-OMH rigorous requirements
Polycarbonate shatterproof lensing & tamper resistant screws
Designed for mental health facilities



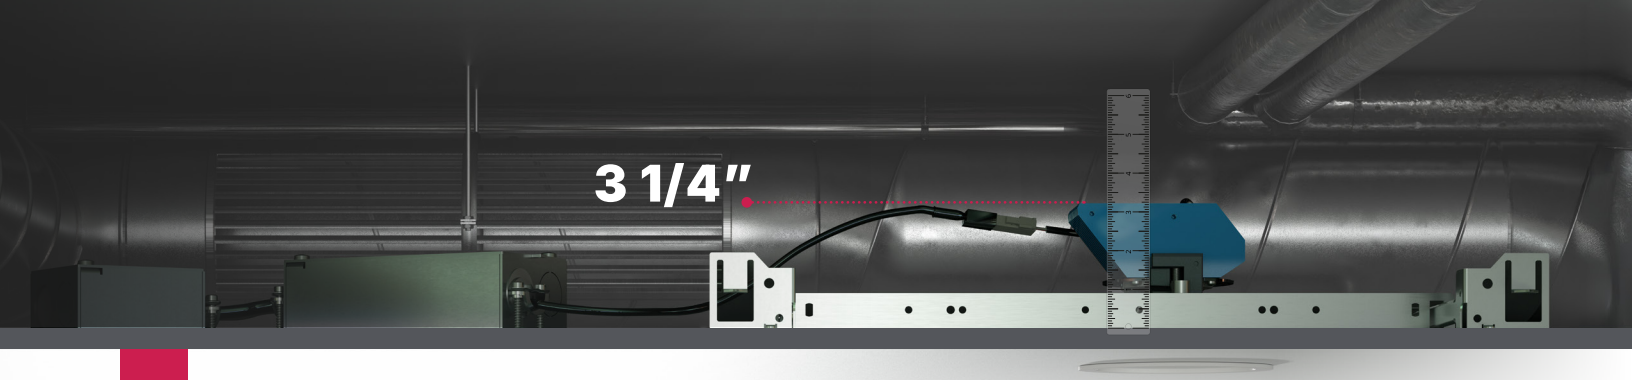


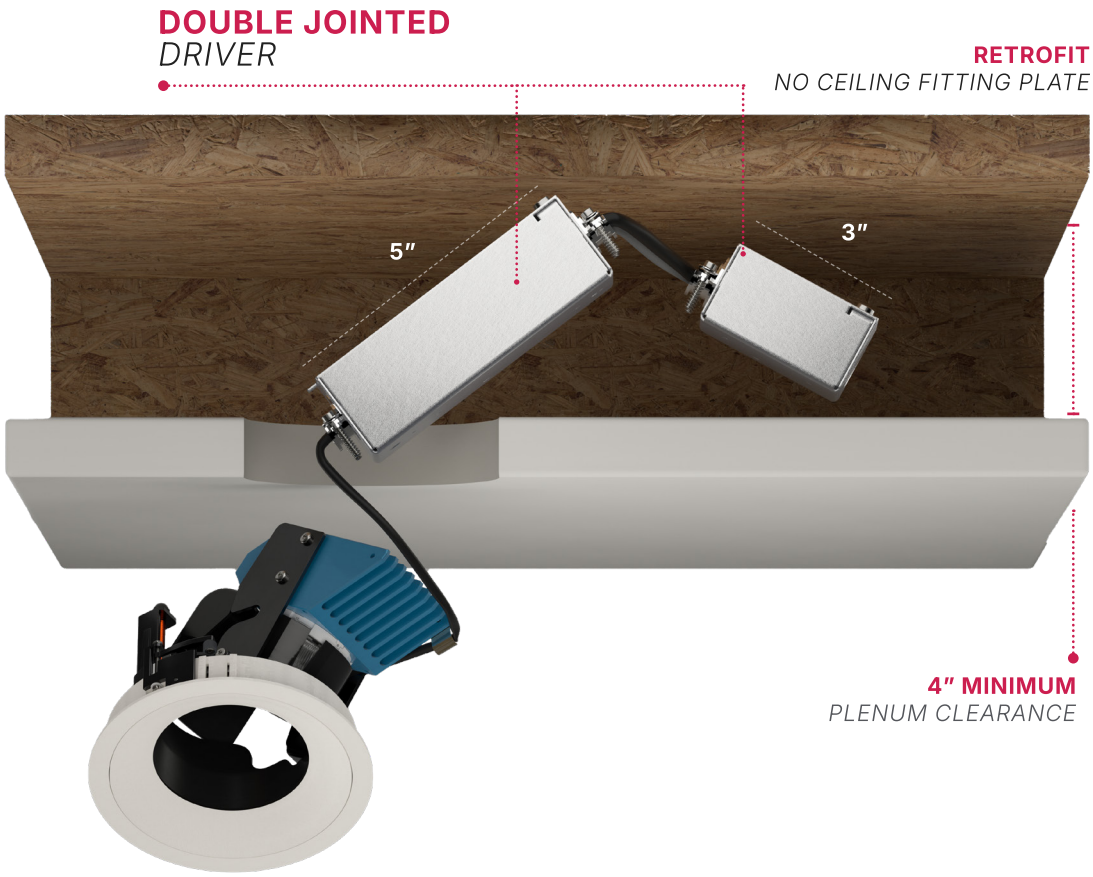

LOPRO

3" & 4" Round or Square Low Profile Fixture
Low profile double jointed driver
45° Cut off, UGR >5
3-3/4" IC BOX

SW WD

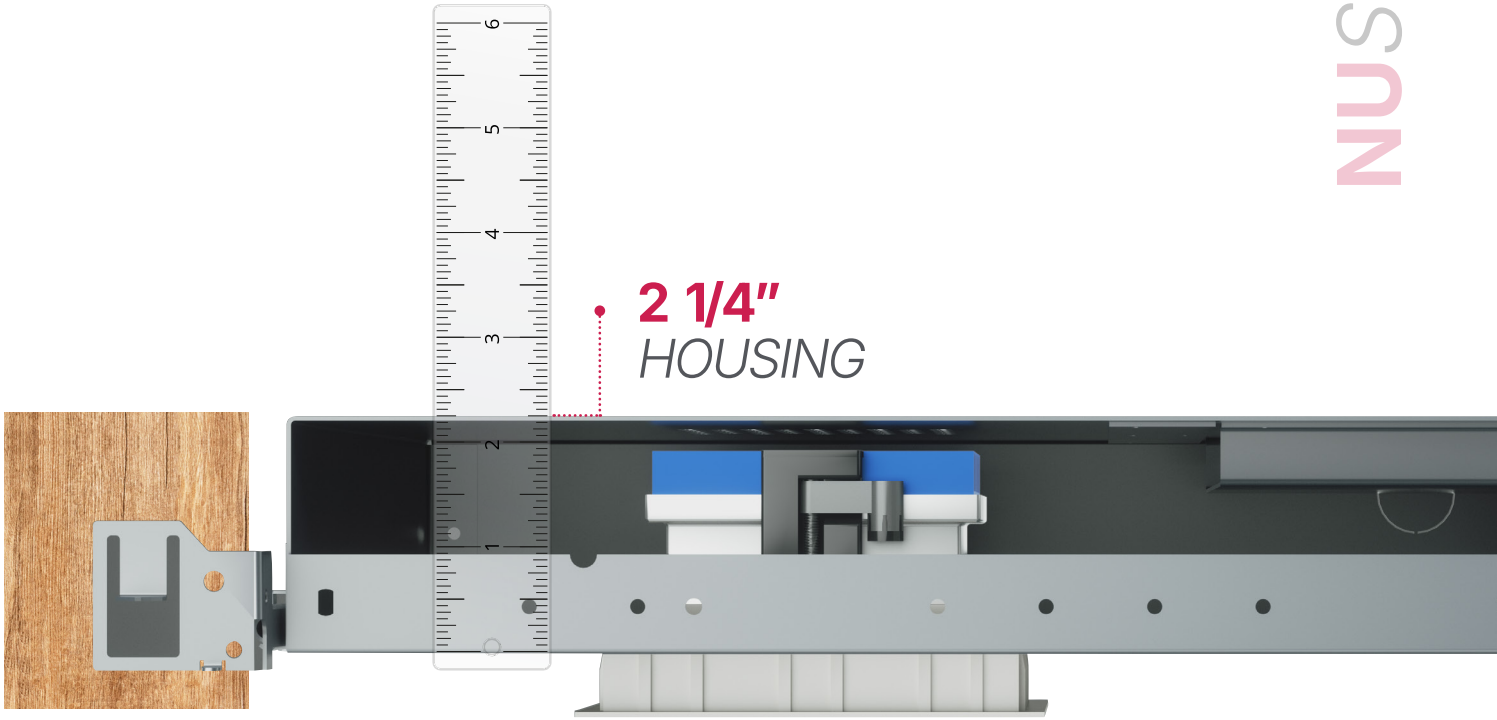

NU STUD

4" Round or Square Ultra Shallow Fixture
Up to 1500 delivered lumens
2 1/4" Plenum Housing
Downlight or Wall Wash

SW









NU1 DR



NU2 DR



NU3 DR



NU4 DR

DEEP REGRESS

1", 2", 3" or 4" Round or Square Quiet Ceiling Fixture
Zero ceiling line obstruction at Full Tilt
Superior 38.5° cut off angle, UGR <5
9° - 55° Beam angle options



SW WD TW

Declare.

QUIET CEILING


NU HYPERBOLIC







NU4 RH



NU4 QH

NU HYPERBOLIC

4" Round or Square Downlight
Up to 3400 Delivered Lumens
UGR <5
Diffused 45° or 50° reflector



SW WD TW

NU PRO

BEYOND THE NUPRO SERIES



TECHNOLOGIES

- STANDARD WHITE
- WARM DIM
- TUNABLE WHITE
- RGBW
- HOSPITALITY
  2200K & 2400K

SHAPE

- SQUARE & ROUND

TYPE

- DOWNLIGHT, WALLWASH & ADJUSTABLE

TRIMS

- TRIMMED
- TRIMLESS
- TRIMLESS MILLWORK

CRI

- UP TO 97 CRI

UNIQUE TO APERTURE

1"	2"	3"	4"	6"	8"
UP TO 1,300 DELIVERED LUMENS	UP TO 2,800 DELIVERED LUMENS	UP TO 3,100 DELIVERED LUMENS	UP TO 4,200 DELIVERED LUMENS	UP TO 9,000 DELIVERED LUMENS	UP TO 9,000 DELIVERED LUMENS
17°-60°	15°-60°	12°-104°	8°-110°	12°-110°	12-110°

ALL THE NUPRO FEATURES INSIDE A ***BETA****PRO*

FINISHES

- WHITE
- MATTE CHROME
- BLACK
- BRONZE
- CUSTOM RAL

STANDARD FEATURES

- NSF
- WET RATED
- DEAD FRONT
- AIRTIGHT
- PLENUM RATED
- RED LIST APPROVED
- BABA COMPLIANT
- BAA COMPLIANT

SPECIALTY FEATURES

- TITLE 24
- REMOTE DRIVER READY
- POE
- TAMPER RESISTANT
- ANTIMICROBIAL
- LOPRO
- SHALLOW PLENUM

CONTROLS

- WIRED
  - DALI 2, DT6 & DT8
  - 0-10V
  - LUTRON ECOSYSTEM
  - ELV/TRIAC
  - DMX
- WIRELESS
  - CLM CONNECTED LIGHTING MODULE
  - CASAMBI
  - ATHENA NODE
  - NLIGHT AIR DEVICE

PERFORMANCE *MEETS* ***FEATURES***

ESSENTIALS

TECHNOLOGIES

- STANDARD WHITE
- WARM DIM

SHAPE

- SQUARE & ROUND

TYPE

- DOWNLIGHT, WALLWASH & ADJUSTABLE

TRIMS

- TRIMMED
- TRIMLESS

CRI

- UP TO 90 CRI

UNIQUE TO APERTURE

- 3"
  - UP TO 1,700 DELIVERED LUMENS
  - 30°- 80°
- 4"
  - UP TO 2,000 DELIVERED LUMENS
  - 13° - 80°

FINISHES

- WHITE
- MATTE CHROME
- BLACK

STANDARD FEATURES

- NSF
- WET RATED
- AIRTIGHT
- PLENUM RATED

SPECIALTY FEATURES

- TITLE 24
- IC NO BOX
- LOW GLARE

CONTROLS

- WIRED
- 0-10V ELV/TRIAC

VALUE *MEETS* **PERFORMANCE**

CORE

TECHNOLOGIES

- SW STATIC CCT
- SW SELECT CCT

SHAPE

- SQUARE & ROUND

TYPE

- DOWNLIGHT & WALLWASH

CRI

- UP TO 90 CRI

UNIQUE TO APERTURE

- 4"
  - 10W, 15W, 20W, 25W SELECTABLE OR FIXED WATTAGE
  - 50°-70°
- 6"
  - 50°-90°

FINISHES

- WHITE
- BLACK
- CLEAR

STANDARD FEATURES

- WET RATED
- PLENUM RATED

SPECIALTY FEATURES

- TITLE 24
- ENERGY STAR
- IC NO BOX

CONTROLS

- WIRED
- 0-10V ELV/TRIAC

EFFICIENCY *MEETS* **VALUE**



NU

88 MAXWELL
IRVINE, CA 92618
714.259.9959

ALPHABETLIGHTING.COM