alphabet


PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			


NU3

3" Round Wall Wash Warm Dim


NSF | AT airtight | DF dead-front | PR plenum rated | wet rated

WW BEAM (Note: Specifications are subject to change without notice)		
14mm COB PERFORMANCE DATA		
LED LIGHT ENGINE	NOMINAL DELIVERED LUMENS	SYSTEM WATTAGE
10LM	630LM @30K/97CRI	13W
13LM	920LM @30K/97CRI	17W
20LM	1380LM @30K/97CRI	27W
30LM	2010LM @30K/97CRI	40W
Note	Delivered lumens based on WW optic with no lens, (see page 2)	

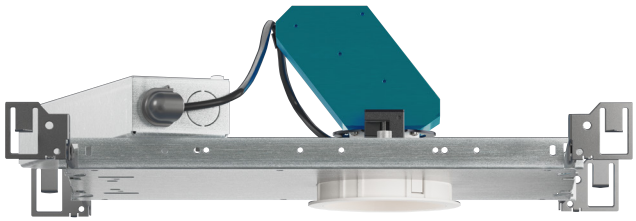



Trim



Trimless



Trimless Millwork

FEATURES
- An asymmetric reflector with highly efficient BrightView angle bending lens produces excellent wall washing with no scalloping
- 4' set back with 6' on center spacing - 15 FC average
- 3/4" bezel regress with 1/16" micro flange
- Custom finishes available
- Microban® antimicrobial finish available on all exposed painted surfaces

DIMMING AND CONTROLS
- eldoLED flicker free 0-10V dimming to 0% and 1%
- eldoLED flicker free DALI dimming to 0% and 1%
- Lutron Hi-lumen 2-Wire (Eco System) dimming to 0.1% and 1%
- Leading & trailing edge (Triac/ELV) dimming to 1%
- Casambi dimming to 1.0%
- NLight control interface dimming to 0%

CONSTRUCTION
- Lexan™ (PC) highly resistant to impact and heat (240°F)
- Optimal material for wireless signal connectivity
- Shatter proof acrylic bezel lens
- Electrocoated 16-gauge cold-rolled steel construction
- Accommodates ceiling thickness from 1/8" to 5/8"


LED
- Luminus Dim-to-warm COB: 97 CRI: SDCM = 3-step MacAdam Ellipse; Lumen Maintenance: L_{70} > 54,000 hrs

LISTING
- ULus Listed to UL1598 & UL2108; cUL Listed to CSA C22.2 #250.0
- IP65 with lens - Suitable for wet locations with lens - Suitable for damp locations without lens
- Non-conductive, dead-front construction (shower approved)
- NSF/ANSI-2 with lens (Non-Food and Splash Zones)
- **Declare.** - LBC Red List Approved
- 5 Year Limited warranty


ELECTRICAL
- 120V-277V, 120 only Triac / ELV
- Power factor ≥ 0.9
- 2kV driver input surge protection
- Remote emergency test switch
- 7W, 10W (T20 CEC) and 12W EM 90min battery
- Max. ambient installation temperature 95°F (35°C)

FIXTURE HEIGHT


10LM-20LM LOW LUMENS




30LM HIGH LUMENS

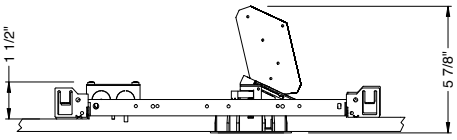


TRIMMED

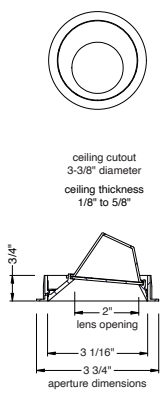

TRIMLESS

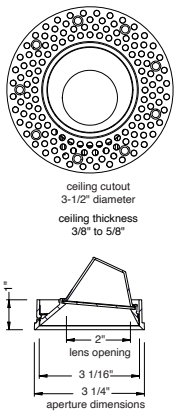

MILLWORK

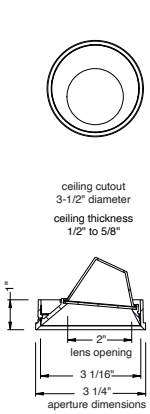

alphabet

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

WW BEAM ORDERING CODE

SERIES	**NU3**	NU3
TYPE	**RW**	round wall wash
	RWT	round wall wash trimless
	RWTMW	round wall wash trimless millwork
LED	**WD**	warm dim (Luminus)
DELIVERED LUMENS	**10LM**	630 lm
	13LM	920 lm
	20LM	1380 lm
	30LM	2010 lm
	Standard Configuration: 3000K 97CRI **Calculated Delivered Lumens** = [Delivered Lumen Value] x [CCT Multiplier]	
CCT	**3018**	3000K, dim to 1800K

CCT at Light Level (%LF)

%LF	30LM	20LM	13LM	10LM
100%	3000	3000	3000	3000
50%	3000	3000	3000	2800
25%	2800	2800	2500	2300
10%	2200	2200	2000	1900
5%	1800	1800	1800	1800

CRI	**97**	97 CRI
OPTIC & LM MULTIPLIER SEE PAGE 3	**WW**	wall wash with diffused angle bending lens
TRIM COLOR SEE PAGE 3	**BK**	black
	WH	white
	MC	matte chrome
	BZ	bronze
	WT	wheat
	CC[1]	custom color, consult factory for details
	Antimicrobial finish, add **AM** to black, white or matte chrome i.e. BKAM.	
	Not applicable to trimless option. Do not include in trimless ordering code.	

BEZEL COLOR SEE PAGE 3	**BK**	black	(0.98)
	WH	white	(1.00)
	MC	matte chrome	(0.99)
	BZ	bronze	(0.98)
	WT	wheat	(0.99)
	CC[1]	custom color, consult factory for details	
	Antimicrobial finish, add **AM** to black, white or matte chrome i.e. BKAM.		

WW BEAM ORDERING CODE

MOUNTING OPTIONS SEE PAGE 5, 6	**NC**	new construction with ceiling fitting plate
	IC[2]	insulation contact housing
	ICAT[2]	insulation contact/airtight housing
	CP[2]	chicago plenum housing
	RET	retrofit, no ceiling fitting plate
VOLTAGE	**120**	120V
	UNV	120V-277V
DIMMING	**DIM10**	eldoLED flicker free 0-10V dim to 1%
	DIM10Z	eldoLED flicker free 0-10V dim 0.1%
	DALI	eldoLED flicker free DALI-2 dim to 1%
	DALIZ	eldoLED flicker free DALI-2 dim to 0.1%
	LUTP[3]	Lutron Hi-Lume Eco (fade) dim to 0.1%
	ELV1[4]	leading edge & trailing edge (Triac/ELV) dim to 1%
	NLT[5]	nLight control interface: Cat-5/RJ45, dim to off
	CAS	Casambi control with flicker free 1% dimming
ELECTRICAL OPTIONS	**EM7**	remote emergency battery, 90 min at 7W
	EM12	remote emergency battery, 90 min at 12W
	EM10CA20	remote emergency battery, 90 min at 10W

ADDITIONAL MOUNTING INFO

New Construction Bar Hangers (included)	Mounting Length: 14-3/4" to 26"
Extension Kit p/n: K20266 (ordered separately, 1 per fixture)	*Extends a pair of Bar Hangers* Total Mounting Length: 29" to 48"

YOUR COMPLETED ORDERING CODE

Follow the steps to specify your fixture, example:

NU3 - RW - WD - 13LM - 3018 - 97 - WW - WH - WH - NC - UNV - DIM10 - EM7

NOTES

1. Custom set up fee plus minimum quantity required per color.
2. IC/ICAT/CP not available in 20LM/30LM.
3. LUTP not available in 20LM/30LM.
4. ELV1 available in 120V
5. For servicing access above ceiling is required.

* EldoLED uses logarithmic dimming curve as standard. For linear dimming curve, add "LIN" after dimming code, i.e. DIM10LIN.
* Values shown are for reference only. Actual CCT may vary.

alphabet


PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

TRIM OPTIONS

TRIM/BEZEL COLORS



PHOTOMETRIC DATA DIAGRAM

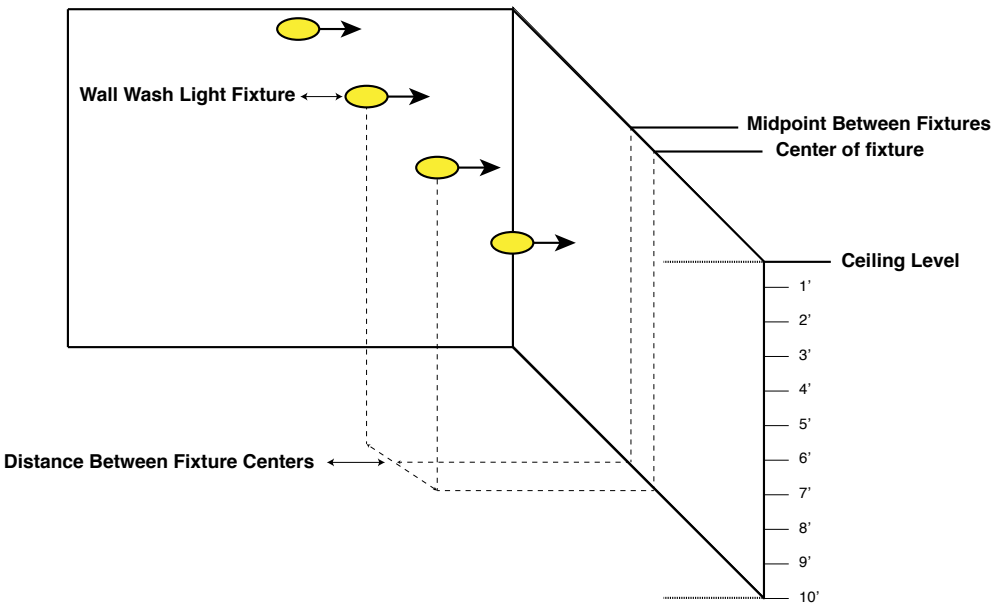

PHOTOMETRIC DATA CHARTS

FOOT CANDLE MEASUREMENT WARM DIM WALL WASH 30LM, 97CRI, 3000K																		
Mounting Distance	2' from wall						3' from wall						4' from wall					
Fixture Spacing	2' on center		3' on center		4' on center		2' on center		3' on center		4' on center		3' on center		4' on center		6' on center	
Distance from Ceiling	Center	Mid Point	Center	Mid Point	Center	Mid Point	Center	Mid Point	Center	Mid Point	Center	Mid Point	Center	Mid Point	Center	Mid Point	Center	Mid Point
1'	22	22	16	16	13	9	12	12	9	9	7	6	7	7	5	5	3	3
2'	67	67	46	46	38	29	30	30	21	21	16	15	13	13	10	10	6	5
3'	97	97	66	66	52	46	54	54	37	37	28	27	21	21	16	16	11	9
4'	87	87	59	59	45	43	67	66	45	45	34	34	31	31	23	23	15	14
5'	69	69	47	47	36	35	66	65	45	45	33	33	36	36	27	27	17	17
6'	54	54	37	37	28	27	58	57	40	40	30	30	36	36	27	27	17	17
7'	44	43	30	30	22	22	50	49	35	35	26	26	34	34	25	25	16	16
8'	36	35	25	25	19	19	43	43	30	30	22	22	31	31	23	23	15	15
9'	32	30	22	22	17	16	38	37	27	26	20	19	29	28	21	21	14	13
10'	25	24	18	17	13	13	31	30	22	21	17	16	24	24	18	17	11	11

NOTE

1. Performance based on typical reflectance values and room dimensions. IES files available at ledrabrands.com

100135

alphabet

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

PHOTOMETRIC DATA CHARTS

FOOT CANDLE MEASUREMENT WARM DIM WALL WASH 20LM, 97CRI, 3000K

Mounting Distance	2' from wall						3' from wall						4' from wall					
Fixture Spacing	2' on center		3' on center		4' on center		2' on center		3' on center		4' on center		3' on center		4' on center		6' on center	
Distance from Ceiling	Center	Mid Point	Center	Mid Point	Center	Mid Point	Center	Mid Point	Center	Mid Point	Center	Mid Point	Center	Mid Point	Center	Mid Point	Center	Mid Point
1'	14	14	10	10	8	6	8	8	6	6	5	4	5	5	4	4	2	2
2'	40	40	27	27	22	18	18	18	13	13	9	9	8	8	6	6	4	4
3'	62	61	41	41	32	30	32	32	22	22	16	17	13	13	9	10	6	6
4'	58	57	39	39	29	29	42	42	28	28	21	22	19	19	14	14	9	9
5'	47	47	32	32	24	24	43	42	29	29	22	22	22	22	17	17	11	11
6'	38	37	26	26	19	19	39	38	27	27	20	20	23	23	17	17	11	11
7'	31	30	21	21	16	16	34	34	24	24	18	18	23	22	17	17	11	11
8'	26	25	18	18	13	13	30	30	21	21	15	15	21	21	16	16	10	10
9'	22	22	16	15	12	11	27	26	19	18	14	14	20	19	15	14	9	9
10'	18	17	13	12	9	9	22	21	16	15	12	11	17	16	12	12	8	8

FOOT CANDLE MEASUREMENT WARM DIM WALL WASH 13LM, 97CRI, 3000K

Mounting Distance	2' from wall						3' from wall						4' from wall					
Fixture Spacing	2' on center		3' on center		4' on center		2' on center		3' on center		4' on center		3' on center		4' on center		6' on center	
Distance from Ceiling	Center	Mid Point	Center	Mid Point	Center	Mid Point	Center	Mid Point	Center	Mid Point	Center	Mid Point	Center	Mid Point	Center	Mid Point	Center	Mid Point
1'	1'	8	8	6	6	5	4	5	5	4	4	3	3	3	3	2	2	1
2'	2'	25	25	17	17	14	12	11	11	8	8	6	6	5	5	4	4	2
3'	3'	40	39	26	26	20	20	20	20	14	14	10	11	8	8	6	6	4
4'	4'	38	37	25	25	19	19	27	27	18	18	13	14	12	12	8	9	5
5'	5'	31	31	21	21	16	16	28	27	19	19	14	14	14	14	10	11	7
6'	6'	25	25	17	17	13	13	25	25	17	17	13	13	15	15	11	11	7
7'	7'	20	20	14	14	10	10	22	22	16	15	11	12	15	14	11	11	7
8'	8'	17	16	12	12	9	9	20	19	14	14	10	10	14	14	10	10	6
9'	9'	15	14	10	10	8	7	18	17	12	12	9	9	13	13	9	9	6
10'	10'	12	11	8	8	6	6	15	14	10	10	8	7	11	11	8	8	5

FOOT CANDLE MEASUREMENT WARM DIM WALL WASH 10LM, 97CRI, 3000K

Mounting Distance	2' from wall						3' from wall						4' from wall					
Fixture Spacing	2' on center		3' on center		4' on center		2' on center		3' on center		4' on center		3' on center		4' on center		6' on center	
Distance from Ceiling	Center	Mid Point	Center	Mid Point	Center	Mid Point	Center	Mid Point	Center	Mid Point	Center	Mid Point	Center	Mid Point	Center	Mid Point	Center	Mid Point
1'	7	7	5	5	4	3	4	4	3	3	2	2	2	2	2	2	1	1
2'	21	21	15	15	12	9	10	10	7	7	5	5	4	4	3	3	2	2
3'	32	32	21	21	17	15	17	17	12	12	9	9	7	7	5	5	3	3
4'	29	29	19	20	15	14	22	22	15	15	11	11	10	10	7	7	5	5
5'	23	23	16	16	12	12	22	21	15	15	11	11	12	12	9	9	6	5
6'	18	18	13	13	9	9	19	19	13	13	10	10	12	12	9	9	6	6
7'	15	15	10	10	8	7	17	17	12	12	9	9	11	11	8	8	5	5
8'	12	12	9	8	6	6	15	14	10	10	8	7	10	10	8	8	5	5
9'	11	10	8	7	6	5	13	13	9	9	7	6	10	9	7	7	5	4
10'	9	8	6	6	4	4	11	10	8	7	6	5	8	8	6	6	4	4

NOTE

1. Performance based on typical reflectance values and room dimensions. IES files available at ledrabrands.com


alphabet

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

MOUNTING OPTIONS


FIXTURE HEIGHT

10LM - 20LM CONFIGURATION

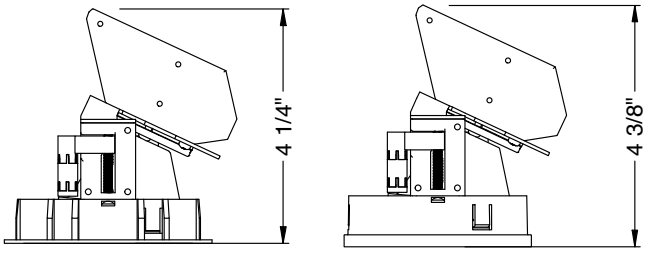

TRIMMED | TRIMLESS & MILLWORK


30LM CONFIGURATION

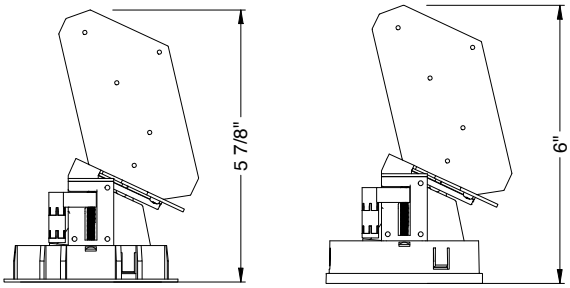


TRIMMED | TRIMLESS & MILLWORK


NC - NEW CONSTRUCTION

TRIM

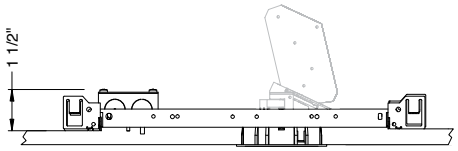

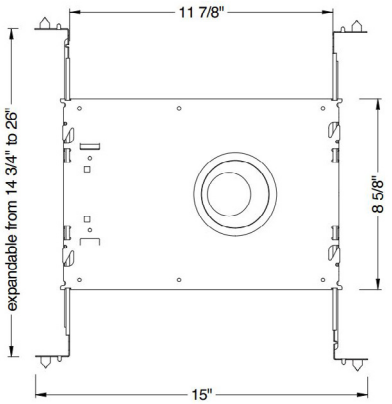


TRIM





ceiling cutout
3-3/8" diameter

ceiling thickness
1/8" to 5/8"




TRIMLESS

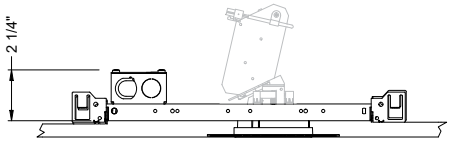

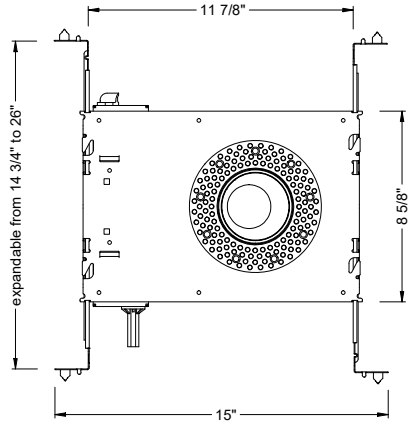


TRIMLESS




ceiling cutout
3-1/2" diameter

ceiling thickness
3/8" to 5/8"




TRIMLESS/MILLWORK



ceiling cutout
3-1/2" diameter

ceiling thickness
1/2" to 5/8"



100135


In a continuing effort to offer the best product possible we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product.

alphabet


PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			


MOUNTING OPTIONS

RET - RETRO
TRIM/TRIMLESS

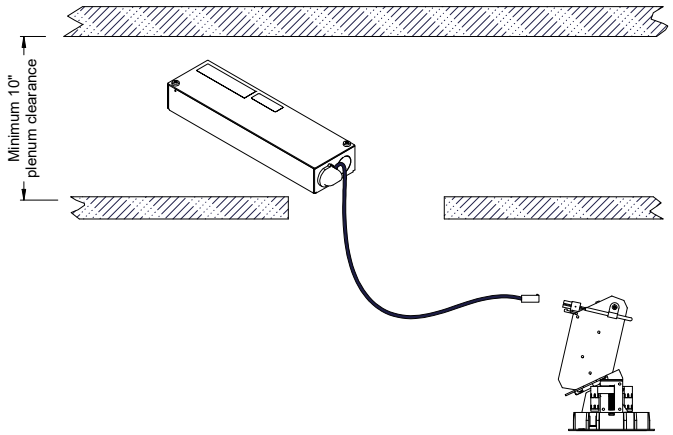

IC - INSULATION CONTACT HOUSING
ICAT - INSULATION CONTACT / AIR TIGHT
CP - CHICAGO PLENUM





BOX SIZE	L 1	L 2	W	H
A	15-7/16"	11-3/4"	8-1/2"	6-3/4"

RATINGS / CERTIFICATIONS	NC	RET	IC	ICAT	CP
TYPE NON-IC	✔	✔			
TYPE IC			✔	✔	✔
CHICAGO PLENUM (CCEA)					✔
SUITABLE FOR AIR HANDLING PLENUMS	✔	✔	✔	✔	✔
REDUCED AIRFLOW (WITH LENS) ASTM E283	✔	✔	✔	✔	✔

CEILING THICKNESS	
FIXTURE TYPE	MOUNTING TYPE
	NC, RET, IC, ICAT,CP
	STANDARD CEILING THICKNESS
TRIM	1/8" to 5/8"
TRIMLESS	3/8" to 5/8"
MILLWORK (TRIMLESS)	1/2" to 5/8"

BOX TYPE / LUMEN OUTPUT - STANDARD BEAMS (WW)			
LUMEN OUTPUT	BOX - A		
	CP	IC	ICAT
10LM	✔	✔	✔
13LM	✔	✔	✔
20LM			
30LM			

alphabet

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

BATTERY OPTIONS

EMERGENCY BATTERY

IOTA's ILB Battery Backups are UL Listed LED emergency drivers that allow the same LED fixture to be used for both normal and emergency operation. In the event of a power failure, the ILB switches to the emergency mode and operates the existing fixture for 90 minutes. The unit contains a battery, charger, and converter circuit in a single can. The Constant Power design of the ILB maintains the output wattage to the LED array even as the system voltage diminishes. UL 924 Listed for U.S. and Canada. UL 1310 Certified, Output Class 2 Compliant. Includes single-piece TBTS test switch and charge indicator accessory kit. For use with switched and unswitched fixtures, and includes Two-wire universal AC input. Meets or exceeds all National Electric Code and Life Safety Code Emergency Lighting Requirements. Rated for use in Plenum, Damp Location, Recessed Type IC, and Enclosed and Gasketed Luminares.

REMOTE TEST SWITCH


The Remote Test Switch may be mounted adjacent to the LED Fixture by others.

EMERGENCY BATTERY ACCESS

Above ceiling access is required for service. An access panel in the ceiling (or other form of access) adjacent to the installation location of the Emergency Battery is required.

REMOTE LOCATION


Maximum remote mounting distance of the emergency driver shall be 50 feet. Remote location wiring provided by others. Follow all Local and National Electric/ Building Codes.




Remote Test Switch

EM MODE OUTPUT (DELIVERED LUMENS)			
LUMEN ORDERING CODE	EM7	EM10	EM12
ALL OPTIONS (10LM TO 30LM)	440lm	500lm	580lm
Notes: Based on 30K, 97CRI			


NC - NEW CONSTRUCTION
WITH EM BATTERY (REMOTE TEST SWITCH)

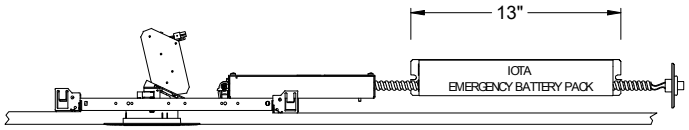

IC / ICAT / CP - INSULATION CONTACT HOUSING
WITH EM BATTERY (REMOTE TEST SWITCH)

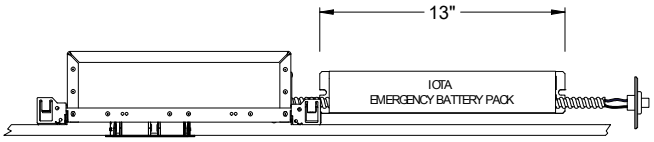


RET - RETROFIT
WITH EM BATTERY (REMOTE TEST SWITCH)

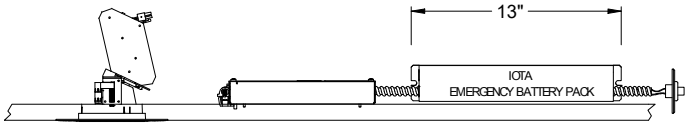

Accessory

76066 Optional T-Grid Mounting Kit[1]

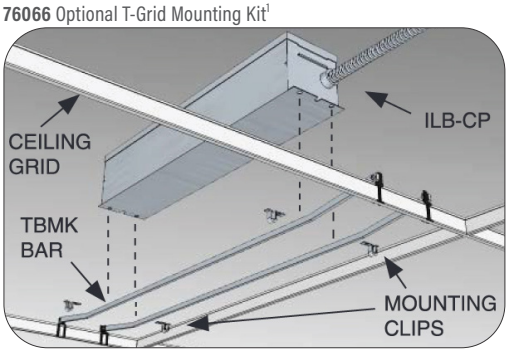

1. Can be used with any of the Emergency Battery Backups. Must be ordered as a separate line item.

In a continuing effort to offer the best product possible we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product.