
alphabet


PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

NU4 LOPRO


4" Square Adjustable Standard White

NSF · AT airtight · DF dead-front · PR plenum rated · wet rated

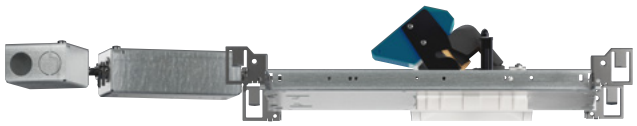



Trim



Trimless



Trimless Millwork

20° - 55° BEAM (Note: Specifications are subject to change without notice)		
9mm COB PERFORMANCE DATA		
LED LIGHT ENGINE	NOMINAL DELIVERED LUMENS	SYSTEM WATTAGE
10LM	880LM @30K/80CRI	9W
15LM	1280LM @30K/80CRI	13W
20LM	1670LM @30K/80CRI	17W
25LM	2020LM @30K/80CRI	22W
30LM	2410LM @30K/80CRI	27W
10LM	740LM @30K/90CRI	9W
15LM	1080LM @30K/90CRI	13W
20LM	1410LM @30K/90CRI	17W
25LM	1710LM @30K/90CRI	22W
30LM	2030LM @30K/90CRI	27W
Notes	Delivered lumens based on 35D optic with no lens, (see page 2)	

15° BEAM (Note: Specifications are subject to change without notice)		
6mm COB PERFORMANCE DATA		
LED LIGHT ENGINE	NOMINAL DELIVERED LUMENS	SYSTEM WATTAGE
10LM	870LM @30K/80CRI	11W
15LM	1220LM @30K/80CRI	19W
10LM	730LM @30K/90CRI	11W
15LM	1025LM @30K/90CRI	19W
Notes	Delivered lumens based on 15D optic with no lens, (see page 2)	

9.5° BEAM (Note: Specifications are subject to change without notice)		
4.5mm COB PERFORMANCE DATA		
LED LIGHT ENGINE	NOMINAL DELIVERED LUMENS	SYSTEM WATTAGE
10LM	705LM @30K/80CRI	17.5W
10LM	595LM @30K/90CRI	17.5W
Notes	Delivered lumens based on 9D optic with SBL lens, (see page 2)	

FEATURES

- True 40° Tilt with <5% beam disruption (clipping)
- Zero ceiling line obstruction at Full Tilt
- Concentric Tilt Tracking ensures minimal light loss
- Double jointed driver box allows for 4" shallow plenum installation
- 1/16" micro flange
- 9° - 55° optical beam control
- UGR <5
- Multiple mounting, glare control options, trims, and finishes available

DIMMING AND CONTROLS

- 0-10V dimming to 1%
- leading & trailing edge (Triac / ELV) dimming to 1%

CONSTRUCTION

- Shatter proof acrylic bezel lens
- Lexan™ (PC) Optimized for wireless signal controls
- Impact and chemical resistant at the highest level
- Withstands temperatures up to 240°F
- Electrocoated 16-gauge cold-rolled steel construction
- Accommodates ceiling thickness from Standard 0.3" to 1.1" and Thick Ceiling 1.0" to 2.0
- Fixture is pre-set and shipped at 20deg tilt

LED

- 90 CRI: SDCM = 2-step MacAdam Ellipse, Lumen Maintenance: L_{70} > 66,000 hrs
- 80 CRI: SDCM = 2-step MacAdam Ellipse, Lumen Maintenance: L_{70} > 66,000 hrs


LISTING

- ULus Listed to UL1598 & UL2108; cUL Listed to CSA C22.2 #250.0
- IP65 with lens - Suitable for wet locations with lens - Suitable for damp locations without lens
- Non-conductive, dead-front construction (shower approved)
- NSF/ANSI-2 with lens (Non-Food and Splash Zones)
- **Declare.** - LBC Red List Approved
- 5 Year Limited warranty


ELECTRICAL

- 120V-277V, 120 only Triac / ELV
- Power factor ≥ 0.9
- 2kV driver input surge protection
- Remote emergency test switch
- 7W, 10W (T20 CEC) and 12W EM 90min battery
- Max. ambient installation temperature 95°F (35°C)


FIXTURE HEIGHT

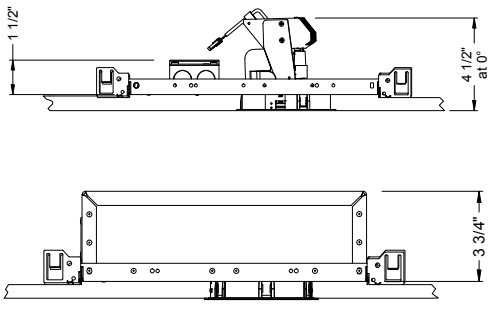


TRIMMED

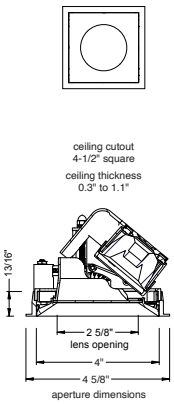

TRIMLESS

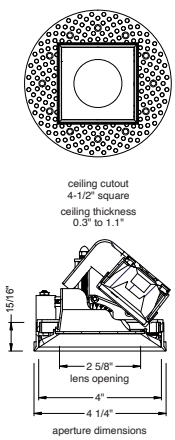

MILLWORK

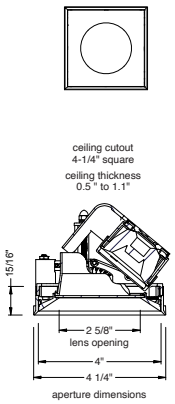

101005

alphabet

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

9°- 55° BEAM ORDERING CODE

SERIES	**NU4**	
TYPE	**QALP**	square adjustable, lopro
	QATLP	square adjustable, trimless, lopro
	QATMWLP	square adjustable, trimless millwork, lopro
LED	**SW**	standard white
DELIVERED LUMENS	**10LM**	880 lm
	15LM	1280 lm
	20LM	1670 lm
	25LM	2020 lm
	30LM	2410 lm
	Standard Configuration: 3000K 80CRI 35D NL **Calculated Delivered Lumens =** [Delivered Lumen Value] x [CCT Multiplier] x [Optic Multiplier] x [Lens Multiplier]	
CCT	**27K**	2700K
	30K	3000K
	35K	3500K
	40K	4000K

CCT	2700K		3000K		3500K		4000K	
CRI	80+	90+	80+	90+	80+	90+	80+	90+
CCT MULTIPLIER FOR LUMEN OUTPUT	0.96	0.81	1.00	0.85	1.03	0.88	1.06	0.91

CRI	**80**	80 CRI	
	90	90 CRI	
OPTIC & LM MULTIPLIER SEE PAGE 3	**9D**[1]	9.5 degrees	(0.80)
	15D[2]	15 degrees	(1.05)
	20D	20 degrees	(0.93)
	25D	25 degrees	(0.96)
	35D	35 degrees	(1.00)
	55D	55 degrees	(0.97)
TIR OPTIC ACCESSORY SEE PAGE 3	**NA**	no accessory	(1.00)
	HCL	honeycomb louver	(0.85)
	HETA[3]	high efficiency textured lens, similar to Solite™	(0.90)
	Attached to TIR optic, field replaceable.		
BEZEL LENS SEE PAGE 3	**NL**	no lens	(1.00)
	CL	clear lens	(0.98)
	DL	diffused lens	(0.91)
	HET	high efficiency textured lens, similar to Solite™	(0.92)
	SBL	smoothing beam lens	(0.92)
TRIM COLOR SEE PAGE 3	**BK**	black	
	WH	white	
	MC	matte chrome	
	BZ	bronze	
	WT	wheat	
	Not applicable to trimless option. Do not include in trimless ordering code.		
BEZEL COLOR SEE PAGE 3	**BK**	black	(0.98)
	WH	white	(1.00)
	MC	matte chrome	(0.99)
	BZ	bronze	(0.98)
	WT	wheat	(0.99)

9°- 55° BEAM ORDERING CODE

MOUNTING OPTIONS SEE PAGE 6, 7	**NC**	new construction with ceiling fitting plate
	IC[5]	insulation contact housing
	RET	retrofit, no ceiling fitting plate
VOLTAGE	**120**	120V
	UNV	120V-277V
DIMMING	**DIM10**	eldoLED flicker free 0-10V dimming to 1%
	ELV1[6]	leading & trailing edge (Triac/ELV) dimming to 1%
ELECTRICAL OPTIONS	**EM7**	emergency battery backup, 90 minutes at 7W to LED
	EM12[7]	emergency battery backup, 90 minutes at 12W to LED
	EM10CA20	remote emergency battery backup, 90 minutes at 10W to LED, CA title 20
SPECIAL SEE PAGE 7	**TC**	thick ceiling application

ADDITIONAL MOUNTING INFO

New Construction Bar Hangers (included)	Mounting Length: 14-3/4" to 26"
Extension Kit p/n: K20266 (ordered separately, 1 per fixture)	*Extends a pair of Bar Hangers* Total Mounting Length: 29" to 48"

YOUR COMPLETED ORDERING CODE

Follow the steps to specify your fixture, example:

NU4 - QALP - SW - 20LM - 35K - 90 - 35D - NA - HET - WH - WH - NC - UNV - DIM10 - EM7 - TC

NOTES


1. 9D available in 10LM.
2. 15D available in 10LM, 15LM. Not available with DL lens options.
3. Elliptical lens not available with 9D and 15D optics. Actual beam distributions for optic [20D= 35° x 60°, 25D= 40° x 65°, 35D= 45° x 70°, 55D= 55° x 80°].
4. NL option does not meet requirement for AT/DF/WET/NSF.
5. IC not available for 9D/10LM or 25LM/30LM.
6. ELV1 available in 120V.
7. EM12 not available 10LM/15LM.

alphabet


PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

TRIM OPTIONS

TRIM/BEZEL COLORS



WH



MC



BK



BZ




WT

OPTICAL OPTIONS

- UGR calculation based on CIE 117-1995; room size: 4H X 8H, reflectance: 70/50/20;
- UGR calculation based on 15LM fixtures, unless otherwise noted.

TIR OPTIC ACCESSORY
Honeycomb Louver



OPTIC	BEAM ANGLE	UGR
20D	16.9	≤5
25D	22.5	≤5
35D	28.5	≤5
55D	45.9	10.5

NL
No Lens



OPTIC	BEAM ANGLE	UGR
15D	13.6	≤5
20D	18.3	≤5
25D	23.9	≤5
35D	30.8	≤5
55D	51.1	13.1

CL
Clear Lens




OPTIC	BEAM ANGLE	UGR
15D	13.7	≤5
20D	20.1	≤5
25D	25.5	≤5
35D	34.4	7.5
55D	52.9	14

DL
Diffused Lens



OPTIC	BEAM ANGLE	UGR
20D	38.3	15.7
25D	41.5	17.2
35D	45	18.2
55D	57.8	20.9

HET
High Efficiency Textured Lens



OPTIC	BEAM ANGLE	UGR
20D	24.9	≤5
25D	28.7	8.8
35D	34	9.9
55D	51.6	15.7

SBL
Smoothing Beam Lens



OPTIC	BEAM ANGLE	UGR
9D*	9.5	8.2
15D	17	≤5
20D	21	≤5
25D	26.5	6.3
35D	33.3	8.1
55D	52.8	14.8

* UGR Calculation based on 10LM for 9D.


GLARE CONTROL

CUT-OFF ANGLE

Visual comfort is achieved with a lower cut-off angle due to improved glare control. The smaller the cut-off angle, the easier it is on the eye.

Alphabet downlights have been thoughtfully engineered to eliminate glare while still delivering functional illumination.

- Cutoff angle of NL and CL is 45.5 degrees;

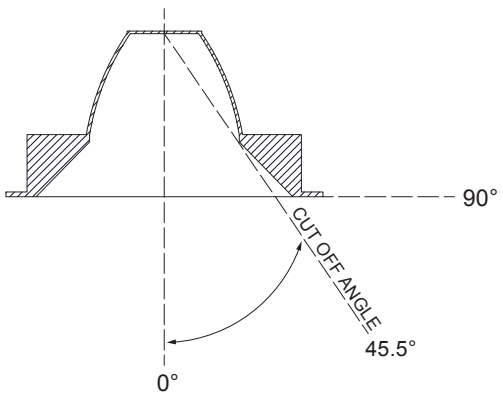

In a continuing effort to offer the best product possible we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product.


alphabet

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

PHOTOMETRIC DATA

20LM CCT MULTIPLIERS		
	80CRI	90CRI
2700K	0.96	0.81
3000K	1	0.85
3500K	1.03	0.88
4000K	1.06	0.91
FC Formula = CBCP / Distance^2		


20D 18.3° NO LENS



WATTS: 16.5	LPW: 93.7
LUMENS: 1546	CCT: 3000K

INTENSITY	
DEGREE	CANDELA
0	10726
5	8677
15	2327
25	320
35	24.5
45	2.4


25D 23.9° NO LENS



WATTS: 16.5	LPW: 97.2
LUMENS: 1605	CCT: 3000K

INTENSITY	
DEGREE	CANDELA
0	7715
5	6746
15	2644
25	490
35	55
45	6.7


35D 30.8° NO LENS



WATTS: 16.5	LPW: 101.3
LUMENS: 1671	CCT: 3000K

INTENSITY	
DEGREE	CANDELA
0	5659
5	5301
15	2948
25	721
35	47.8
45	7.3

55D 51.1° NO LENS




WATTS: 16.5	LPW: 97.8
LUMENS: 1614	CCT: 3000K

INTENSITY	
DEGREE	CANDELA
0	2411
5	2424
15	2176
25	1296
35	268
45	15.4

40LM CCT MULTIPLIERS		
	80CRI	90CRI
2700K	0.96	0.81
3000K	1	0.85
3500K	1.03	0.88
4000K	1.06	0.91
FC Formula = CBCP / Distance^2		


20D 18.3° NO LENS



WATTS: 38.5	LPW: 76.3
LUMENS: 2938	CCT: 3000K

INTENSITY	
DEGREE	CANDELA
0	20378
5	16485
15	4420
25	609
35	46.5
45	4.6


25D 23.9° NO LENS



WATTS: 38.5	LPW: 79.2
LUMENS: 3048	CCT: 3000K

INTENSITY	
DEGREE	CANDELA
0	14657
5	12815
15	5023
25	932
35	105
45	12.8


35D 30.8° NO LENS



WATTS: 38.5	LPW: 82.5
LUMENS: 3174	CCT: 3000K

INTENSITY	
DEGREE	CANDELA
0	10750
5	10071
15	5600
25	1369
35	90.8
45	13.8

55D 51.1° NO LENS



WATTS: 38.5	LPW: 79.7
LUMENS: 3067	CCT: 3000K

INTENSITY	
DEGREE	CANDELA
0	4581
5	4605
15	4134
25	2462
35	510
45	29.2


alphabet

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

PHOTOMETRIC DATA

10LM CCT MULTIPLIERS		
	80CRI	90CRI
2700K	0.96	0.81
3000K	1	0.85
3500K	1.03	0.88
4000K	1.06	0.91
FC Formula = CBCP / Distance^2		


15D
13.5° NO LENS



WATTS: 11.5	LPW: 75.4
LUMENS: 868	CCT: 3000K

INTENSITY	
DEGREE	CANDELA
0	10779
5	7316
15	942
25	53.6
35	6.2
45	0.7

9D
9.5 ° SMOOTHING BEAM LENS




WATTS: 17.1	LPW: 40.4
LUMENS: 692	CCT: 3000K

INTENSITY	
DEGREE	CANDELA
0	14002
5	6549
15	392
25	146
35	53.2
45	15.8

20LM CCT MULTIPLIERS		
	80CRI	90CRI
2700K	0.96	0.81
3000K	1	0.85
3500K	1.03	0.88
4000K	1.06	0.91
FC Formula = CBCP / Distance^2		

15D
13.5° NO LENS



WATTS: 30.5	LPW: 50.8
LUMENS: 1549	CCT: 3000K


INTENSITY	
DEGREE	CANDELA
0	19249
5	13063
15	1682
25	95.6
35	11
45	1.3

alphabet


PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

MOUNTING OPTIONS

FIXTURE HEIGHT

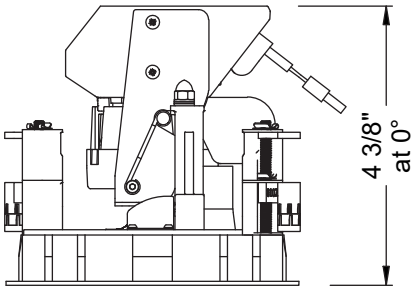


TRIMMED

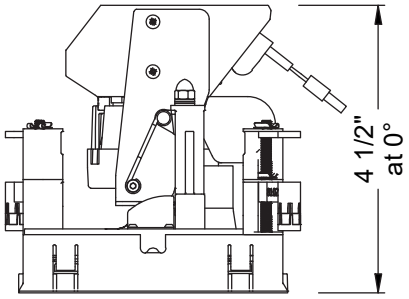


TRIMLESS & MILLWORK

NC - NEW CONSTRUCTION


TRIM

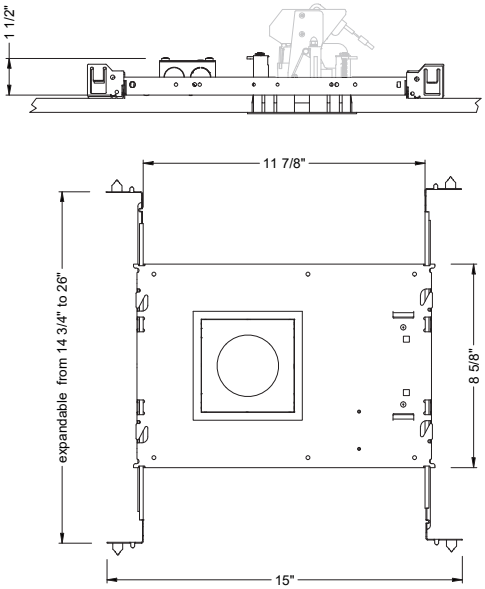


TRIM

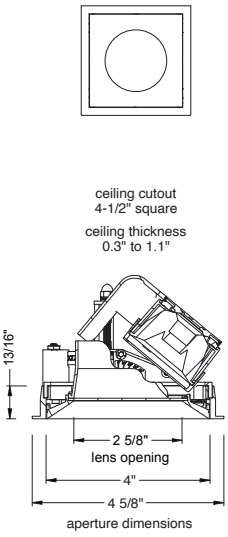


TRIMLESS

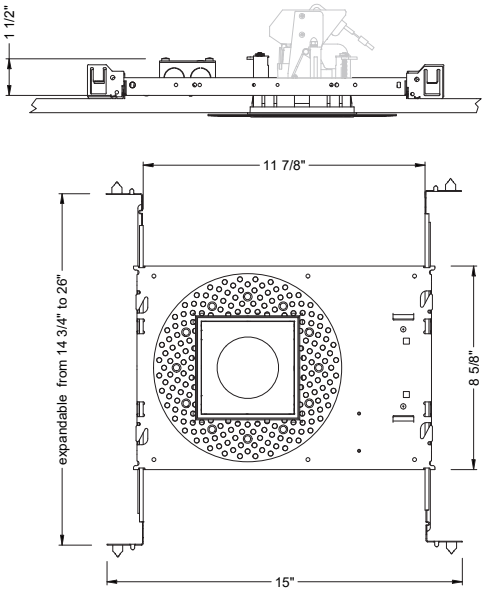

TRIMLESS

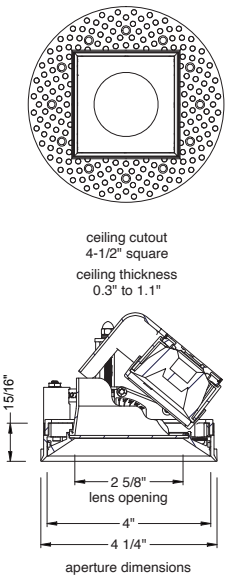

TRIMLESS/MILLWORK

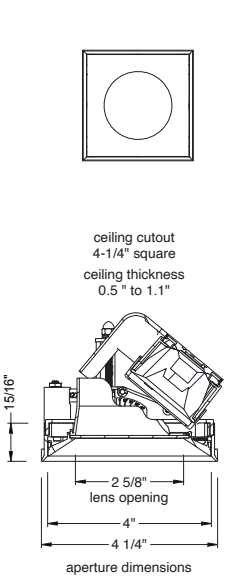


alphabet

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

MOUNTING OPTIONS (CONTINUED)


RET - RETRO
TRIM/TRIMLESS

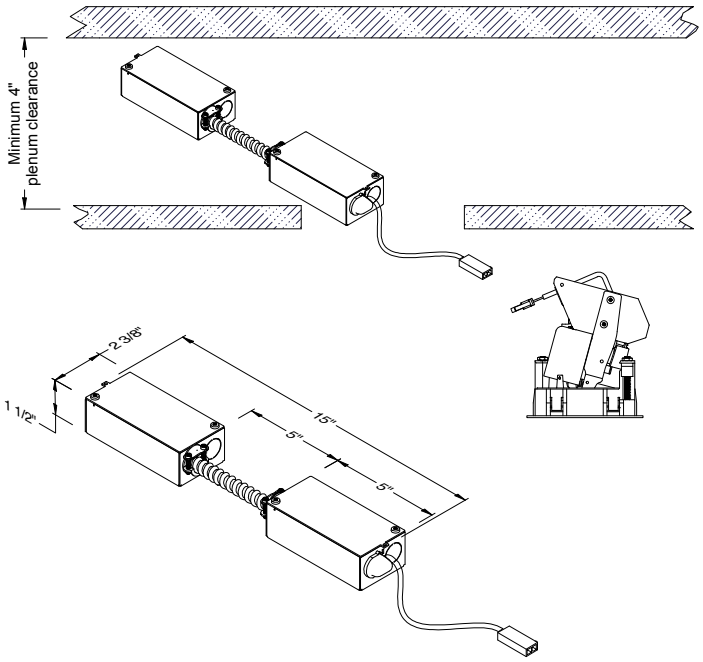

RATINGS / CERTIFICATIONS	NC	RET	IC
TYPE NON-IC	✔	✔	
TYPE IC			✔
CHICAGO PLENUM (CCEA)			
SUITABLE FOR AIR HANDLING PLENUMS	✔	✔	✔
REDUCED AIRFLOW (WITH LENS) ASTM E283	✔	✔	✔


CEILING THICKNESS		
FIXTURE TYPE	MOUNTING TYPE	
	NC, RET	IC
	STANDARD CEILING THICKNESS	
TRIM	0.3" to 1.1"	0.625" to 1.1"
TRIMLESS	0.3" to 1.1"	0.625" to 1.1"
MILLWORK (TRIMLESS)	0.5" to 1.1"	0.625" to 1.1"

TC - THICK CEILING (1" TO 2") APPLICATION
TRIM/TRIMLESS

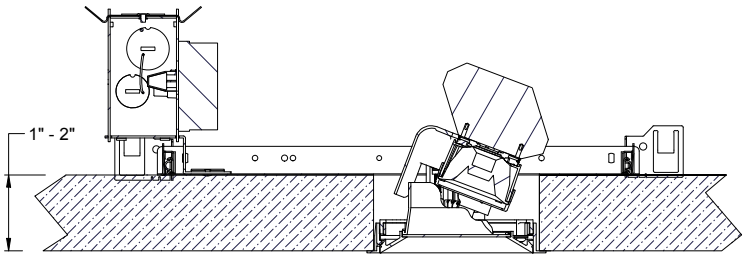

THICK CEILING FIXTURE INFO		
TILT	ROTATION	CEILING THICKNESS
0° - 20°	360°	UP TO 2"
20° - 30°	160°	UP TO 2"
30° - 40°	160°	UP TO 1.625"

IC - INSULATION CONTACT HOUSING

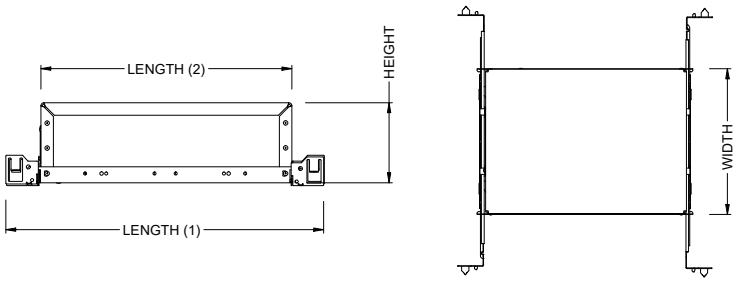

BOX SIZE	L 1	L 2	W	H
A	15 - 7/16"	11 - 3/4"	8 - 1/2"	3 - 3/4"

BOX TYPE / LUMEN OUTPUT - NARROW BEAM (9°)	
LUMEN OUTPUT	BOX - A
	IC
10LM	

BOX TYPE / LUMEN OUTPUT - NARROW BEAM (15°)	
LUMEN OUTPUT	BOX - A
	IC
10LM	✔
15LM	✔
20LM	

BOX TYPE / LUMEN OUTPUT - STANDARD BEAMS (25° - 55°)	
LUMEN OUTPUT	BOX - A
	IC
10LM	✔
15LM	✔
20LM	✔
25LM	✔
30LM	

alphabet

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

BATTERY OPTIONS

EMERGENCY BATTERY

IOTA's ILB Battery Backups are UL Listed LED emergency drivers that allow the same LED fixture to be used for both normal and emergency operation. In the event of a power failure, the ILB switches to the emergency mode and operates the existing fixture for 90 minutes. The unit contains a battery, charger, and converter circuit in a single can. The Constant Power design of the ILB maintains the output wattage to the LED array even as the system voltage diminishes. UL 924 Listed for U.S. and Canada. UL 1310 Certified, Output Class 2 Compliant. Includes single-piece TBTS test switch and charge indicator accessory kit. For use with switched and unswitched fixtures, and includes Two-wire universal AC input. Meets or exceeds all National Electric Code and Life Safety Code Emergency Lighting Requirements. Rated for use in Plenum, Damp Location, Recessed Type IC, and Enclosed and Gasketed Luminares.

REMOTE TEST SWITCH


The Remote Test Switch may be mounted adjacent to the LED Fixture by others.

EMERGENCY BATTERY ACCESS

Above ceiling access is recommended for ease of service, but LED Fixture Sizes of 4" and Larger are capable of below ceiling access. IC/ICAT/CP Box and ITS option require an access panel in the ceiling (or other form of access) adjacent to the installation location of the Emergency Battery.

REMOTE LOCATION


Maximum remote mounting distance of the emergency driver shall be 50 feet. Remote location wiring provided by others. Follow all Local and National Electric/ Building Codes.




Remote Test Switch

EM MODE OUTPUT (DELIVERED LUMENS)			
LUMEN ORDERING CODE	EM7	EM10	EM12
ALL OPTIONS (10LM TO 40LM)	615LM	880LM	1055LM
Notes: Based on 30K, 80CRI			

NC - NEW CONSTRUCTION
WITH EM BATTERY (REMOTE TEST SWITCH)

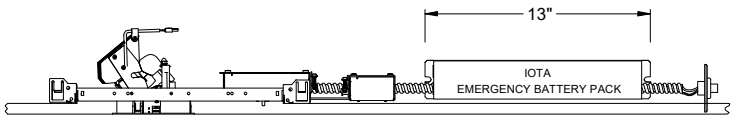


IC - INSULATION CONTACT HOUSING
WITH EM BATTERY (REMOTE TEST SWITCH)



Accessory

76066 Optional T-Grid Mounting Kit[1]

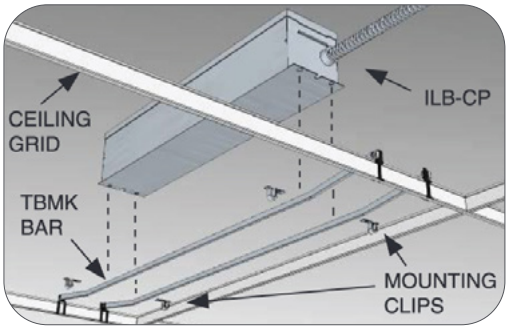

1. Can be used with any of the Emergency Battery Backups. Must be ordered as a separate line item.

In a continuing effort to offer the best product possible we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product.