prescolite

DATE: LOCATION:

TYPE: PROJECT:

CATALOG #:

LFR-6RDS

LITEFRAME 6" ROUND SHALLOW DOWNLIGHT

LITEFRAME 2.0



FEATURES

- 6" LED shallow downlight delivering 1000–3000 lumens
- Direct Install from below ceiling for New Construction or Remodel applications
- Optional housing accessories available
- Four beam distributions
- 2700K–5000K, 90+ CRI (2 SDCM)
- Dimming protocols include 0–10V, Phase (Forward/Reverse), DALI, DMX, and Lutron EcoSystem
- NX Lighting Controls wired and wireless controls capability available


SERVICE PROGRAMS

STOCK QS10

C US TriGain® technology

CONTROLS TECHNOLOGY

NX WIRELESS NX WIRED



Typical Dimensions and Weights			
Lumen Package	"A" Diameter Inches (mm)	"B" Height Inches (mm)	Weight Lbs (kg)
10L–30L	7.13 (181)	3.56 (90)	4 (1.8)

See DIMENSIONS section for complete details

SPECIFICATIONS

CONSTRUCTION

- Standard Fixture Module designed for Non-IC, Direct Install construction
- Optional Non-IC frame or IC housing available with pre-installed bar hangers
- Die cast aluminum fixture module support ring with spring steel clips for secure mounting to ceiling
- Driver J-Box can be installed and accessed from below the ceiling as direct install or easily snap on to optional housing frame/enclosure
- Light Engine connections use plenum rated (CMP) cable

OPTICS

- High purity spun aluminum reflector, self-flanged
- 61° visual cutoff to source image and 45° cutoff to source
- Specular or Semi-Specular anodized or White painted cone reflector finish/colors
- Painted flange options in White or Black

ELECTRICAL

- Chip-on-board LED with 2 SDCM
- Multiple CCTs, TriGain technology 90+ CRI
- Long LED life: L90 at >50,000 hours (TM-21)
- Universal voltage 120–277V driver, 347V optional
- UL Class 2, inherent short circuit and overload protection
- Flicker-free dimming options in a wide range of protocols from 1% to <0.1% performance
- 0–10V, Phase (Forward/Reverse), DALI, DMX, and Lutron EcoSystem options
- NX Lighting Controls provides options for standalone and networked functionality with wired or wireless connectivity for NX system deployments
- Remote emergency battery option available
- Current's patented TriGain® phosphor delivers 90 CRI color quality at 80 CRI efficacy

INSTALLATION

- Accommodates ceiling thickness from 0.50" to 2.50"
- Fixture Module including driver fully accessible from above or below the ceiling
- 10L–15L Fixture Modules are inherently protected IC without the use of IC housing enclosure. (IC housing is still recommended when using loose-fill or spray foam insulation types.)

CERTIFICATIONS

- cCSAus certified to UL 1598
- For 30L: Marked spacing required 36" fixture center to center; 18" fixture center to building member; 0.5" above fixture
- Suitable for damp locations
- EMR: Certified under UL 924 standard for emergency lighting and power equipment
- EMR: Emergency battery packs are California Energy Commission (CEC) Title 20 Compliant
- Approved for 8 (4 in/4 out) No. 12AWG conductors rated for 90°C through wiring

WARRANTY

- 5 year warranty

KEY DATA	
Lumen Range	1000–3000
Wattage Range	8–29
Efficacy Range (LPW)	108–136
Reported Life (Hours)	L90 / >50,000
Input Current (mA)	66–241 (120V)

*Based on Specular, 35K, 90 CRI

© 2026 HLI Solutions, Inc. All rights reserved. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

prescolite

DATE: LOCATION:

TYPE: PROJECT:

CATALOG #:

LFR-6RDS

LITEFRAME 6" ROUND SHALLOW DOWNLIGHT

Gray Shading = Service Program STOCK QS10 Limit of 150 Luminaries

ORDERING GUIDE

Example: LFR-6RDS-M-10L35K9-WD-DM1 / LFR-6RDS-T-S / LFR-6RD-H

CATALOG #

FIXTURE MODULE

LFR-6RDS-M – [ ] [ ] 9 – [ ] – [ ] [ ] [ ] – [ ]

Ap/Shp/Funct	Lumen Output	CCT	CRI	Distribution	Driver Options	Control Options	Voltage	Module Options
LFR-6RDS-M 6" Round Shallow Downlight Fixture Module for Direct Install *(Non-IC frame or IC housing available under Housing Options below)*	**10L** 1000 **15L** 1500 **20L** 2000 **25L** 2500 **30L** 3000 [1]	**27K** 2700K **30K** 3000K **35K** 3500K **40K** 4000K **50K** 5000K	**9** 90+	**VNR** Very Narrow (19°/0.3 SC) **NR** Narrow (25°/0.4 SC) **MD** Medium (34°/0.6 SC) **WD** Wide (55°/0.8 SC)	**DM1** 0–10V Dimming to 1% **DM01** 0–10V Dimming to < 1% **PDM** Phase (Forward/Reverse) Dimming to 1% **DMX** DMX with RDM dimming to < 0.1% **DALI** DALI Dimming to 1% **EDM** Lutron Hi-Lume EcoSystem Dimming to 1% [2]	**NX Lighting Controls** Networked Wireless **NXW** NX Networked Wireless Radio Module NXRM2 and Bluetooth Programming, without Sensor [3] Networked Wired **NXE** NX Wired Dual RJ45 SmartPORTS, without Sensor [3]	*Standard 120–277V* **34** 347V [4]	**CP** Chicago Plenum [5, 6] **EMR** 10W Emergency Battery Pack (CEC Title 20 Compliant) with remote test switch and indicator light [6] **DTS** Device Transfer Switch with Dimming Bypass [6, 7]

TRIM (Ships separately)

LFR-6RDS-T –

Aperture/Shape/Function	Reflector Finish/Color	Flange Color Options	Lower Trim Options
LFR-6RDS-T 6" Round Shallow Downlight Trim Assembly	**S** Specular **SS** Semi-Specular **WC** Painted White Cone and Flange	*Standard matches reflector color* **WT** White Flange [8] **BT** Black Flange	**FM** Flush Mount Mud-In Ring [11]

HOUSING OPTIONS (Ships separately)

	Aperture/Shape/Function	
☐	**LFR-6RD-H**	6" Housing Frame, New Construction, Non-IC
☐	**LFR-6RD-H-IC**	6" Housing Enclosure, New Construction, IC Rated [9, 10]

	Accessories	
☐	**LiteGear**	LiteGear® Inverter, 125VA–250VA
☐	**LPS Series**	LightPower Micro-Inverter, 20VA–55VA
☐	**LF-FMR6-R**	Flush Mount Mud-in Ring, 6" [11]
☐	**LF-MOR6-R-WH**	Metal Oversized Ring, 6" Round, White (10.12" outside diameter)
☐	**LFR-SCA6-__**	Sloped Ceiling Adapter, 6" White [12]

Notes:

1 30L requires marked spacing. See line art for more details.
2 EDM available 15L–30L.
3 NX requires DM1 driver option.
4 347V requires DM1 driver option; not available with Controls, DTS, EMR.
5 CP not available with PDM, DMX, Controls.
6 Module options not available in combination.
7 DTS available with DM1, DM01, or DALI.
8 WT not needed for WC.
9 IC available up to 30L; 10L–15L Fixture Modules are inherently protected IC without the use of IC housing enclosure. (IC housing is still recommended when using loose-fill or spray foam insulation types.)
10 IC Housing not for use in combination with Controls or with Module Options CP, EMR, DTS.
11 Flush Mount Flange (FM) requires FMR accessory (sold separately).
12 Specify slope angle 5°–35° in 5° increments. Not available with FM option.

© 2026 HLI Solutions, Inc. All rights reserved. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

prescolite

DATE: LOCATION:

TYPE: PROJECT:

CATALOG #:

LFR-6RDS

LITEFRAME 6" ROUND SHALLOW DOWNLIGHT

NX LIGHTING CONTROLS

	Control Option Ordering Logic & Description		Control Option Functionality								Control Option Components	
			Networkable	Grouping	Scheduling	Occupancy/ Motion	Daylight Harvesting	0-10V Dimming	On/Off Control	Bluetooth App Programming		
NX Wireless	NXW	NX Networked Wireless Radio Module NXRM2 and Bluetooth Programming, without Sensor	✓	✓	✓	-	-	✓	✓	✓		NXRM2-H
NX Wired	NXE	NX Wired Dual RJ45 SmartPORTS, without Sensor	✓	✓	✓	-	-	✓	✓	✓[1]		NXDSP

1 Requires NXBTC, order separately.

NX LIGHTING CONTROLS APP





The NX Lighting Controls App is a free to use mobile application for programming both an NX Lighting Controls System or Standalone Bluetooth Sensors. The mobile app allows you to configure devices, discover and setup wireless enabled luminaires and program your NX system settings.

Android

Apple iOS

PERFORMANCE DATA TABLE

Performance data provided below is for 3500K, 90+ CRI with Specular Clear reflector finish/color

Lumen Package	Nominal Lumens	Distribution	Delivered Lumens	Watts	LPW
10L	1000	Very Narrow	1017	7.7	132
		Narrow	1003	7.7	130
		Medium	1011	7.7	131
		Wide	1047	7.7	136
15L	1500	Very Narrow	1555	12.2	127
		Narrow	1533	12.2	126
		Medium	1546	12.2	127
		Wide	1601	12.2	131
20L	2000	Very Narrow	1989	15.9	125
		Narrow	1961	15.9	123
		Medium	1977	16.2	122
		Wide	2047	15.9	129
25L	2500	Very Narrow	2626	22.5	117
		Narrow	2589	22.5	115
		Medium	2610	22.5	116
		Wide	2702	22.5	120
30L	3000	Very Narrow	3148	28.7	110
		Narrow	3104	28.7	108
		Medium	3129	28.7	109
		Wide	3240	28.7	113

© 2026 HLI Solutions, Inc. All rights reserved. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

DATE: LOCATION:

TYPE: PROJECT:

CATALOG #:


LFR-6RDS

LITEFRAME 6" ROUND SHALLOW DOWNLIGHT

DIMENSIONS

LFR-6RDS-M

Fixture Module consists of Light Engine and Driver J-Box assemblies.
Overall dimensions for each are dependent upon configuration selected.
See the following pages for details.

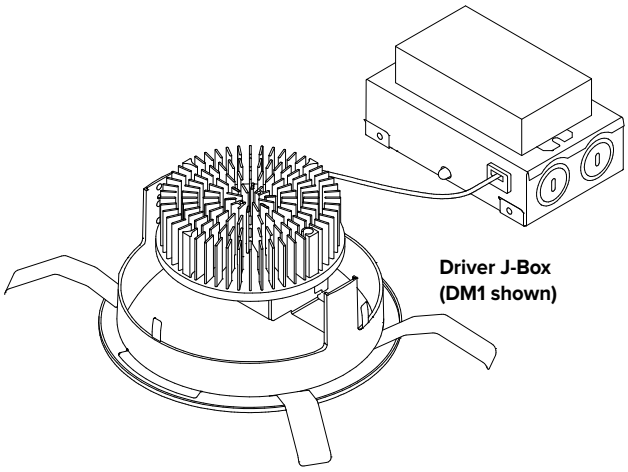

Driver J-Box (DM1 shown)


Light Engine with Trim assembly installed

DIMENSIONAL DATA		
APERTURE		ø5.75" (101.6mm)
OVERALL		ø7.13" (181.0mm)
FLANGE WIDTH	Standard	0.69" (17.5mm)
	Flush Mount	0.20" (5.1mm)
FLANGE TO FLANGE	Standard	Ø7.13" (136.6mm)
	Flush Mount	Ø6.15" (156.2mm)
CEILING CUTOUT	Standard	Ø6.50" (165.1mm)
	Flush Mount	Ø6.63" (168.4mm)
CEILING THICKNESS		0.50" – 2.50" (12.7 – 63.5mm)


LFR-6RDS LIGHT ENGINE

OVERALL LIGHT ENGINE HEIGHT "A" *		
LUMEN PACKAGE	FIXTURE MODULE	BEAM DISTRIBUTION
		VNR / NR / MD / WD
10L–30L	STANDARD	3.56" (90.4mm)
	CP	4.95" (125.7mm)

* Note: Add ½" minimum plenum clearance above overall Light Engine Height.
** For 30L: Marked spacing required 36" fixture center to center; 18" fixture center to building member; 0.5" above fixture.
*** Non-IC rating requires 3" from insulation and combustible materials.

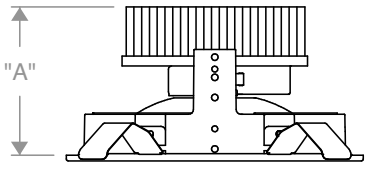

Side View Standard

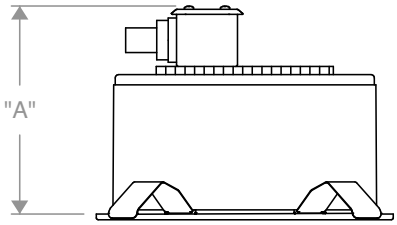

Side View CP – Chicago Plenum


© 2026 HLI Solutions, Inc. All rights reserved. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

LFR-6RDS


LITEFRAME 6" ROUND SHALLOW DOWNLIGHT

DIMENSIONS (CONTINUED)


DRIVER J-BOX

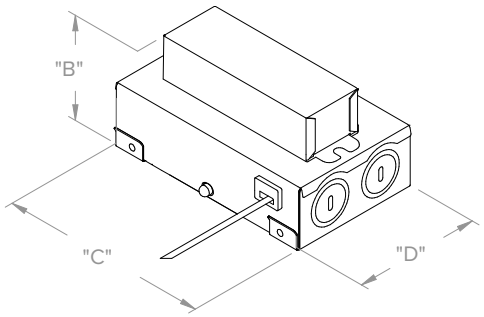


DM1 / DM01 / PDM / DALI

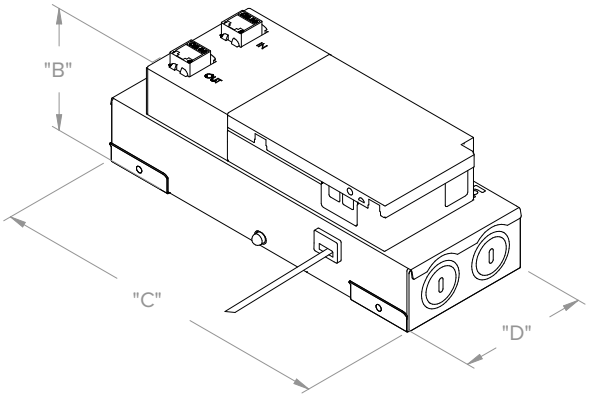


DMX

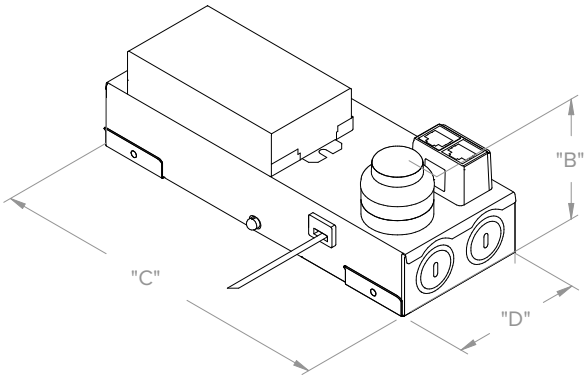

NX CONTROLS OPTION

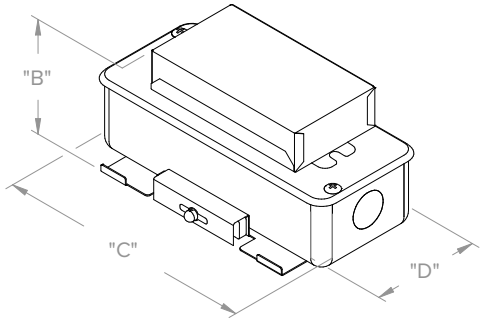

CP

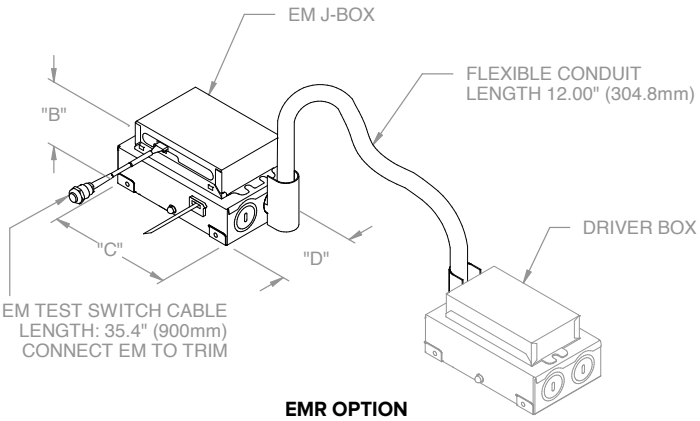

EMR OPTION

EMR/Driver J-Box Conduit (provided) connects to Driver J-Box
(see Driver J-Box for additional details)

OVERALL DRIVER J-BOX DIMENSIONS (ALL LUMEN OUTPUTS)				
DRIVER/ CONTROLS /OPTIONS	"B" (HEIGHT)	"C" (LENGTH)	"D" (WIDTH)	MINIMUM J-BOX PLENUM CLEARANCE
DM1 / DM01 / PDM / DALI	2.67" (67.8mm)	5.34" (135.6mm)	3.23" (82.0mm)	3.00" (76.2mm)
DMX	3.07" (78.0mm)	8.68" (220.5mm)	3.23" (82.0mm)	3.50" (88.9mm)
NX	3.02" (76.7mm)	8.68" (220.5mm)	3.23" (82.0mm)	3.75" (95.3mm)
EMR	2.73" (69.3mm)	5.34" (135.6mm)	3.23" (82.0mm)	3.00" (76.2mm)
CP	1.89" (73.4mm)	6.50" (165.1mm)	2.72" (69.1mm)	3.00" (76.2mm)

© 2026 HLI Solutions, Inc. All rights reserved. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

prescolite

LFR-6RDS

LITEFRAME 6" ROUND SHALLOW DOWNLIGHT


DATE: LOCATION:


TYPE: PROJECT:

CATALOG #:


DIMENSIONS (CONTINUED)


OPTIONAL HOUSINGS

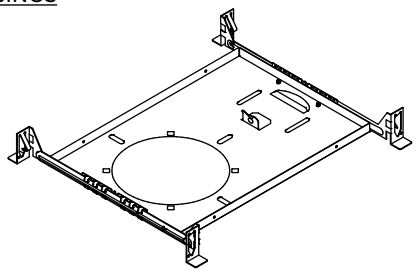

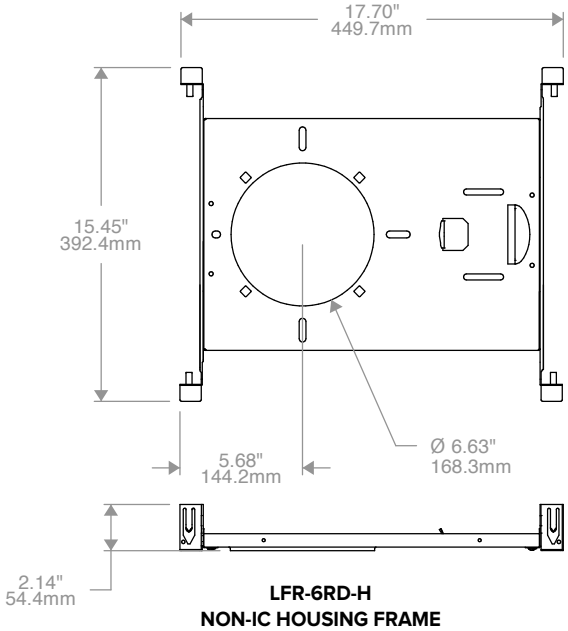


LFR-6RD-H
NON-IC HOUSING FRAME




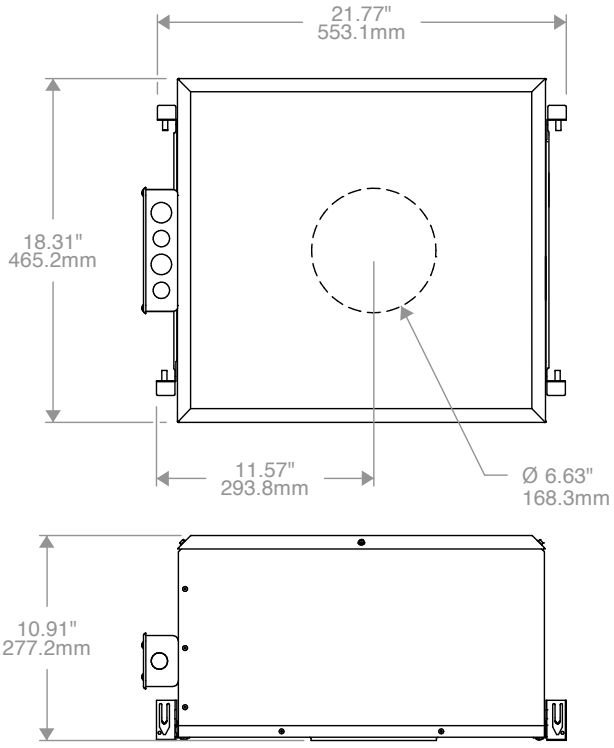

LFR-6RD-H-IC
IC HOUSING
Not for use with CP Shroud

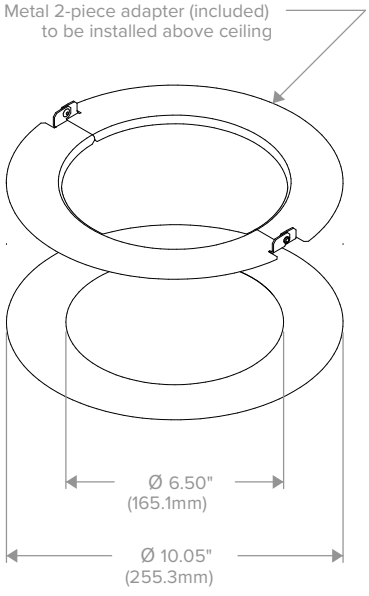

ROUND LF-MOR6-R
METAL OVERSIZED RING
(See LF-MOR Installation Instruction for more details)

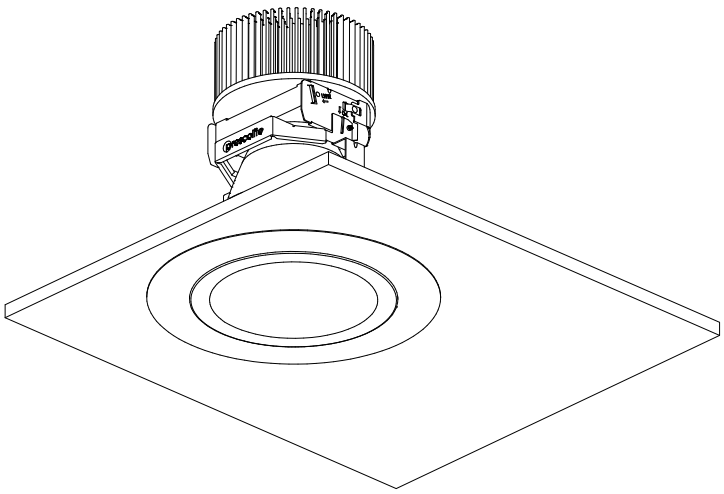

© 2026 HLI Solutions, Inc. All rights reserved. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

prescolite

DATE: LOCATION:

TYPE: PROJECT:

CATALOG #:

LFR-6RDS

LITEFRAME 6" ROUND SHALLOW DOWNLIGHT

PHOTOMETRY

LFR-6RDS-M-20L35K9VNR-DM1 / LFR-6RDS-T-VNR-S


LUMINAIRE DATA

Test No.	**25.00695**
Description	**2000 lm, Very Narrow, 3500K, 90 CRI**
Delivered Lumens	**1989**
Watts	**15.9W**
Efficacy	**125**
Mounting	**Recessed/Ceiling**
Spacing Criterion	**0.3**
Beam Angle (FWHM)	**18**

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0–40	1925	96.8
0–60	1986	99.8
0–90	1989	100.0
0–180	1989	100.0

POLAR GRAPH

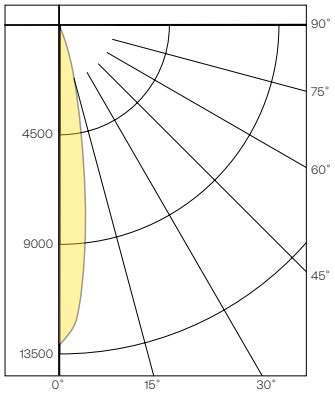

CANDELA DISTRIBUTION

Degree	Candela
0	13158
5	10778
15	2553
25	438
35	123
45	50
55	25
65	2
75	0
85	0
90	0

LUMINANCE DATA*

Vertical Angle	Average
45°	3876
55°	2389
65°	259
75°	0
85°	0

*Candela/Square Meter

LFR-6RDS-M-20L35K9NR-DM1 / LFR-6RDS-T-S


LUMINAIRE DATA

Test No.	**25.00696**
Description	**2000 lm, Narrow, 3500K, 90 CRI**
Delivered Lumens	**1961**
Watts	**15.9W**
Efficacy	**123**
Mounting	**Recessed/Ceiling**
Spacing Criterion	**0.4**
Beam Angle (FWHM)	**25**

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0–40	1885	96.1
0–60	1957	99.8
0–90	1961	100.0
0–180	1961	100.0

POLAR GRAPH

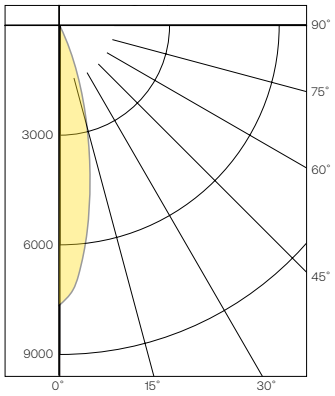

CANDELA DISTRIBUTION

Degree	Candela
0	7674
5	6691
15	3035
25	735
35	159
45	58
55	30
65	2
75	0
85	0
90	0

LUMINANCE DATA*

Vertical Angle	Average
45°	4497
55°	2867
65°	259
75°	0
85°	0

*Candela/Square Meter

LFR-6RDS-M-20L35K9MD-DM1 / LFR-6RDS-T-S


LUMINAIRE DATA

Test No.	**26.00728**
Description	**2000 lm, Medium, 3500K, 90 CRI**
Delivered Lumens	**1977**
Watts	**16.2W**
Efficacy	**122**
Mounting	**Recessed/Ceiling**
Spacing Criterion	**0.4**
Beam Angle (FWHM)	**26**

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0–40	1888	95.5
0–60	1972	99.8
0–90	1977	100.0
0–180	1977	100.0

POLAR GRAPH

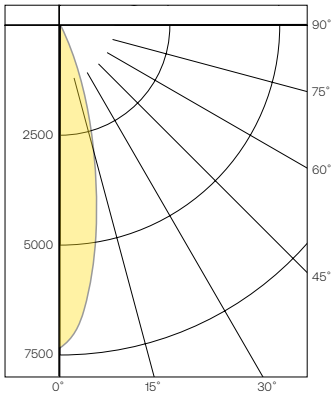

CANDELA DISTRIBUTION

Degree	Candela
0	7374
5	6507
15	3016
25	766
35	177
45	67
55	35
65	3
75	0
85	0
90	0

LUMINANCE DATA*

Vertical Angle	Average
45°	5656
55°	3642
65°	424
75°	0
85°	0

*Candela/Square Meter

© 2026 HLI Solutions, Inc. All rights reserved. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

LFR-6RDS

LITEFRAME 6" ROUND SHALLOW DOWNLIGHT

PHOTOMETRY (CONTINUED)

LFR-6RDS-M-20L35K9WD-DM1 / LFR-6RDS-T-S


LUMINAIRE DATA

Test No.	**25.00697**
Description	**2000 lm, Wide, 3500K, 90 CRI**
Delivered Lumens	**2047**
Watts	**15.9W**
Efficacy	**128**
Mounting	**Recessed/Ceiling**
Spacing Criterion	**0.9**
Beam Angle (FWHM)	**57**

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0–40	1976	96.5
0–60	2045	99.9
0–90	2047	100.0
0–180	2047	100.0

POLAR GRAPH

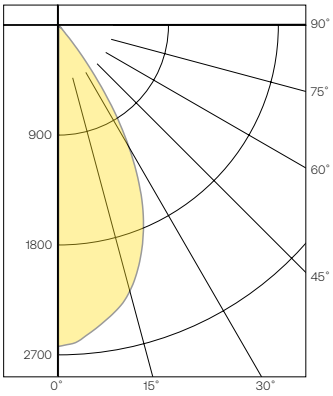

CANDELA DISTRIBUTION

Degree	Candela
0	2621
5	2545
15	2245
25	1620
35	608
45	49
55	20
65	1
75	0
85	0
90	0

LUMINANCE DATA*

Vertical Angle	Average
45°	3799
55°	1912
65°	130
75°	0
85°	0

*Candela/Square Meter

LUMEN MULTIPLIER

Option	27K9	30K9	35K9	40K9	50K9
Multiplier	0.94	0.98	1.00	1.01	1.02


Photometrics are published at a nominal 3500 Kelvin, 90+ CRI. This table may be used to approximate the lumen values at different Kelvin temperatures. Power consumption would stay the same.

REFLECTOR FINISH MULTIPLIER (Based on Clear (Standard) Color)

Option	Specular (S)	Semi-Specular (SS)	White Cone (WC)
Multiplier	1	0.909	0.984

TM-30 DATA

COLOR VECTOR GRAPHIC
3500K, 90 CRI

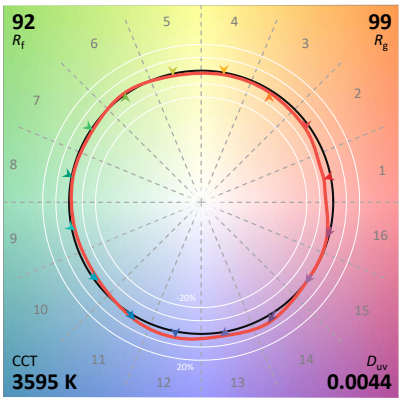

TEST RESULTS - 3500K	
Value	90+ CRI
R_f	92
R_g	99
CCT (K)	3595
D_{UV}	0.0044
x	0.4045
y	0.4004
CIE R_a	93
CIE R_9	61

© 2026 HLI Solutions, Inc. All rights reserved. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

prescolite

DATE: LOCATION:

TYPE: PROJECT:

CATALOG #:

LFR-6RDS

LITEFRAME 6" ROUND SHALLOW DOWNLIGHT

ELECTRICAL DATA

DRIVER DATA		
Input Voltage	120–277 V	347 V
Input Frequency	50/60 Hz	50/60 Hz
Power Factor	≥0.90	≥0.90
THD	<20%	<20%
EMI Filtering (FCC 47 CFR Part 15)	Class A	Class A

* Values for DM1 option shown, values for other dimming options may vary.

ADDITIONAL INFORMATION

Dimming Compatibility

For more details and recommended dimmer list, see Dimming Compatibility Information on currentlighting.com/prescolite.

DMX

See instruction sheet on currentlighting.com/prescolite for connection & installation information.

Central Inverters

For full fixture output in back-up mode, we recommend you visit currentlighting.com/dual-lite for your Central Lighting Inverter options. Please contact your local Current representative for any assistance with proper sizing and loading of your inverter selection. Central lighting inverters must be ordered separately.

Lumen Output in Emergency Mode

To determine the lumen output in emergency mode, multiply the battery pack wattage by the fixture lumens per watt (LPW).
For example, 10W x 120 LPW = 1200 lumens in emergency mode.

© 2026 HLI Solutions, Inc. All rights reserved. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.