
solavanti lighting

DATE:
CUSTOMER:
PROJECT:
QUANTITY:

ANTO+- *Recessed*

Recessed LED Mix & Match, Customizable Lighting System

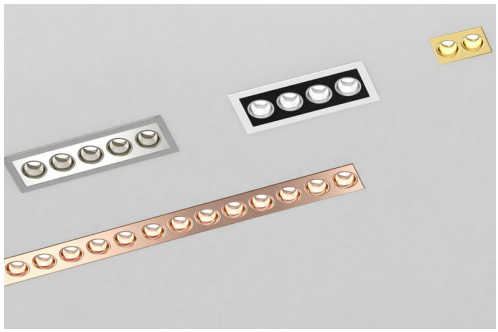

Driver is Universal 0-10 V

FAMILY	ITEM#	Mounting	Size	-	Tube Color	Mask Color	Housing Color		Temp/CRI		Driver		Beam	
ANTO+- R	PS44								C1					
		E Frame F Frameless	FRAME **OPTION ONLY** 007 | 2 Spots- 3" 013 | 4 Spots- 5.35" 019 | 6 Spots- 7.71" 025 | 8 Spots- 10.07" 037 | 12 Spots- 14.80" 055 | 18 Spots- 21.88" FRAMELESS **OPTION ONLY** 006 | 2 Spots- 2.52" 012 | 4 Spots- 4.88" 018 | 6 Spots- 7.24" 024 | 8 Spots- 9.60" 036 | 12 Spots- 14.33" 054 | 18 Spots- 21.41"		B High-Gloss Silver P Silver Matte G High-Gloss Gold K High-Gloss Copper W White (RAL 9016) N Black (RAL 9005) D Glaring Gold R Capital Copper Y Gunnery Grey Z High-Gloss Black Chrome	B High-Gloss Silver P Silver Matte G High-Gloss Gold K High-Gloss Copper W White (RAL 9016) N Black (RAL 9005) D Glaring Gold R Capital Copper Y Gunnery Grey Z High-Gloss Black Chrome	Sl Silver WS White SW Black		927 2700K, CRI > 90 930 3000K, CRI > 90 940 4000K, CRI > 90		H3 High		1 15° 3 30° 4 45° A Asymm/ Oval

SYSTEM POWER (W)

	high output
2 spots	6.7W
4 spots	10.5W
6 spots	13.5W
8 spots	18W
12 spots	26W
18 spots	41W

PHOTOMETRICS

