MICRO VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Round - Core Drill

(formerly Mini-Micro Recessed Downlight / DM-LED)

Configure

VS - CR - LOD - LHP - ___ - RO - CD - FSD - ___ - ___ - ___ - NON - ___ - ___ - ___ - ___

01 02 03 04 05 06A 06B 06C 06D 07 08 09 10A 10B 11 12

VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Round - Core Drill - Faceplate: Standard - Non-dimming

01 SERIES
VS - VERSA STAR

02 CATEGORY
CR - Ceiling Recessed

03 DRIVER
LOD - Low Voltage

04 LIGHT SOURCE (TYPE)
LHP - LED High-Power

05 MATERIAL
AL - Aluminum
BR - Brass
SS - Stainless Steel

06A SHAPE
RO - Round

06B MOUNT
CD - Core Drill

06C STYLE
FSD - Faceplate: Standard

06D VERSION
MIC-OASY - Micro - Asymmetrical Optics
MIC-OSYM - Micro - Symmetrical Optics

07 LIGHT SOURCE
e70 - 2700K CRI80 - 3W (140 - 168 lm)
e71 - 3000K CRI80 - 3W (146 - 175 lm)
e72 - 4000K CRI80 - 3W (164 - 197 lm)
e73 - Amber - 3W
e85 - 2700K CRI90 - 3W
e86 - 3000K CRI90 - 3W
e87 - 3500K CRI80 - 3W

08 OPTIC
SP - Spot (17°)
SP2 - Spot (21°)
NFL - Narrow Flood (28°)
ASY - Asymmetrical (17x31°)

09 CONTROL
NON - Non-dimming

10A LENS
12 - Soft Focus
13 - Rectilinear
09 - Clear (Standard)

10B SHIELDING
00 - Not included (Standard)
11 - Honeycomb Baffle

11 WIRING LENGTH
WL00 - Standard
WL25 - 25 Ft Leads

12 FINISH
Stainless Steel Finishes
MAS, **POS**
Standard Finishes
BLP, **BZP**, **WHP**, **SAP**, **BLW**, **BZW**, **WHW**, **VER**
Premium Finishes
CMG, **RMG**, **AMG**, **TXF**, **BCM**, **BGE**, **WCP**, **OCP**, **HUG**, **ABP**, **BPP**, **SDS**, **WIR**, **CAP**, **CRM**, **AQW**, **NBP**
Brass Finishes
MAB, **POB**, **MIT**
Other - RAL
RAL
Other - Custom Color
CUS

Compatible Mounting & Power Supply Option Types

(Configured separately. For the full list of compatible options, please use the "Order Separately" section located on **this product web page**.)



Transformer




Universal Power Module

Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

MICRO VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Round - Core Drill

(formerly Mini-Micro Recessed Downlight / DM-LED)

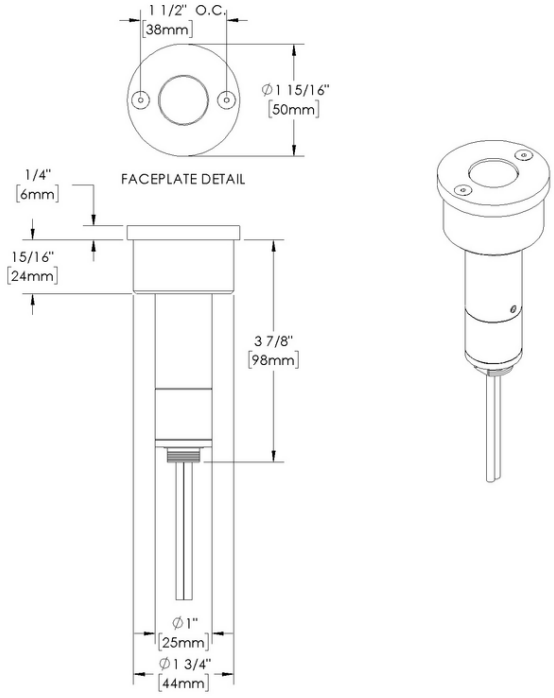







Finishes



For more detailed information and visuals regarding our finishes, visit www.bklighting.com/finishes

Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

MICRO VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Round - Core Drill

(formerly Mini-Micro Recessed Downlight / DM-LED)

IP66

Features



Anti-condensation vent allows moisture to exit the fixture but never enter in



Lens factory adhered to fixture cap providing hermetically sealed optical compartment



Secured with flush, countersunk tamper resistant hardware



Machined solid billet faceplate provides unmatched strength and durability



Manufactured in the USA with sustainable processes



Water-tight anti-siphon plug prevents moisture ingress from wireways



Easily replaceable modular components reduce waste and extend fixture life



Solid billet fixture body provides unmatched durability and heat management

Technical

Driver: Low Voltage

Light Source (Type): LED High-Power

Material: Stainless Steel, Brass, Aluminum

CCT (K): Amber, 2700, 3500, 3000, 4000

CRI: 80, 90

Input Power (W): 3

Delivered Lumens (lm): 140 - 197

Beam Angle (°): 17, 17x31, 21, 28

Control: Non-dimming (standard). For dimmable options, contact Customer Service.

Shape: Round

Mount: Core Drill

Style: Faceplate: Standard

Version: Micro - Symmetrical Optics, Micro - Asymmetrical Optics

Input Voltage: 12V

Lens: Soft Focus, Rectilinear, Clear (Standard)

Shielding: Not included (Standard), Honeycomb Baffle

Wiring Length: Standard

Finish: Stainless Steel Finishes, Standard Finishes, Premium Finishes, Brass Finishes, Other - RAL, Other - Custom Color

IP Rating: IP66 rated

Weight (lbs): 0.41 - 0.66

Source to Lens Distance (in): 0.75

Body: Unibody design, with enclosed, water-proof wireway and integral heat sink, fully machined from solid billet.

Material Detail: Furnished in stainless steel (304)., Furnished in brass (360)., Furnished in copper-free aluminum (6061-T6).

Faceplate: Fully machined from solid billet. Countersunk holes provide for flush hardware mounting. Accommodates two (2) lens or louver media.

Light Source Detail: High power LEDs modular design with electrical disconnects.

Optics: Interchangeable optics permit changes in the field.

Hardware: Mount with two (2) #10 fasteners as required (hardware not included). Length and type of mounting screws will vary with construction material.

Sealing: High temperature silicone ‘O’ Ring in fixture knuckle provides water-tight seal at joint.

Finish Detail: Metal finish option only for stainless steel material., Powder coat or metal finish options available for brass material., StarGuard, our 15-stage chromate-free process, cleans and conversion coats aluminum components prior to application of Class ‘A’ TGIC polyester powder coating. It is RoHS compliant.

Warranty: 5-year limited warranty.

Certification: Made in USA, UL Listed, Suitable for Wet Locations

WARNING: This is a low voltage product. Please check "Mountings With A Power Supply" or "Power Supplies" to order remote transformer separately.

B-K LIGHTING AMERICAN MADE + EMPLOYEE OWNED | 40429 Brickyard Drive, Madera, CA 93636 | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Updated 11/02/2026

MICRO VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Round - Core Drill

(formerly Mini-Micro Recessed Downlight / DM-LED)

Light Source

Configure your product to display exact performance values

Light Source	Optic	Beam Angle	CCT (K)	CRI	Input Power (W)	Delivered Lumens (Lm)	CBCP
-	-	-	-	-	-	-	-

Without selecting your configuration

Light Source	Optic	Beam Angle	CCT (K)	CRI	Input Power (W)	Delivered Lumens (Lm)	CBCP
e70	SP - Spot	17°	2700	80	3	168	1352
e70	SP2 - Spot	21°	2700	80	3	140	666
e70	NFL - Narrow Flood	28°	2700	80	3	149	525
e71	SP - Spot	17°	3000	80	3	175	1411
e71	SP2 - Spot	21°	3000	80	3	146	695
e71	NFL - Narrow Flood	28°	3000	80	3	156	548
e72	SP - Spot	17°	4000	80	3	197	1585
e72	SP2 - Spot	21°	4000	80	3	164	781
e72	NFL - Narrow Flood	28°	4000	80	3	175	616
e73	SP - Spot	17°	Amber		3		
e73	SP2 - Spot	21°	Amber		3		
e73	NFL - Narrow Flood	28°	Amber		3		
e85	SP - Spot	17°	2700	90	3		
e85	SP2 - Spot	21°	2700	90	3		
e85	NFL - Narrow Flood	28°	2700	90	3		
e86	SP - Spot	17°	3000	90	3		
e86	SP2 - Spot	21°	3000	90	3		
e86	NFL - Narrow Flood	28°	3000	90	3		
e87	SP - Spot	17°	3500	80	3		
e87	SP2 - Spot	21°	3500	80	3		
e87	NFL - Narrow Flood	28°	3500	80	3		
e70	ASY - Asymmetrical	17x31°	2700	80	3	152	602
e71	ASY - Asymmetrical	17x31°	3000	80	3	160	634
e72	ASY - Asymmetrical	17x31°	4000	80	3	178	721
e73	ASY - Asymmetrical	17x31°	Amber		3		
e85	ASY - Asymmetrical		2700	90	3		
e86	ASY - Asymmetrical		3000	90	3		
e87	ASY - Asymmetrical		3500	80	3		

Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com