VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Core Drill

(formerly Versa Star / CD-VSL-LED), (formerly Versa Star / CD-VS-LED), (formerly Versa Star / CD-VQL-LED), (formerly Versa Star / CD-VQ-LED)

Configure

VS - CR - LOD - LHP - ___ - ___ - CD - ___ - ___ - ___ - ___ - ___ - ___ - ___ - ___
01 02 03 04 05 06A 06B 06C 07 08 10A 10B 11 12

VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Core Drill

01 SERIES
VS - VERSA STAR

02 CATEGORY
CR - Ceiling Recessed

03 DRIVER
LOD - Low Voltage

04 LIGHT SOURCE (TYPE)
LHP - LED High-Power

05 MATERIAL
AL - Aluminum
BR - Brass
SS - Stainless Steel

06A SHAPE
RO - Round
SQ - Square

06B MOUNT
CD - Core Drill

06C STYLE
FLDC - Faceplate: Louvered - Pattern C - 30° Angle - Round
FLDF - Faceplate: Louvered - Pattern F - 0° Angle - Round
FLDG - Faceplate: Louvered - Pattern G - 0° Angle - Rectangular
FSD - Faceplate: Standard

07 LIGHT SOURCE
e64 - 2700K CRI80 - 7W
e65 - 3000K CRI80 - 7W
e66 - 4000K CRI80 - 7W
e74 - Amber - 7W
e79 - 2700K CRI90 - 7W
e80 - 3000K CRI90 - 7W
e81 - 3500K CRI80 - 7W

08 OPTIC
NSP - Narrow Spot (13°)
SP - Spot (16°)
SP2 - Spot (23°)
MFL - Medium Flood (31°)

10A LENS
12 - Soft Focus
13 - Rectilinear

10B SHIELDING
00 - Not included (Standard)
11 - Honeycomb Baffle

11 WIRING LENGTH
WL00 - Standard
WL25 - 25 Ft Leads

12 FINISH
Stainless Steel Finishes
MAS, **POS**
Standard Finishes
BLP, **BZP**, **WHP**, **SAP**, **BLW**, **BZW**, **WHW**, **VER**
Premium Finishes
CMG, **RMG**, **AMG**, **TXF**, **BCM**, **BGE**, **WCP**, **OCP**, **HUG**, **ABP**, **BPP**, **SDS**, **WIR**, **CAP**, **CRM**, **AQW**, **NBP**
Brass Finishes
MAB, **POB**, **MIT**
Other - RAL
RAL
Other - Custom Color
CUS

Compatible Mounting & Power Supply Option Types

(Configured separately. For the full list of compatible options, please use the "Order Separately" section located on **this product web page**.)


In-grade HP2


Transformer

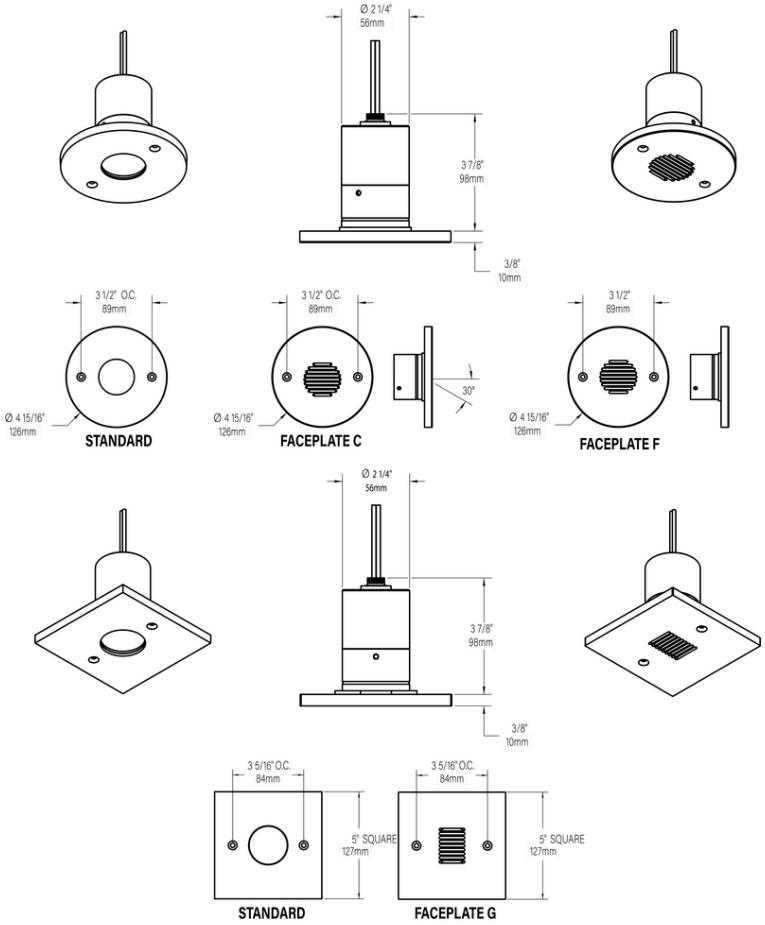

Universal Power Module

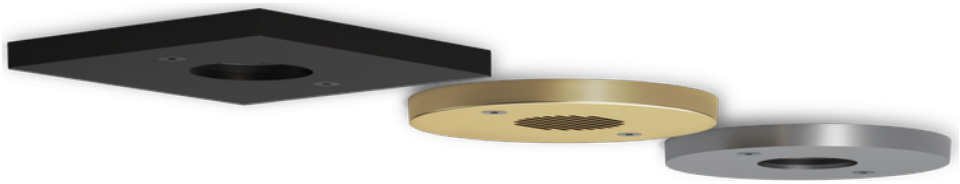
Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Core Drill

(formerly Versa Star / CD-VSL-LED), (formerly Versa Star / CD-VS-LED), (formerly Versa Star / CD-VQL-LED), (formerly Versa Star / CD-VQ-LED)





Finishes



For more detailed information and visuals regarding our finishes, visit www.bklighting.com/finishes

Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Core Drill

(formerly Versa Star / CD-VSL-LED), (formerly Versa Star / CD-VS-LED), (formerly Versa Star / CD-VQL-LED), (formerly Versa Star / CD-VQ-LED)

IP66

Features



Anti-condensation vent allows moisture to exit the fixture but never enter in



Lens factory adhered to fixture cap providing hermetically sealed optical compartment



Secured with flush, countersunk tamper resistant hardware



Machined solid billet faceplate provides unmatched strength and durability



Manufactured in the USA with sustainable processes



Water-tight anti-siphon plug prevents moisture ingress from wireways



Easily replaceable modular components reduce waste and extend fixture life



Solid billet fixture body provides unmatched durability and heat management

Technical

Driver: Low Voltage

Light Source (Type): LED High-Power

Material: Stainless Steel, Brass, Aluminum

CCT (K): Amber, 2700, 3500, 3000, 4000

CRI: 80, 90

Input Power (W): 7

Delivered Lumens (lm): 28 - 524

Beam Angle (°): 13, 16, 23, 31

Control: MLV dimming capable via compatible remote magnetic transformer. See Mountings & Power Supplies section to order.

Shape: Square, Round

Mount: Core Drill

Style: Faceplate: Standard, Faceplate: Louvered - Pattern G - 0° Angle - Rectangular, Faceplate: Louvered - Pattern C - 30° Angle - Round, Faceplate: Louvered - Pattern F - 0° Angle - Round

Input Voltage: 12V

Lens: Soft Focus, Rectilinear

Shielding: Not included (Standard), Honeycomb Baffle

Wiring Length: Standard, 25 Ft Leads

Finish: Stainless Steel Finishes, Standard Finishes, Premium Finishes, Brass Finishes, Other - RAL, Other - Custom Color

IP Rating: IP66 rated

Weight (lbs): 1.51 - 2.77

Source to Lens Distance (in): 0.77

Body: Unibody design, with enclosed, water-proof wireway and integral heat sink, fully machined from solid billet.

Material Detail: Furnished in stainless steel (304)., Furnished in brass (360)., Furnished in copper-free aluminum (6061-T6).

Faceplate: Fully machined from solid billet. Countersunk holes provide for flush hardware mounting. Accommodates two (2) lens or louver media.

Light Source Detail: High power LEDs modular design with electrical disconnects., Adjust-e-Lume, an LED board feature, allows for dynamic lumen response at the individual fixture. Indexed (100% to 25% nom.) lumen output. Maintains output at desired level or may be changed (A9 to A1). Standard preset from the factory is A9 (100%).

Optics: Interchangeable optics permit changes in the field.

Hardware: Mount with two (2) #10 fasteners as required (hardware not included). Length and type of mounting screws will vary with construction material.

Sealing: High temperature silicone ‘O’ Ring in fixture knuckle provides water-tight seal at joint.

Finish Detail: Metal finish option only for stainless steel material., Powder coat or metal finish options available for brass material., StarGuard, our 15-stage chromate-free process, cleans and conversion coats aluminum components prior to application of Class ‘A’ TGIC polyester powder coating. It is RoHS compliant.

Warranty: 5-year limited warranty.

Certification: Made in USA, UL Listed, Suitable for Wet Locations

WARNING: This is a low voltage product. Please check "Mountings With A Power Supply" or "Power Supplies" to order remote transformer separately.

B-K LIGHTING AMERICAN MADE + EMPLOYEE OWNED | 40429 Brickyard Drive, Madera, CA 93636 | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Updated 10/24/2026

VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Core Drill

(formerly Versa Star / CD-VSL-LED), (formerly Versa Star / CD-VS-LED), (formerly Versa Star / CD-VQL-LED), (formerly Versa Star / CD-VQ-LED)

Light Source

Configure your product to display exact performance values

Light Source	Optic	Beam Angle	CCT (K)	CRI	Input Power (W)	Delivered Lumens (Lm)	CBCP
-	-	-	-	-	-	-	-

Without selecting your configuration

Light Source	Optic	Beam Angle	CCT (K)	CRI	Input Power (W)	Delivered Lumens (Lm)	CBCP
e64	NSP - Narrow Spot	13°	2700	80	7	456	5993
e64	SP - Spot	16°	2700	80	7	445	4546
e64	SP2 - Spot	23°	2700	80	7	397	1726
e64	MFL - Medium Flood	31°	2700	80	7	399	1131
e65	NSP - Narrow Spot	13°	3000	80	7	466	6131
e65	SP - Spot	16°	3000	80	7	455	4650
e65	SP2 - Spot	23°	3000	80	7	406	1766
e65	MFL - Medium Flood	31°	3000	80	7	409	1157
e66	NSP - Narrow Spot	13°	4000	80	7	524	6889
e66	SP - Spot	16°	4000	80	7	511	5225
e66	SP2 - Spot	23°	4000	80	7	456	1984
e66	MFL - Medium Flood	31°	4000	80	7	459	1300
e74	NSP - Narrow Spot	13°	Amber		7	299	3927
e74	SP - Spot	16°	Amber		7	291	2978
e74	SP2 - Spot	23°	Amber		7	260	1131
e74	MFL - Medium Flood	31°	Amber		7	262	741
e79	NSP - Narrow Spot	13°	2700	90	7		
e79	SP - Spot	16°	2700	90	7		
e79	SP2 - Spot	23°	2700	90	7		
e79	MFL - Medium Flood	31°	2700	90	7		
e80	NSP - Narrow Spot	13°	3000	90	7		
e80	SP - Spot	16°	3000	90	7		
e80	SP2 - Spot	23°	3000	90	7		
e80	MFL - Medium Flood	31°	3000	90	7		
e81	NSP - Narrow Spot	13°	3500	80	7		
e81	SP - Spot	16°	3500	80	7		
e81	SP2 - Spot	23°	3500	80	7		
e81	MFL - Medium Flood	31°	3500	80	7		
e64	NSP - Narrow Spot	13°	2700	80	7	247	
e64	SP - Spot	16°	2700	80	7	215	
e64	SP2 - Spot	23°	2700	80	7	199	
e64	MFL - Medium Flood	31°	2700	80	7	112	
e65	NSP - Narrow Spot	13°	3000	80	7	253	
e65	SP - Spot	16°	3000	80	7	220	
e65	SP2 - Spot	23°	3000	80	7	204	
e65	MFL - Medium Flood	31°	3000	80	7	115	
e66	NSP - Narrow Spot	13°	4000	80	7	284	
e66	SP - Spot	16°	4000	80	7	247	
e66	SP2 - Spot	23°	4000	80	7	229	
e66	MFL - Medium Flood	31°	4000	80	7	129	
e74	NSP - Narrow Spot	13°	Amber		7		
e74	SP - Spot	16°	Amber		7		
e74	SP2 - Spot	23°	Amber		7		
e74	MFL - Medium Flood	31°	Amber		7		
e79	NSP - Narrow Spot	13°	2700	90	7		

Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Core Drill

(formerly Versa Star / CD-VSL-LED), (formerly Versa Star / CD-VS-LED), (formerly Versa Star / CD-VQL-LED), (formerly Versa Star / CD-VQ-LED)

Light Source	Optic	Beam Angle	CCT (K)	CRI	Input Power (W)	Delivered Lumens (Lm)	CBCP
e79	SP - Spot	16°	2700	90	7		
e79	SP2 - Spot	23°	2700	90	7		
e79	MFL - Medium Flood	31°	2700	90	7		
e80	NSP - Narrow Spot	13°	3000	90	7		
e80	SP - Spot	16°	3000	90	7		
e80	SP2 - Spot	23°	3000	90	7		
e80	MFL - Medium Flood	31°	3000	90	7		
e81	NSP - Narrow Spot	13°	3500	80	7		
e81	SP - Spot	16°	3500	80	7		
e81	SP2 - Spot	23°	3500	80	7		
e81	MFL - Medium Flood	31°	3500	80	7		
e64	NSP - Narrow Spot	13°	2700	80	7	49	
e64	SP - Spot	16°	2700	80	7	46	
e64	SP2 - Spot	23°	2700	80	7	44	
e64	MFL - Medium Flood	31°	2700	80	7	28	
e65	NSP - Narrow Spot	13°	3000	80	7	50	
e65	SP - Spot	16°	3000	80	7	47	
e65	SP2 - Spot	23°	3000	80	7	45	
e65	MFL - Medium Flood	31°	3000	80	7	28	
e66	NSP - Narrow Spot	13°	4000	80	7	56	
e66	SP - Spot	16°	4000	80	7	52	
e66	SP2 - Spot	23°	4000	80	7	51	
e66	MFL - Medium Flood	31°	4000	80	7	32	
e74	NSP - Narrow Spot	13°	Amber		7		
e74	SP - Spot	16°	Amber		7		
e74	SP2 - Spot	23°	Amber		7		
e74	MFL - Medium Flood	31°	Amber		7		
e79	NSP - Narrow Spot	13°	2700	90	7		
e79	SP - Spot	16°	2700	90	7		
e79	SP2 - Spot	23°	2700	90	7		
e79	MFL - Medium Flood	31°	2700	90	7		
e80	NSP - Narrow Spot	13°	3000	90	7		
e80	SP - Spot	16°	3000	90	7		
e80	SP2 - Spot	23°	3000	90	7		
e80	MFL - Medium Flood	31°	3000	90	7		
e81	NSP - Narrow Spot	13°	3500	80	7		
e81	SP - Spot	16°	3500	80	7		
e81	SP2 - Spot	23°	3500	80	7		
e81	MFL - Medium Flood	31°	3500	80	7		
e64	NSP - Narrow Spot	13°	2700	80	7	247	
e64	SP - Spot	16°	2700	80	7	215	
e64	SP2 - Spot	23°	2700	80	7	199	
e64	MFL - Medium Flood	31°	2700	80	7	112	
e65	NSP - Narrow Spot	13°	3000	80	7	253	
e65	SP - Spot	16°	3000	80	7	220	
e65	SP2 - Spot	23°	3000	80	7	204	
e65	MFL - Medium Flood	31°	3000	80	7	115	
e66	NSP - Narrow Spot	13°	4000	80	7	284	
e66	SP - Spot	16°	4000	80	7	247	
e66	SP2 - Spot	23°	4000	80	7	229	
e66	MFL - Medium Flood	31°	4000	80	7	129	
e74	NSP - Narrow Spot	13°	Amber		7		
e74	SP - Spot	16°	Amber		7		
e74	SP2 - Spot	23°	Amber		7		
e74	MFL - Medium Flood	31°	Amber		7		
e79	NSP - Narrow Spot	13°	2700	90	7		

Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Core Drill

(formerly Versa Star / CD-VSL-LED), (formerly Versa Star / CD-VS-LED), (formerly Versa Star / CD-VQL-LED), (formerly Versa Star / CD-VQ-LED)

Light Source	Optic	Beam Angle	CCT (K)	CRI	Input Power (W)	Delivered Lumens (Lm)	CBCP
e79	SP - Spot	16°	2700	90	7		
e79	SP2 - Spot	23°	2700	90	7		
e79	MFL - Medium Flood	31°	2700	90	7		
e80	NSP - Narrow Spot	13°	3000	90	7		
e80	SP - Spot	16°	3000	90	7		
e80	SP2 - Spot	23°	3000	90	7		
e80	MFL - Medium Flood	31°	3000	90	7		
e81	NSP - Narrow Spot	13°	3500	80	7		
e81	SP - Spot	16°	3500	80	7		
e81	SP2 - Spot	23°	3500	80	7		
e81	MFL - Medium Flood	31°	3500	80	7		

Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com