# **VERSA STAR** - Ceiling Recessed - Low Voltage - LED High-Power - Round - Core Drill - Faceplate: Standard

(formerly Versa Star / CD-VS-LED)

## Configure

VS - CR - LOD - LHP - ___ - RO - CD - FSD - ___ - ___ - ___ - ___ - ___ - ___ - ___

01 02 03 04 05 06A 06B 06C 07 08 10A 10B 11 12

VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Round - Core Drill - Faceplate: Standard

### 01 SERIES

**VS** - VERSA STAR

### 02 CATEGORY

**CR** - Ceiling Recessed

### 03 DRIVER

**LOD** - Low Voltage

### 04 LIGHT SOURCE (TYPE)

**LHP** - LED High-Power

### 05 MATERIAL

**AL** - Aluminum
**BR** - Brass
**SS** - Stainless Steel

### 06A SHAPE

**RO** - Round

### 06B MOUNT

**CD** - Core Drill

### 06C STYLE

**FSD** - Faceplate: Standard

### 07 LIGHT SOURCE

**e64** - 2700K CRI80 - 7W
**e65** - 3000K CRI80 - 7W
**e66** - 4000K CRI80 - 7W
**e74** - Amber - 7W
**e79** - 2700K CRI90 - 7W
**e80** - 3000K CRI90 - 7W
**e81** - 3500K CRI80 - 7W

### 08 OPTIC

**NSP** - Narrow Spot (13°)
**SP** - Spot (16°)
**SP2** - Spot (23°)
**MFL** - Medium Flood (31°)

### 10A LENS

**12** - Soft Focus
**13** - Rectilinear

### 10B SHIELDING

**00** - Not included (Standard)
**11** - Honeycomb Baffle

### 11 WIRING LENGTH

**WL00** - Standard
**WL25** - 25 Ft Leads

### 12 FINISH

Standard Finishes
**BLP**, **BZP**, **WHP**, **SAP**, **BLW**, **BZW**, **WHW**, **VER**
Premium Finishes
**CMG**, **RMG**, **AMG**, **TXF**, **BCM**, **BGE**, **WCP**, **OCP**, **HUG**, **ABP**, **BPP**, **SDS**, **WIR**, **CAP**, **CRM**, **AQW**, **NBP**
Other - RAL
**RAL**
Other - Custom Color
**CUS**
Brass Finishes
**MAB**, **POB**, **MIT**
Stainless Steel Finishes
**MAS**, **POS**

**Compatible Mounting & Power Supply Option Types**

(Configured separately. For the full list of compatible options, please use the "Order Separately" section located on **this product web page**.)



In-grade HP2



Transformer



Universal Power Module





Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

# **VERSA STAR** - Ceiling Recessed - Low Voltage - LED High-Power - Round - Core Drill - Faceplate: Standard

(formerly Versa Star / CD-VS-LED)

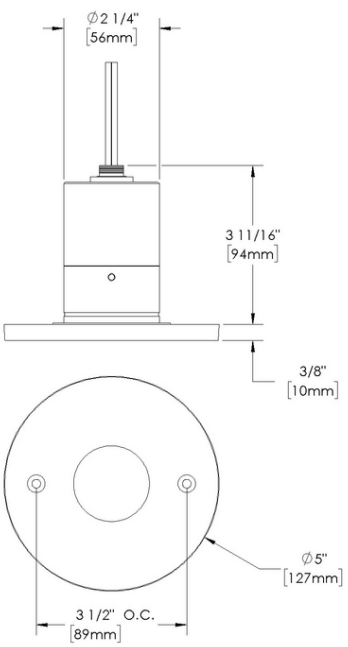











## Finishes

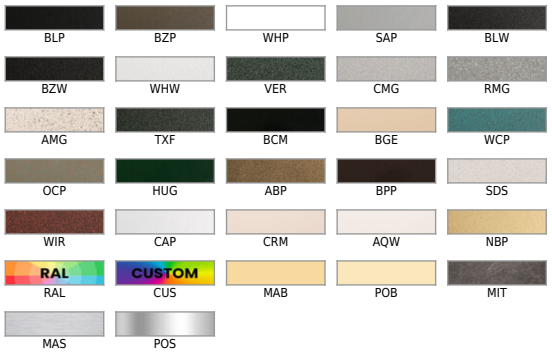


**For more detailed information and visuals regarding our finishes, visit www.bklighting.com/finishes**



Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

# **VERSA STAR** - Ceiling Recessed - Low Voltage - LED High-Power - Round - Core Drill - Faceplate: Standard

(formerly Versa Star / CD-VS-LED)

IP66

## Features



Anti-condensation vent allows moisture to exit the fixture but never enter in



Lens factory adhered to fixture cap providing hermetically sealed optical compartment



Secured with flush, countersunk tamper resistant hardware




Machined solid billet faceplate provides unmatched strength and durability



Manufactured in the USA with sustainable processes



Water-tight anti-siphon plug prevents moisture ingress from wireways



Easily replaceable modular components reduce waste and extend fixture life



Solid billet fixture body provides unmatched durability and heat management

## Technical

**Driver**: Low Voltage

**Light Source (Type)**: LED High-Power

**Material**: Aluminum, Brass, Stainless Steel

**CCT (K)**: Amber, 2700, 3500, 3000, 4000

**CRI**: 80, 90

**Input Power (W)**: 7

**Delivered Lumens (lm)**: 260 - 524

**Beam Angle (°)**: 13, 16, 23, 31

**Control**: MLV dimming capable via compatible remote magnetic transformer. See Mountings & Power Supplies section to order.

**Shape**: Round

**Mount**: Core Drill

**Style**: Faceplate: Standard

**Input Voltage**: 12V

**Lens**: Soft Focus, Rectilinear

**Shielding**: Not included (Standard), Honeycomb Baffle

**Wiring Length**: Standard

**Finish**: Standard Finishes, Premium Finishes, Other - RAL, Other - Custom Color, Brass Finishes, Stainless Steel Finishes

**IP Rating**: IP66 rated

**Weight (lbs)**: 1.51 - 2.42

**Source to Lens Distance (in)**: 0.77

**Body**: Unibody design, with enclosed, water-proof wireway and integral heat sink, fully machined from solid billet.

**Material Detail**: Furnished in stainless steel (304)., Furnished in brass (360)., Furnished in copper-free aluminum (6061-T6).

**Faceplate**: Fully machined from solid billet. Countersunk holes provide for flush hardware mounting. Accommodates two (2) lens or louver media.

**Light Source Detail**: High power LEDs modular design with electrical disconnects., Adjust-e-Lume, an LED board feature, allows for dynamic lumen response at the individual fixture. Indexed (100% to 25% nom.) lumen output. Maintains output at desired level or may be changed (A9 to A1). Standard preset from the factory is A9 (100%).

**Optics**: Interchangeable optics permit changes in the field.

**Hardware**: Mount with two (2) #10 fasteners as required (hardware not included). Length and type of mounting screws will vary with construction material.

**Sealing**: High temperature silicone ‘O’ Ring in fixture knuckle provides water-tight seal at joint.

**Finish Detail**: Powder coat or metal finish options available for brass material., Metal finish option only for stainless steel material., StarGuard, our 15-stage chromate-free process, cleans and conversion coats aluminum components prior to application of Class ‘A’ TGIC polyester powder coating. It is RoHS compliant.

**Warranty**: 5-year limited warranty.

**Certification**: Made in USA, UL Listed, Suitable for Wet Locations

**WARNING: This is a low voltage product. Please check "Mountings With A Power Supply" or "Power Supplies" to order remote transformer separately.**



Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Updated 11/02/2026

# **VERSA STAR** - Ceiling Recessed - Low Voltage - LED High-Power - Round - Core Drill - Faceplate: Standard

(formerly Versa Star / CD-VS-LED)

## Light Source

### Configure your product to display exact performance values

| Light Source | Optic | Beam Angle | CCT (K) | CRI | Input Power (W) | Delivered Lumens (Lm) | CBCP |
|---|---|---|---|---|---|---|---|
| - | - | - | - | - | - | - | - |

### Without selecting your configuration

| Light Source | Optic | Beam Angle | CCT (K) | CRI | Input Power (W) | Delivered Lumens (Lm) | CBCP |
|---|---|---|---|---|---|---|---|
| **e64** | NSP - Narrow Spot | 13° | 2700 | 80 | 7 | 456 | 5993 |
| **e64** | SP - Spot | 16° | 2700 | 80 | 7 | 445 | 4546 |
| **e64** | SP2 - Spot | 23° | 2700 | 80 | 7 | 397 | 1726 |
| **e64** | MFL - Medium Flood | 31° | 2700 | 80 | 7 | 399 | 1131 |
| **e65** | NSP - Narrow Spot | 13° | 3000 | 80 | 7 | 466 | 6131 |
| **e65** | SP - Spot | 16° | 3000 | 80 | 7 | 455 | 4650 |
| **e65** | SP2 - Spot | 23° | 3000 | 80 | 7 | 406 | 1766 |
| **e65** | MFL - Medium Flood | 31° | 3000 | 80 | 7 | 409 | 1157 |
| **e66** | NSP - Narrow Spot | 13° | 4000 | 80 | 7 | 524 | 6889 |
| **e66** | SP - Spot | 16° | 4000 | 80 | 7 | 511 | 5225 |
| **e66** | SP2 - Spot | 23° | 4000 | 80 | 7 | 456 | 1984 |
| **e66** | MFL - Medium Flood | 31° | 4000 | 80 | 7 | 459 | 1300 |
| **e74** | NSP - Narrow Spot | 13° | Amber | | 7 | 299 | 3927 |
| **e74** | SP - Spot | 16° | Amber | | 7 | 291 | 2978 |
| **e74** | SP2 - Spot | 23° | Amber | | 7 | 260 | 1131 |
| **e74** | MFL - Medium Flood | 31° | Amber | | 7 | 262 | 741 |
| **e79** | NSP - Narrow Spot | 13° | 2700 | 90 | 7 | | |
| **e79** | SP - Spot | 16° | 2700 | 90 | 7 | | |
| **e79** | SP2 - Spot | 23° | 2700 | 90 | 7 | | |
| **e79** | MFL - Medium Flood | 31° | 2700 | 90 | 7 | | |
| **e80** | NSP - Narrow Spot | 13° | 3000 | 90 | 7 | | |
| **e80** | SP - Spot | 16° | 3000 | 90 | 7 | | |
| **e80** | SP2 - Spot | 23° | 3000 | 90 | 7 | | |
| **e80** | MFL - Medium Flood | 31° | 3000 | 90 | 7 | | |
| **e81** | NSP - Narrow Spot | 13° | 3500 | 80 | 7 | | |
| **e81** | SP - Spot | 16° | 3500 | 80 | 7 | | |
| **e81** | SP2 - Spot | 23° | 3500 | 80 | 7 | | |
| **e81** | MFL - Medium Flood | 31° | 3500 | 80 | 7 | | |



Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com