VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Square - Core Drill - Faceplate: Louvered

(formerly Versa Star / CD-VQL-LED)

Configure

VS - CR - LOD - LHP - ___ - SQ - CD - FLDG - ___ - ___ - ___ - ___ - ___ - ___ - ___

01 02 03 04 05 06A 06B 06C 07 08 10A 10B 11 12

VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Square - Core Drill - Faceplate: Louvered - Pattern G - 0° Angle - Rectangular

01 SERIES

VS - VERSA STAR

02 CATEGORY

CR - Ceiling Recessed

03 DRIVER

LOD - Low Voltage

04 LIGHT SOURCE (TYPE)

LHP - LED High-Power

05 MATERIAL

AL - Aluminum
BR - Brass
SS - Stainless Steel

06A SHAPE

SQ - Square

06B MOUNT

CD - Core Drill

06C STYLE

FLDG - Faceplate: Louvered - Pattern G - 0° Angle - Rectangular

07 LIGHT SOURCE

e64 - 2700K CRI80 - 7W
e65 - 3000K CRI80 - 7W
e66 - 4000K CRI80 - 7W
e74 - Amber - 7W
e79 - 2700K CRI90 - 7W
e80 - 3000K CRI90 - 7W
e81 - 3500K CRI80 - 7W

08 OPTIC

NSP - Narrow Spot (13°)
SP - Spot (16°)
SP2 - Spot (23°)
MFL - Medium Flood (31°)

10A LENS

12 - Soft Focus
13 - Rectilinear

10B SHIELDING

00 - Not included (Standard)
11 - Honeycomb Baffle

11 WIRING LENGTH

WL00 - Standard
WL25 - 25 Ft Leads

12 FINISH

Standard Finishes
BLP, **BZP**, **WHP**, **SAP**, **BLW**, **BZW**, **WHW**, **VER**
Premium Finishes
CMG, **RMG**, **AMG**, **TXF**, **BCM**, **BGE**, **WCP**, **OCP**, **HUG**, **ABP**, **BPP**, **SDS**, **WIR**, **CAP**, **CRM**, **AQW**, **NBP**
Other - RAL
RAL
Other - Custom Color
CUS
Brass Finishes
MAB, **POB**, **MIT**
Stainless Steel Finishes
MAS, **POS**

Compatible Mounting & Power Supply Option Types

(Configured separately. For the full list of compatible options, please use the "Order Separately" section located on **this product web page**.)



In-grade HP2



Transformer




Universal Power Module


Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.


Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Square - Core Drill - Faceplate: Louvered


(formerly Versa Star / CD-VQL-LED)

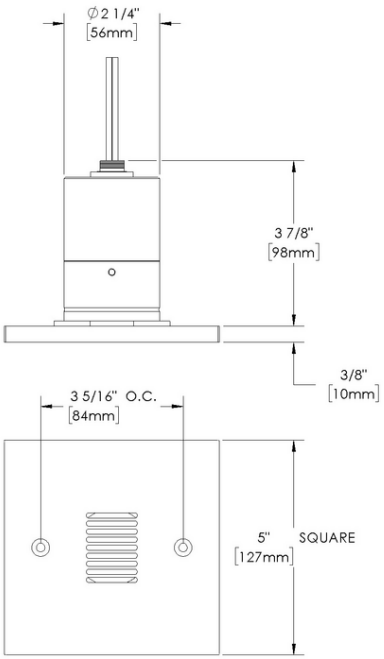



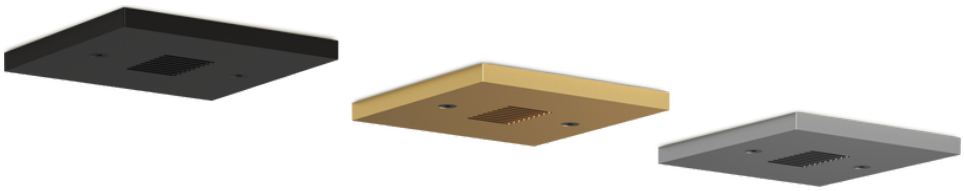

Finishes

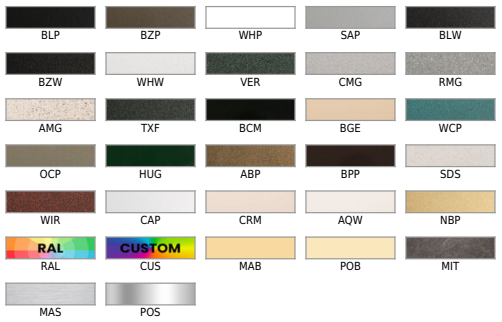

For more detailed information and visuals regarding our finishes, visit www.bklighting.com/finishes

Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Square - Core Drill - Faceplate: Louvered

(formerly Versa Star / CD-VQL-LED)

IP66

Features



Anti-condensation vent allows moisture to exit the fixture but never enter in



Lens factory adhered to fixture cap providing hermetically sealed optical compartment



Secured with flush, countersunk tamper resistant hardware



Machined solid billet faceplate provides unmatched strength and durability



Manufactured in the USA with sustainable processes



Water-tight anti-siphon plug prevents moisture ingress from wireways



Easily replaceable modular components reduce waste and extend fixture life



Solid billet fixture body provides unmatched durability and heat management

Technical

Driver: Low Voltage

Light Source (Type): LED High-Power

Material: Aluminum, Brass, Stainless Steel

CCT (K): Amber, 2700, 3500, 3000, 4000

CRI: 80, 90

Input Power (W): 7

Delivered Lumens (lm): 112 - 284

Beam Angle (°): 13, 16, 23, 31

Control: MLV dimming capable via compatible remote magnetic transformer. See Mountings & Power Supplies section to order.

Shape: Square

Mount: Core Drill

Style: Faceplate: Louvered - Pattern G - 0° Angle - Rectangular

Input Voltage: 12V

Lens: Soft Focus, Rectilinear

Shielding: Not included (Standard), Honeycomb Baffle

Wiring Length: Standard

Finish: Standard Finishes, Premium Finishes, Other - RAL, Other - Custom Color, Brass Finishes, Stainless Steel Finishes

IP Rating: IP66 rated

Weight (lbs): 1.63 - 2.77

Source to Lens Distance (in): 0.77

Body: Unibody design, with enclosed, water-proof wireway and integral heat sink, fully machined from solid billet.

Material Detail: Furnished in stainless steel (304)., Furnished in brass (360)., Furnished in copper-free aluminum (6061-T6).

Faceplate: Fully machined from solid billet. Countersunk holes provide for flush hardware mounting. Accommodates two (2) lens or louver media.

Light Source Detail: High power LEDs modular design with electrical disconnects., Adjust-e-Lume, an LED board feature, allows for dynamic lumen response at the individual fixture. Indexed (100% to 25% nom.) lumen output. Maintains output at desired level or may be changed (A9 to A1). Standard preset from the factory is A9 (100%).

Optics: Interchangeable optics permit changes in the field.

Hardware: Mount with two (2) #10 fasteners as required (hardware not included). Length and type of mounting screws will vary with construction material.

Sealing: High temperature silicone ‘O’ Ring in fixture knuckle provides water-tight seal at joint.

Finish Detail: Powder coat or metal finish options available for brass material., Metal finish option only for stainless steel material., StarGuard, our 15-stage chromate-free process, cleans and conversion coats aluminum components prior to application of Class ‘A’ TGIC polyester powder coating. It is RoHS compliant.

Warranty: 5-year limited warranty.

Certification: Made in USA, UL Listed, Suitable for Wet Locations

WARNING: This is a low voltage product. Please check "Mountings With A Power Supply" or "Power Supplies" to order remote transformer separately.

B-K LIGHTING AMERICAN MADE + EMPLOYEE OWNED | 40429 Brickyard Drive, Madera, CA 93636 | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Updated 11/02/2026

VERSA STAR - Ceiling Recessed - Low Voltage - LED High-Power - Square - Core Drill - Faceplate: Louvered

(formerly Versa Star / CD-VQL-LED)

Light Source

Configure your product to display exact performance values

Light Source	Optic	Beam Angle	CCT (K)	CRI	Input Power (W)	Delivered Lumens (Lm)	CBCP
-	-	-	-	-	-	-	-

Without selecting your configuration

Light Source	Optic	Beam Angle	CCT (K)	CRI	Input Power (W)	Delivered Lumens (Lm)	CBCP
e64	NSP - Narrow Spot	13°	2700	80	7	247	
e64	SP - Spot	16°	2700	80	7	215	
e64	SP2 - Spot	23°	2700	80	7	199	
e64	MFL - Medium Flood	31°	2700	80	7	112	
e65	NSP - Narrow Spot	13°	3000	80	7	253	
e65	SP - Spot	16°	3000	80	7	220	
e65	SP2 - Spot	23°	3000	80	7	204	
e65	MFL - Medium Flood	31°	3000	80	7	115	
e66	NSP - Narrow Spot	13°	4000	80	7	284	
e66	SP - Spot	16°	4000	80	7	247	
e66	SP2 - Spot	23°	4000	80	7	229	
e66	MFL - Medium Flood	31°	4000	80	7	129	
e74	NSP - Narrow Spot	13°	Amber		7		
e74	SP - Spot	16°	Amber		7		
e74	SP2 - Spot	23°	Amber		7		
e74	MFL - Medium Flood	31°	Amber		7		
e79	NSP - Narrow Spot	13°	2700	90	7		
e79	SP - Spot	16°	2700	90	7		
e79	SP2 - Spot	23°	2700	90	7		
e79	MFL - Medium Flood	31°	2700	90	7		
e80	NSP - Narrow Spot	13°	3000	90	7		
e80	SP - Spot	16°	3000	90	7		
e80	SP2 - Spot	23°	3000	90	7		
e80	MFL - Medium Flood	31°	3000	90	7		
e81	NSP - Narrow Spot	13°	3500	80	7		
e81	SP - Spot	16°	3500	80	7		
e81	SP2 - Spot	23°	3500	80	7		
e81	MFL - Medium Flood	31°	3500	80	7		

Copyright © B-K Lighting, Inc. This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com