
CDL3 Shallow Round Fixed




The CDL3 series sets a new standard for high-performance architectural downlighting, offering exceptional quality, versatile functionality, and advanced glare control.


Features

- 2" shallow housing for ceilings with minimal access above
- Four beam spread options with field changeable optics
- Fixed, adjustable, and wall wash versions available
- Nominal 3" aperture, 1" regress, 40 degree cutoff
- Modular design for easy component replacement from below
- Specifiable color temperature. CRI > 90, R9 > 50
- 5 Year, 50,000 hour warranty, damp location rated
- ETL Certified to UL1598, ETL tested to UL2043


Dimensions




Optics



Spot



Narrow Flood



Flood

Representative distribution and peak candela at 10 watts. For other options see order information or IES files here.

coronetled.com
T 973 345 7660

Modification date: October, 2026

Coronet reserves the right to make design changes.

CDL3 Shallow Round Fixed

Ordering Information

For each option group below specify one option. If you don't see your preferred option listed, contact us for help.

Sample Ordering Code:

[CDL3.S-10W-Shape]-**[Module Type-27-SP-NA]**-**[W-F-CL]**-**[IC-Driver-UNV-EMPCK]**

Fixture Type | Module | Trim | Housing

Fixtures can be ordered as one part number or broken up into parts for shipping purposes. Must include the "Fixture Type" (anchor).

1 Fixture ID	2 Output	3 Shape	4 Module Type
CDL3.S	**7W** 845 lumens **10W** 1100 lumens **14W** 1605 lumens	**RD** Round	**FX** Fixed

5 Color Temperature	6 Beam Spread	7 Optical Accesories	8 Trim Finish
22 2200K/90 CRI **27** 2700K/90 CRI **30** 3000K/90 CRI **35** 3500K/90 CRI **40** 4000K/90 CRI	**SP** Spot: 15-degree beam, TIR optic **NFL** Narrow flood: 24-degree beam, TIR optic **FL** Flood: 36-degree beam, TIR optic **WFL** Wide flood: 50-degree beam, TIR optic	**NA** None **DL** Diffusion lens film. Recommended for use with no additional trim lens. **HEX** Hex louver. Recommended for use with no additional trim lens. **LSL** Linear spread lens. Recommended for use with no additional trim lens.	**W** White **BLK** Black **CC** Custom color. See finish options here

9 Trim Type	10 Trim Lenses	11 Housing	12 Driver
F Flange **NT** Mud-in Flange **MW** Millwork. Trimless in millwork. Provide ceiling specifications. Above-ceiling access required.	**SL** Solite lens **CL** Clear lens **FT** Frosted lens **SLHXL** Solite lens with hexel louver **CLHXL** Clear lens with hexel louver **FTHXL** Frosted lens w/ hexel louver **HXL** Hexel louver and no lens **SWRCL** Shower rated clear lens **SWRSL** Shower rated solite lens **SWRFT** Shower rated frosted lens **NA** No lens	**IC** Insulation contact, 14W max **CP** Chicago Plenum, 14W max **IC/AIR** IC Airtight, 14W max	**DBP** Tri-mode driver. 0-10v/forward/reverse phase dimming.

13 Voltage	14 Accessories
UNV Universal (120/277V)	**NA** None **EMPCK** Emergency battery pack. Supplied in remote enclosure prewired to the fixture.

Technical Information

click here or scan QR code

Wiring diagrams, PoE and sensor details
Based on a typically configured 90 CRI, 3500K luminaire using one driver.
For 4000K multiply by 1.05; for 3000K, 0.96; for 2700K, 0.92.


coronetled.com
T 973 345 7660

Modification date: October, 2026

Coronet reserves the right to make design changes.

CDL3 Shallow Round Fixed

Housing Options

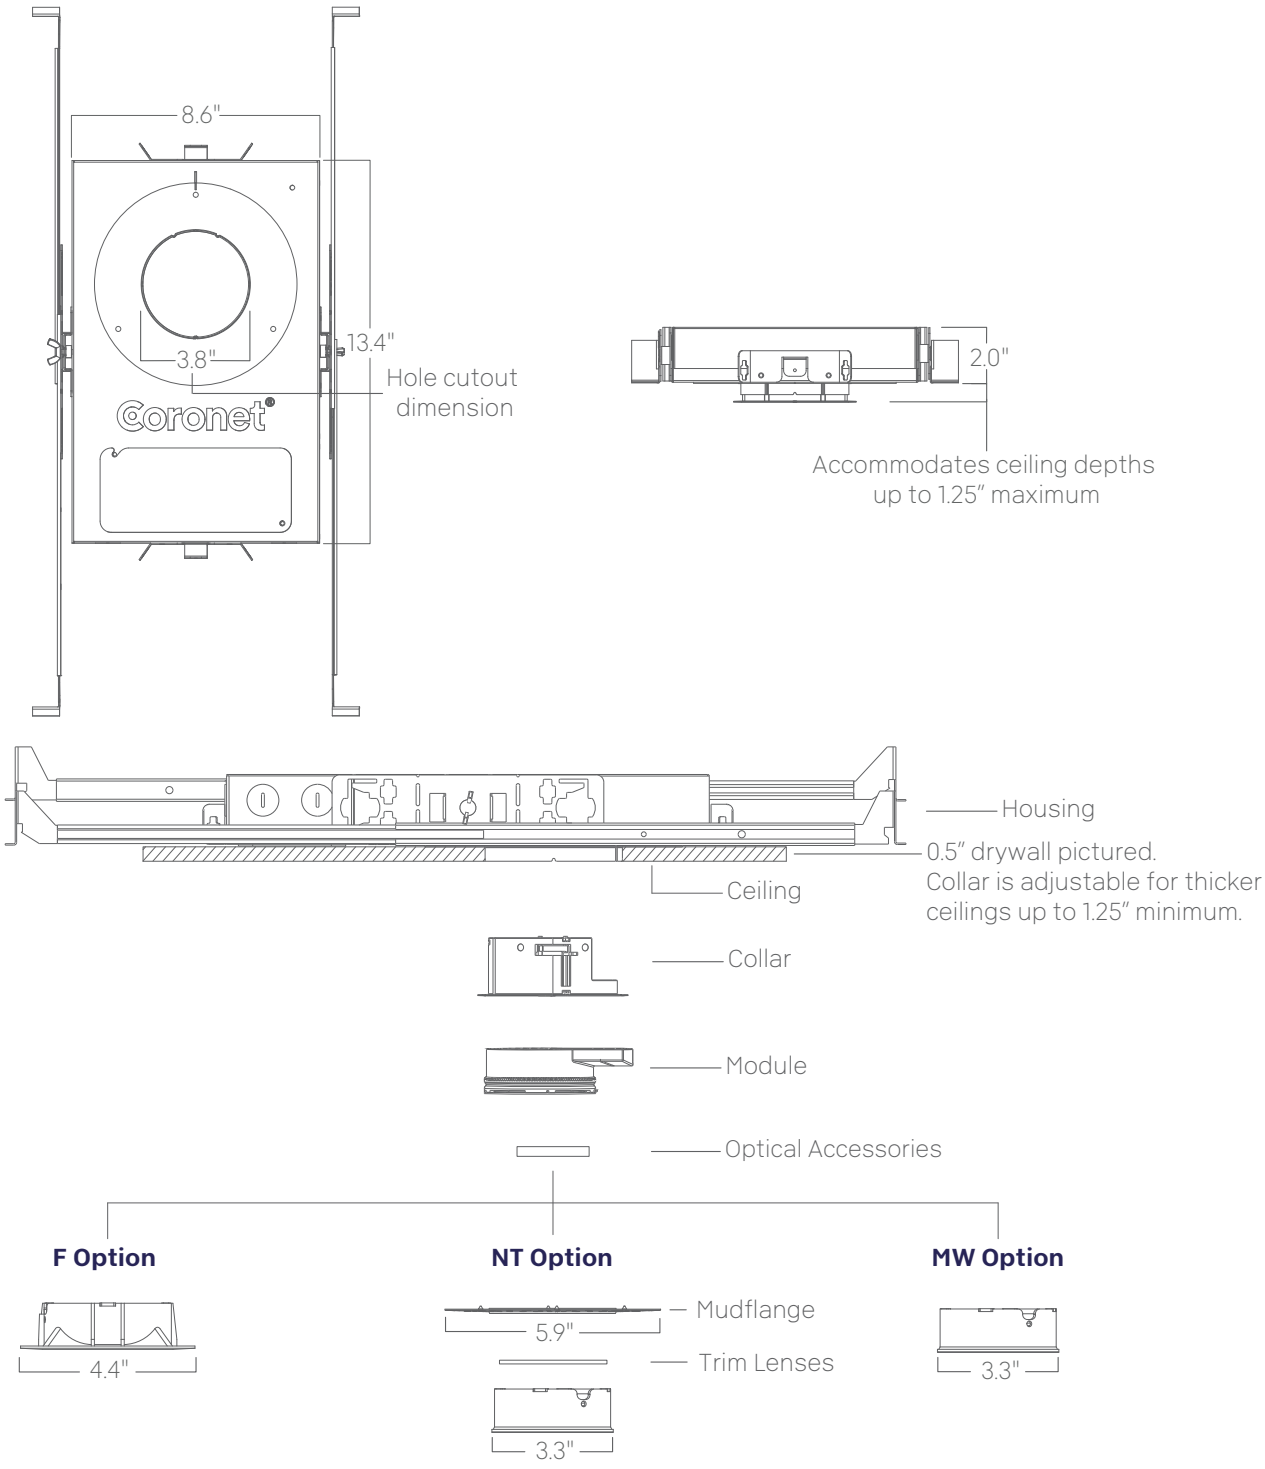

Do not attempt installation if you do not understand the installation instructions.

coronetled.com
T 973 345 7660

Modification date: October, 2026

Coronet reserves the right to make design changes.