
# CDL3 Shallow Round Wall Wash




The CDL3 series sets a new standard for high-performance architectural downlighting, offering exceptional quality, versatile functionality, and advanced glare control.


## Features

- 2" shallow housing for ceilings with minimal access above
- Four beam spread options with field changeable optics
- Fixed, adjustable, and wall wash versions available
- Nominal 3" aperture, 1" regress, 40 degree cutoff
- Modular design for easy component replacement from below
- Specifiable color temperature. CRI > 90, R9 > 50
- 5 Year, 50,000 hour warranty, damp location rated
- ETL Certified to UL1598, ETL tested to UL2043

## Dimensions




## Optics

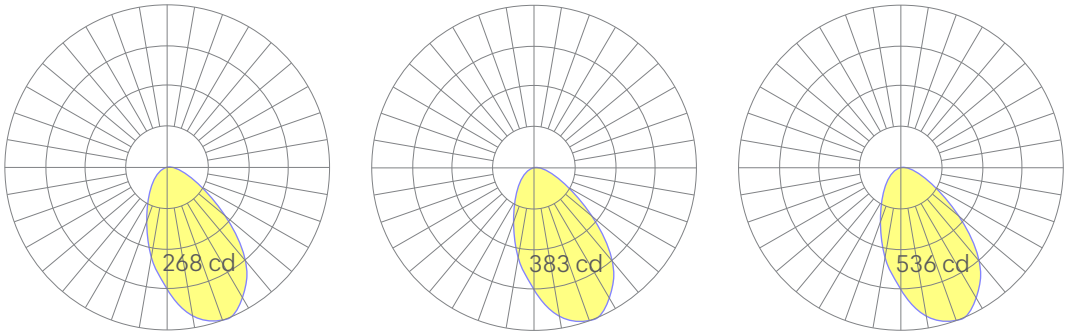


7 Watts | 10 Watts | 14 Watts

Representative distribution and peak candela at 10 watts. For other options see order information or IES files here.



coronetled.com
T 973 345 7660

Modification date: October, 2026

Coronet reserves the right to make design changes.

# CDL3 Shallow Round Wall Wash

## Ordering Information

For each option group below specify one option. If you don't see your preferred option listed, contact us for help.

## Sample Ordering Code:

**[CDL3.S-21W-Shape]-[Module Type-27-WW]-[W-F-WW]-[IC-Driver-UNV-EMPCK]**

Fixture Type | Module | Trim | Housing

Fixtures can be ordered as one part number or broken up into parts for shipping purposes. Must include the "Fixture Type" (anchor).

| 1 Fixture ID | 2 Output | 3 Shape | 4 Module Type |
|---|---|---|---|
| **CDL3.S** | **7W** 590 lumens<br>**10W** 845 lumens<br>**14W** 1180 lumens | **RD** Round | **WW** Wall wash |

| 5 Color Temperature | 6 Beam Spread | 7 Trim Finish | 8 Trim Type |
|---|---|---|---|
| **22** 2200K/90 CRI<br>**27** 2700K/90 CRI<br>**30** 3000K/90 CRI<br>**35** 3500K/90 CRI<br>**40** 4000K/90 CRI | **WWL** Wall wash lens | **W** White<br>**BLK** Black<br>**CC** Custom color<br>See finish options here | **F** Flange<br>**NT** Mud-in Flange<br>**MW** Millwork<br>Trimless in millwork. Provide ceiling specifications. Above-ceiling access required. |

| 9 Trim Lenses | 10 Housing | 11 Driver | 12 Voltage |
|---|---|---|---|
| **WWL** Wall wash lens | **IC** Insulation contact<br>14W max<br>**CP** Chicago Plenum<br>14W max<br>**IC/AIR** IC Airtight<br>14W max | **DBP** Tri-mode driver<br>0-10v/forward/reverse phase dimming. | **UNV** Universal (120/277V) |

| 13 Accessories | |
|---|---|
| **NA** | None |
| **EMPCK** | Emergency battery pack<br>Supplied in remote enclosure prewired to the fixture. |

## Technical Information

click here or scan QR code

Wiring diagrams, PoE and sensor details
Based on a typically configured 90 CRI, 3500K luminaire using one driver.
For 4000K multiply by 1.05; for 3000K, 0.96; for 2700K, 0.92.




coronetled.com
T 973 345 7660

Modification date: October, 2026

Coronet reserves the right to make design changes.

# CDL3 Shallow Round Wall Wash

## Housing Options

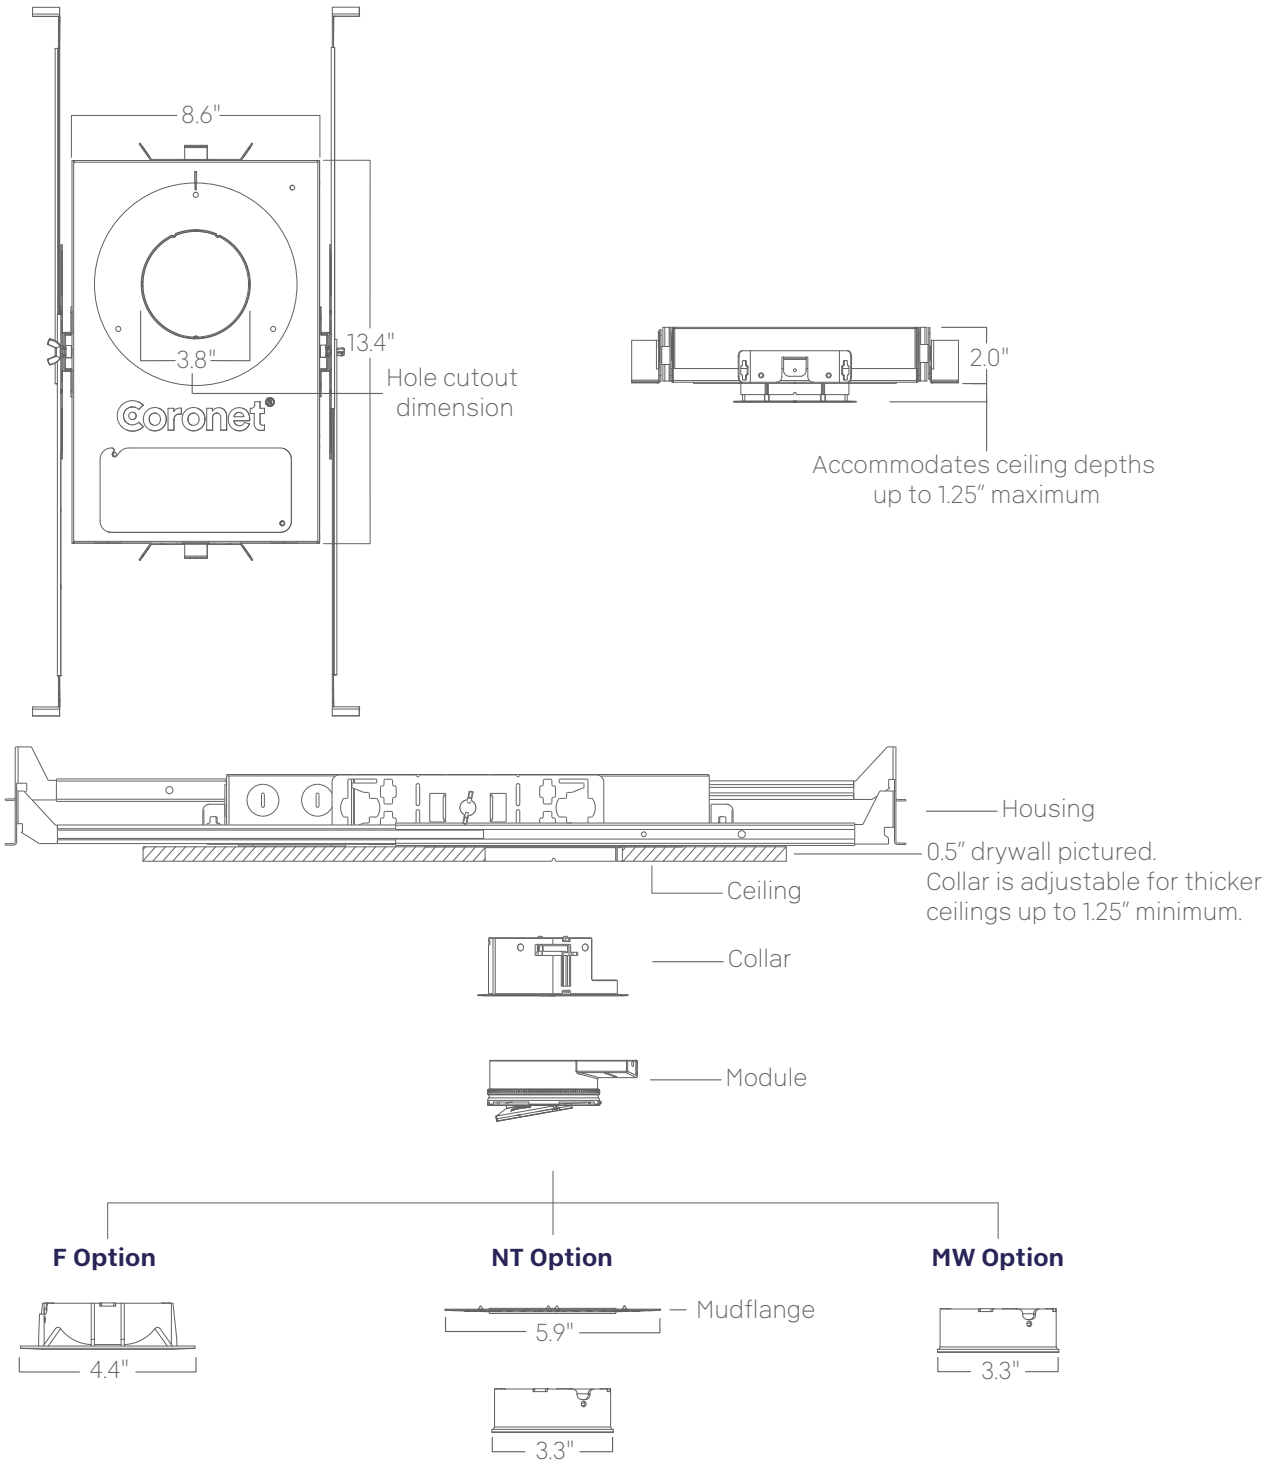


**Do not attempt installation if you do not understand the installation instructions.**



coronetled.com
T 973 345 7660

Modification date: October, 2026
Coronet reserves the right to make design changes.