
CDL3 Shallow Square Wall Wash




The CDL3 series sets a new standard for high-performance architectural downlighting, offering exceptional quality, versatile functionality, and advanced glare control.


Features

- 2" shallow housing for ceilings with minimal access above
- Four beam spread options with field changeable optics
- Fixed, adjustable, and wall wash versions available
- Nominal 3" aperture, 1" regress, 40 degree cutoff
- Modular design for easy component replacement from below
- Specifiable color temperature. CRI > 90, R9 > 50
- 5 Year, 50,000 hour warranty, damp location rated
- ETL Certified to UL1598, ETL tested to UL2043

Dimensions



Optics

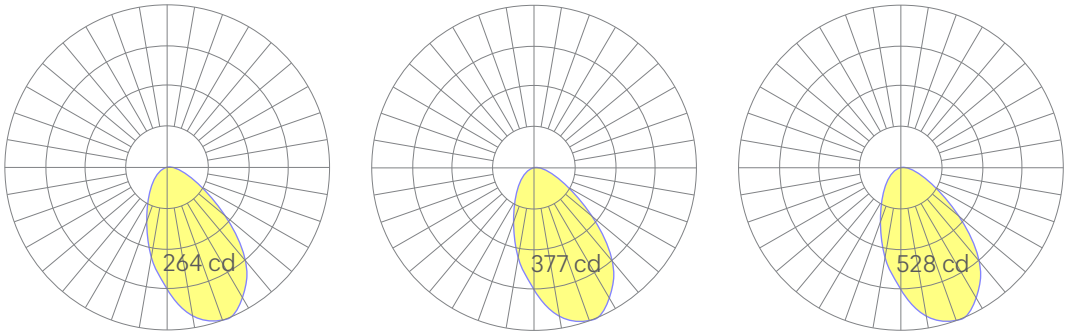

7 Watts | 10 Watts | 14 Watts

Representative distribution and peak candela at 10 watts. For other options see order information or IES files here.

coronetled.com
T 973 345 7660

Modification date: October, 2026

Coronet reserves the right to make design changes.

CDL3 Shallow Square Wall Wash

Ordering Information

For each option group below specify one option. If you don't see your preferred option listed, contact us for help.

Sample Ordering Code:

[CDL3.S-21W-Shape]-[Module Type-27-WW]-[W-F-WW]-[IC-Driver-UNV-EMPCK]

Fixture Type | Module | Trim | Housing

Fixtures can be ordered as one part number or broken up into parts for shipping purposes. Must include the "Fixture Type" (anchor).

1 Fixture ID	2 Output	3 Shape	4 Module Type
CDL3.S	**7W** 600 lumens **10W** 855 lumens **14W** 1195 lumens	**SQ** Square	**WW** Wall wash

5 Color Temperature	6 Beam Spread	7 Trim Finish	8 Trim Type
22 2200K/90 CRI **27** 2700K/90 CRI **30** 3000K/90 CRI **35** 3500K/90 CRI **40** 4000K/90 CRI	**WWL** Wall wash lens	**W** White **BLK** Black **CC** Custom color See finish options here	**F** Flange **NT** Mud-in Flange **MW** Millwork Trimless in millwork. Provide ceiling specifications. Above-ceiling access required.

9 Trim Lenses	10 Housing	11 Driver	12 Voltage
WWL Wall wash lens	**IC** Insulation contact 14W max **CP** Chicago Plenum 14W max **IC/AIR** IC Airtight 14W max	**DBP** Tri-mode driver 0-10v/forward/reverse phase dimming.	**UNV** Universal (120/277V)

13 Accessories	
NA	None
EMPCK	Emergency battery pack Supplied in remote enclosure prewired to the fixture.

Technical Information

click here or scan QR code

Wiring diagrams, PoE and sensor details
Based on a typically configured 90 CRI, 3500K luminaire using one driver.
For 4000K multiply by 1.05; for 3000K, 0.96; for 2700K, 0.92.

coronetled.com
T 973 345 7660


JA8 TITLE 24 · UNION MADE IN THE USA · Suitable for Damp Locations · Intertek

Modification date: October, 2026

Coronet reserves the right to make design changes.

CDL3 Shallow Square Wall Wash

Housing Options

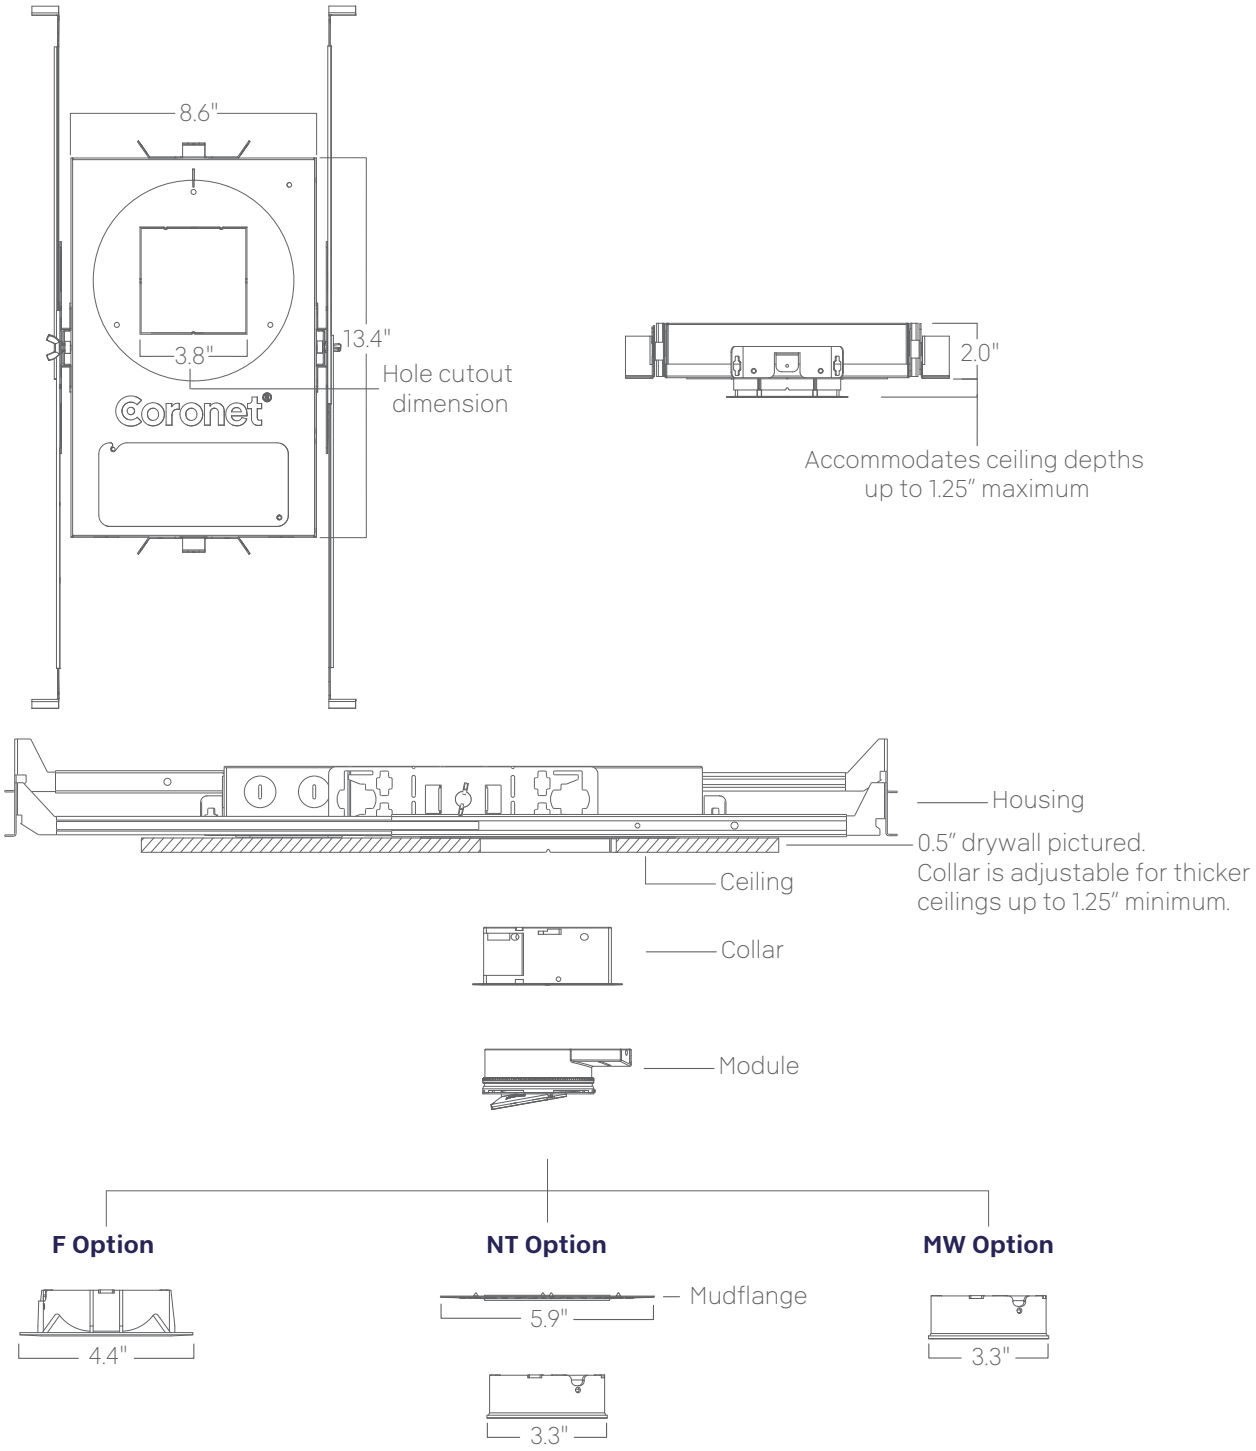

Do not attempt installation if you do not understand the installation instructions.

coronetled.com
T 973 345 7660

Modification date: October, 2026

Coronet reserves the right to make design changes.