Project Name:	Type:
Part Number:	Date:

GREENCREATIVE

CCT SELECT DIRECT PL

FEATURES

- Plug & Play – Easy to install
- Replaces G24q & GX24q (4-pin) 26W CFL lamps
- Compatible with most electronic ballasts (120-277V)
- SelectKelvin technology - field selectable color temperature in 3000K, 3500K, and 4000K
- 0-10V dimmable (ballast dependent)*
- Available in Horizontal & Vertical installation design
- 310° rotatable base allows light to be directed as needed and maximize performance in fixture (Horizontal installation models)
- Exceptional high efficacy up to 124 LPW
- Shatter-resistant plastic construction for durable protection
- Suitable for damp locations
- UL Listed
- Lamp ambient temperature: -4°F to 113°F (-20°C to 45°C)
- Fixture operating temperature: -4°F to 95°F (-20°C to 35°C)
- Rated lifetime (L70): 50,000hrs
- 5 year limited warranty** / 10 year available (see EXTENDED WARRANTIES table for information)
- NSF (National Sanitation Foundation) certified for Food Zone (Non-Contact), Splash, and Non-Food Zones




DIGITAL NAVIGATION

Explore the spec sheet through the links below

BALLAST PERFORMANCE
DIMENSION & WEIGHT
MINIMUM COMPARTMENT DIMENSIONS
LOGISTIC INFORMATION
EXTENDED WARRANTIES
CERTIFICATION INFORMATION

FOCUS FEATURE

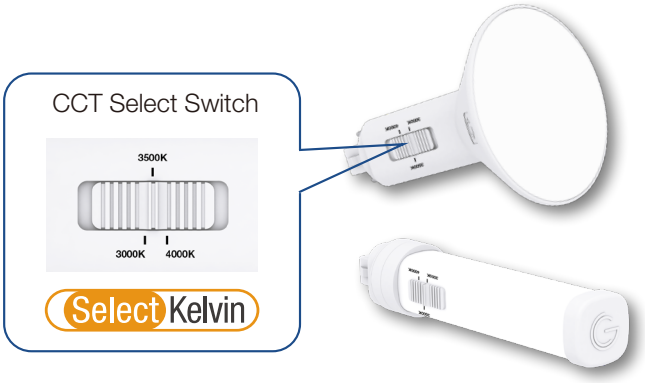



3000K
WARM WHITE LIGHT

3500K
NEUTRAL WHITE LIGHT

4000K
COOL WHITE LIGHT

SPECIFICATIONS

Product	Model	Equiv.	Input Voltage	Wattage (W)	CCT	Lumens	Efficacy (LPW)	CRI	Power Factor	THD	Beam Angle	Dim.*	Fixture Rating	DLC	DOE
37086	8.5PLH/8CCTS/DIR	26W	120-277V	8.5	3000K	1,000	118	82	0.9	<20%	110°	Yes	Non-Enclosed	√	√
					3500K	1,000	118								
					4000K	1,050	124								
37087	9.5PLV/8CCTS/DIR	26W	120-277V	9.5	3000K	1,100	116	82	0.9	<20%	120°	Yes	Non-Enclosed	√	√
					3500K	1,150	121								
					4000K	1,150	121								

FOOTNOTES:
* Ballast Dependent. Please refer to www.greencreative.com for full ballast and dimmer compatibility list.
** Please visit www.greencreative.com for Limited Warranty terms.


Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.

CCT SELECT DIRECT PL

BALLAST PERFORMANCE

Model	Ballast Type	Bare Lamp Wattage	System Wattage	3000K Lumens	3500K Lumens	4000K Lumens
8.5PLH/8CCTS/DIR	18W	5.5	8.5	760	760	800
	26W	8.5	11	1,000	1,000	1,050
	42W	10	13	1,100	1,100	1,150
9.5PLV/8CCTS/DIR	18W	6.5	9	850	880	880
	26W	9.5	12	1,100	1,150	1,150
	42W	11.5	14.5	1,200	1,250	1,250



DIMENSION & WEIGHT

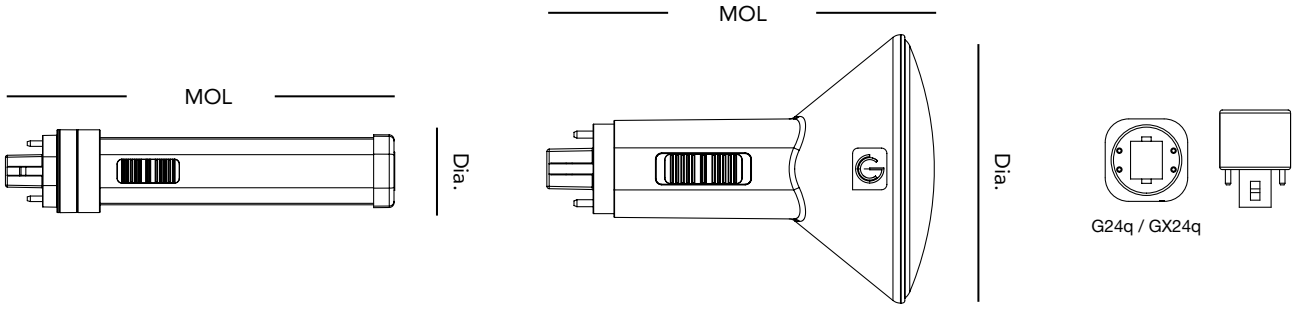

Model	Compatible Base	MOL	Dia.	Weight
8.5PLH/8CCTS/DIR	G24q & GX24q	6-3/8"	1-3/8"	0.16 lb
9.5PLV/8CCTS/DIR		5-1/8"	3-9/16"	0.22 lb

MINIMUM COMPARTMENT DIMENSIONS

Note – the base of this lamp is 1-3/8" by 1-3/8" and the opening in the reflector should be a minimum of 1-3/8" by 1-3/8" to insure a proper fit. For non-enclosed rated applications the minimum compartment must follow the below guidelines.

Non-enclosed Fixture Horizontal Installation 	Model Number		8.5PLH/8CCTS/DIR
	Lamp Compartment Dimensions	Diameter	6-1/8"
		Height	4-3/4"
	Maximum Lamps in Luminaire		2
	Lampholder-to-Lampholder Spacing		3/8"
Non-enclosed Fixture Vertical Installation 	Model Number		9.5PLV/8CCTS/DIR
	Lamp Compartment Dimensions	Diameter	6-5/16"
		Height	9-1/16"
	Maximum Lamps in Luminaire		1

Product warranty is defined based on the condition of above minimum compartment size, maximum lamps in glass/metal luminaire.

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.

CCT SELECT DIRECT PL

LOGISTIC INFORMATION

Model	Master Carton			Shipping Carton		
	Case Qty	Case Dimensions (LxWxH)	Case Weight	Case Qty	Case Dimensions (LxWxH)	Case Weight
8.5PLH/8CCTS/DIR	6PCS	6-3/4" x 4-5/8" x 3-1/4"	1.21 lb	24PCS	13-7/8" x 9-15/16" x 4-3/4"	5.29 lb
9.5PLV/8CCTS/DIR	6PCS	11-1/4" x 7-1/2" x 5-1/2"	2.2 lb	24PCS	30-11/16" x 12-1/4" x 6-15/16"	10.14 lb

EXTENDED WARRANTIES***

Model	Description
8.5PLH/8CCTS/DIR/10YEARWARRANTY	10 Year warranty for 8.5PLH/8CCTS/DIR
9.5PLV/8CCTS/DIR/10YEARWARRANTY	10 Year warranty for 9.5PLV/8CCTS/DIR

FOOTNOTES:
*** Warranty based on a maximum of 4,368 annual operating hours (per year for ten years) and exposure to a maximum ambient temperature of 80°F / 27°C.

CERTIFICATION INFORMATION

Product	Model	DLC ID
37086	8.5PLH/8CCTS/DIR	S-YMB1WT
37087	9.5PLV/8CCTS/DIR	S-8GTA4S

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.