



KTLD-60-UV-12V

CONSTANT VOLTAGE LED DRIVER

Version A4

DESCRIPTION

LED Driver | 60W Dual Channel | 12V Constant Voltage Output | 120-277V Input



TOTAL POWER: 60W	SAFETY COMPLIANCE: UL 8750
INPUT VOLTAGE: 120~277Vac ±10%	LOCATION TYPE: IP20 design for dry and damp location
INPUT FREQUENCY: 50/60 Hz	OUTPUT VOLTAGE: 12V
NUMBER OF OUTPUTS: One	WARRANTY: 5 Years

ELECTRICAL SPECIFICATIONS

Input Voltage Range	120~277Vac ± 10%
Frequency	50/60 Hz
Power Factor	> 0.9 under 120~277Vac input with 80~100% Load Condition (for all output voltage)
Inrush Current	<60Apeak @120VAC
Max. Input Current	0.65A @120V
THD	<20% at 277VAC input with 100% Load Condition
Load Regulation	± 2%
Line Regulation	± 1%
Voltage Tolerance	± 5% at full load condition
Turn-On Delay Time	< 0.7s at full load condition
Overshoot	< 10% at full load condition
No Load Power Consumption	< 1.5W
Ripple and Noise (pk-pk)	< 5%
Withstand Voltage	Input to output, 2,800Vdc, 2mA
Leakage Current	Maximum 0.5mA at 277Vac, 60Hz input
Protection	<ul style="list-style-type: none"> Over Voltage Protection: Hiccup mode. Protection will trigger when load voltage exceeds specified output voltage and will auto recover after the fault mode is removed. Over Current Protection: Hiccup mode. Protection will trigger when load current exceeds specified output current and will auto recover after the fault mode is removed. Short Circuit Protection: Hiccup mode. Protection will trigger when short circuited and will auto recover after the fault mode is removed.

PRODUCT SPECIFICATIONS

Catalog Number	Max. Output Power	Output Current	Output Voltage	OCV	Typical Efficiency at 120V	Typical Efficiency at 240V	Typical Efficiency at 277V	Remote Mounting Distance (#18 AWG)	Class 2	
									US	Canada
KTLD-60-UV-12V	60W	5A	12V	16V	84%	85%	86%	19 ft	✓	✓

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-20°C/-4°F to 55°C/131°F
Storage Temperature	-40°C/-40°F to 85°C/185°F
Humidity	5% to 95%
MTBF	>300,000 hours at 25°C/77°F ambient (~70°C/~158°C case temp)
Life Rating	85,000 hours at 120Vac input, 100% load and 60°C/140°F case temperature
Maximum Case Temperature	85°C/185°F

SAFETY AND EMC COMPLIANCE

UL/cUL	UL 8750
CE	EN61347-1, EN61347-2-13
FCC, 47CFR Part 15	ANSI C63.4:2009 Class B (consumer limit)
EN61000-3-2	Harmonic Current Emissions Class C




KTLD-60-UV-12V


CONSTANT VOLTAGE LED DRIVER

Version A4

PHYSICAL SPECIFICATIONS

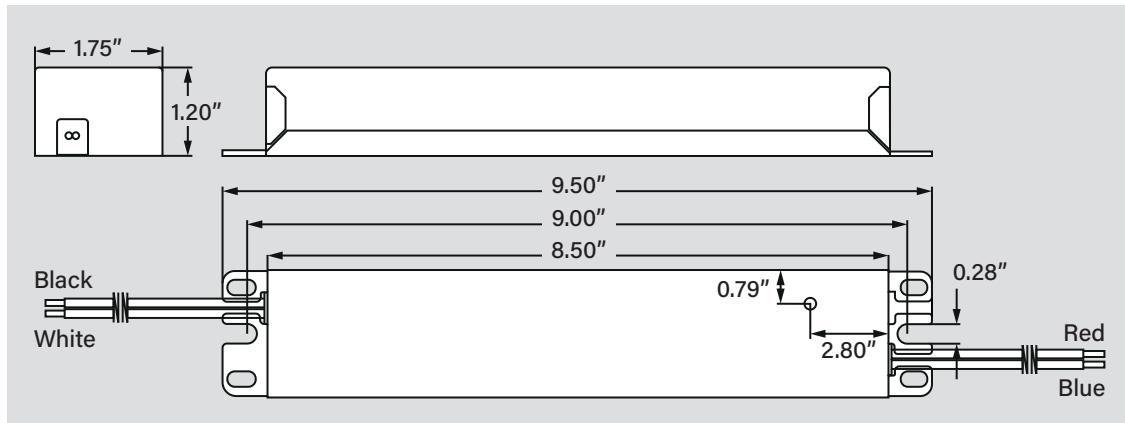

WIRING DIAGRAM

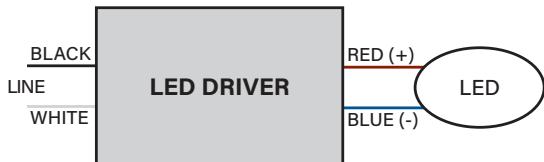

WIRING SPECIFICATIONS

INPUT	12", UL 1316 #18AWG (black and white)
OUTPUT	12", UL 1316 #16AWG (red and blue)

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTLD-60-UV-12V	Carton Pack	10	Active

CATALOG NUMBER BREAKDOWN

KTLD-60-UV-12V

1

2

3

4

1 Keystone Technologies LED Driver

2 Max Output Wattage

3 120-277V Input

4 Output Voltage