ABRA Neoteric Lighting Design


Assembly and Installation Instructions for Model's

30005FM

CAUTION - RISK OF FIRE

Installation of this fixture should be done by a licensed electrician or by a person familiar with local electrical codes and the construction and operation of this fixture.

Warning please make sure the electrical breaker is shut off before commencing with this installation

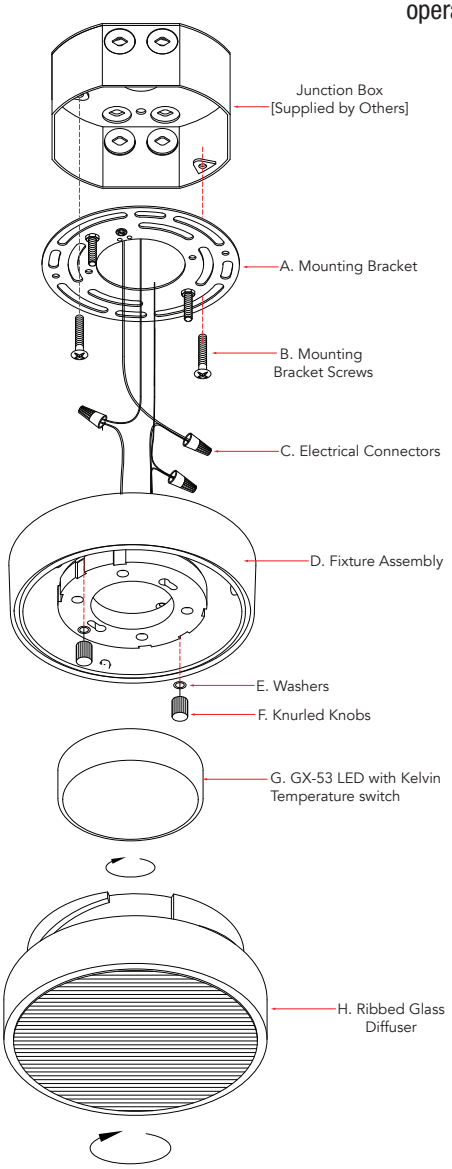

Package Contents

Part	Description	
A	Mounting bracket	1
B	Mounting bracket screws	2
C	Electrical connectors	3
D	Fixture assembly	1
E	Washers	2
F	Knurled knobs	2
G	GX-53 LED	1
H	Ribbed glass diffuser	1

Installing the fixture

please ensure the electrical breaker is in the Off position before commencing

1	Attach the Mounting bracket **(A)** to the Junction Box [Supplied by Others] using the Mounting bracket screws **(B).**
2	Connect the supply wires to the fixture wires using the supplied electrical wire connectors **(C)**. White supply wire to the White fixture wire, Black supply wire to Black fixture wire and the ground Bare Copper or Green wire to the Green fixture wire. Once the electrical wire connectors are securely fastened it is recommended to tape these connectors with electrical tape.
3	Secure the Fixture assembly **(D)** to the Mounting bracket **(A)** by screwing the Washers **(E)**, and Knurled knobs **(F)** onto the Threaded rods attached to the Mounting bracket.
4	Set the desired Kelvin temperature on the back of the GX-53 LED module **(G)** and twist to lock into place inside of the Fixture assembly **(D)**.
5	Place the Ribbed Glass diffuser **(H)** into the Fixture assembly **(D)** and twist to secure in place.
6	Switch on the electrical breaker switch and your new fixture is ready for many years of trouble free use.