

ATLAS

LED Light Fixture, 1200-3200 Lumens, 15-32 Watts
Track, Surface and Suspended

Description

ATLAS series is a high performance LED luminaire with powerful output of up to 3200 lumens, 95 CRI and smooth sharp cylindrical body with no visible heat sink. Lower energy consumption with crisp, precise CCT, beam control with excellent CRI for various lighting applications, from residential to retail lighting.

Features

Body

Constructed of aluminum, the body features an aesthetically pleasing smooth cylindrical shape.

LED Characteristics

High powered CREE® LED array maintains uniform intensity with a typical luminous flux up to 3200 lumens, with a typical CRI of 95.

Beam Spread

Fixture lens options available in 15°, 25°, 40° and 60° beam spread.

Mounting Options

1- or 2-circuit track connectors for track

applications (compatible with A-Line, 2- and 3-circuit Powergear, H-style, L-style and Liteline tracks).

Operating Conditions

For indoor use only.

Quickship Made-To-Order

Made-To-Order products ship within seven business days of an order being released.

Job Information


Project Name	
Type	
Location	
Quantity	
Date	



SPECIFICATION

Approved Location	Dry / Indoor
Beam Angle	15° / 25° / 40° / 60°
CCT	2700 K - 3000 K - 3500 K - 4000 K
Certification	cETLus
Class II	Yes
Color	BK / SL / WH
CRI	95
Dimming	Yes
Dimming Tech	TRIAC/ELV @ 120V
Lumens	Up to 3200
Lumens per Watt	Up to 100
Power Factor	0.99
Primary Voltage	120V-277V ¹
Projected Life	70% @ 50,000 hrs
Warranty	5 years
Wattage	15 W / 23 W / 32 W

Technical Drawings

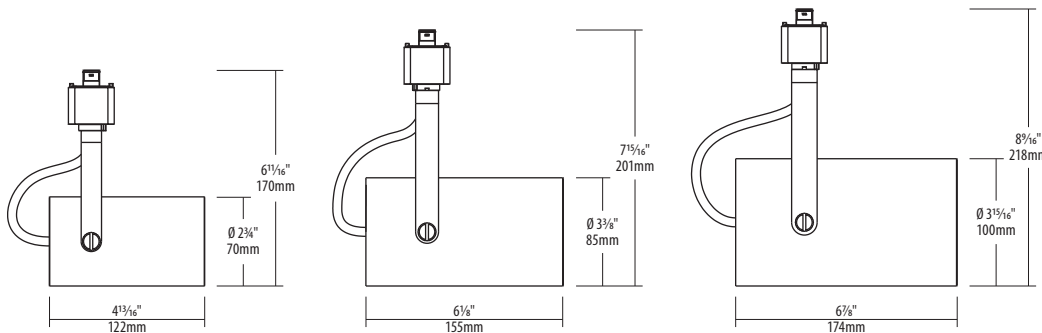

Ordering Guide

Connector Type	Size	Color Temperature	Beam Angle	Finish	Input Voltage ¹	Pendant Style ^{2,3,6}
ATLS						
A : A-Line (ATK Track 120V)	15 : 15W (1200lm)	27 : 2700 K ⁴	15 : 15°	BK : Black	1 : 120V	Leave blank for no rod
H : H-style (120V)	23 : 23W (1800lm)	30 : 3000 K	25 : 25°	WH : White	2 : 120-277V	2 : 2" stem rod
L : L-style (120V)	32 : 32W (3200lm)	35 : 3500 K	40 : 40°	SL : Silver ⁵		3 : 3" stem rod
LL : Liteline (TK Track 120V) ⁶		40 : 4000 K ⁴	60 : 60°			12 : 12" stem rod
P2 : 2-Circuit Powergear (120-277V) ⁶						18 : 18" stem rod
P3 : 3-Circuit Powergear (120-277V) ⁶						24 : 24" stem rod
						36 : 36" stem rod
						48 : 48" stem rod



Highlighted option denotes Quickship.

Notes:

¹ Input voltage must comply with the Track system; for options A, H, L, LL – 120V only, for options P2, P3 – 120-277V. ² ROD length can be customized with one more ROD only. ³ Stem sizes 2", 3" available in BK, FWH and WH; stem sizes 12" - 48" available in BK, BN, FWH and WH. ⁴ Color Temperatures 2700 K and 4000 K for QUICKSHIP program available with 15W and 23W only. ⁵ SL finish for QUICKSHIP program available with 23W only. ⁶ For LL, P2, P3 connector types in combination with ROD part number will exclude "-" between Finish and Input voltage. Example Quickship option is available on orders of 100 pieces or less, and will ship within 7 business days. Options must be selected from Quickship section to qualify. Accessories are sold separately. For additional options please consult your Liteline representative. Due to our continued efforts to improve our products, product specifications are subject to change without notice.