
Digital LED strip K-DL-1229-24

Ref. K-DL-1229-24

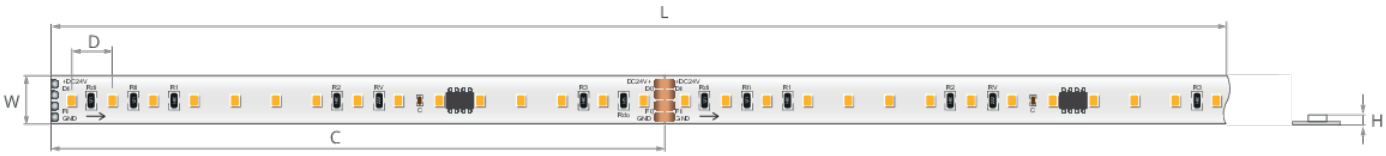

- Digital control capability
- Narrow width
- Possibility to independently control each cutting module

TECHNICAL SPECIFICATIONS

IP protection rating	**20**
CRI	**90**
Working temperature	**-20°C - 60°C**
Input voltage	**24 V DC**
Power consumption	**12.29 W/m**
Beam angle	**120°**
Height [H]	**1.8 mm**
Width [W]	**10 mm**
Cut every [C]	**200 mm**
LED spacing [D]	**8.33 mm**
Number of LEDs per 1 m	**120**
Number of LEDs per cut section	**24 pcs**
Max run length [L]	**10 m**
Energy consumption	**9.4 kWh/1000h**
Does not contain mercury and lead	**yes**
Dimmable	**yes**
No UV IR radiation	**yes**
Warranty [months]	**60**

Color temperature	Lumen output	Efficiency	Ref
3000 K	655 lm/m	53 lm/W	**K-DL30-1229-24**
4000 K	690 lm/m	56 lm/W	**K-DL40-1229-24**