Digital LED strip K-DLRGB40-2246-24

Ref. K-DLRGB40-2246-24

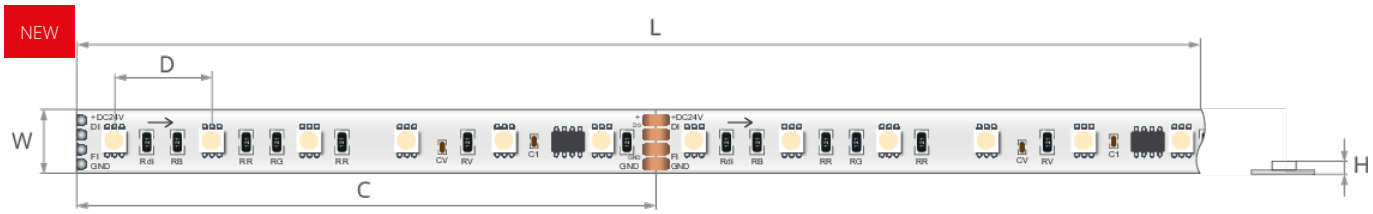

- Digital control capability
- High density diode placement
- Narrow width
- Possibility to independently control each cutting module

TECHNICAL SPECIFICATIONS

IP protection rating	**20**
CRI	**90**
Only valid for white	**yes**
Lumen output	**310 lm/m** **126 lm/m** **285 lm/m** **70 lm/m**
Working temperature	**-20°C - 60°C**
Input voltage	**24 V DC**
Power consumption	**22.46 W/m**
Beam angle	**120°**
Height [H]	**2.2 mm**
Width [W]	**12 mm**
Length [L]	**5000 mm**
Cut every [C]	**83.3 mm**
LED spacing [D]	**13.9 mm**
Number of LEDs per 1 m	**72**

Number of LEDs per cut section	**5 pcs**
Max run length [L]	**3 m**
Energy consumption	**22.5 kWh/1000h**
Does not contain mercury and lead	**yes**
Dimmable	**yes**
No UV IR radiation	**yes**
Warranty [months]	**48**

Color temperature	Efficiency
4000 K RED GREEN BLUE	**14 lm/W**

RELATED ACCESSORIES > ELECTRONICS

Digital LED strip K-DLRGB40-2246-24

Ref. K-DLRGB40-2246-24

Name	IP protection rating	Ref.
Power supply ND-30-24	66	ND-30-24
Power supply ND-60-24	66	ND-60-24
Power supply ND-96-24	66	ND-96-24