
Digital LED strip KWP-GDL-1229-24

Ref. KWP-GDL-1229-24

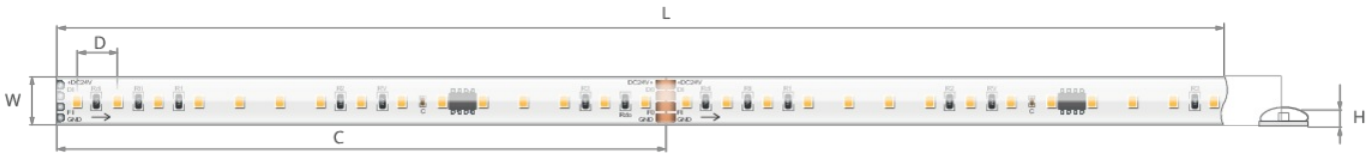

CRI 90+ | IP65 | Pb Hg | 24 V | c UL us LISTED | CE | UKCA | RoHS COMPLIANT | 4 YEARS WARRANTY

- Digital control capability
- For the construction of sealed lighting fixtures
- Narrow width
- Possibility to independently control each cutting module

TECHNICAL SPECIFICATIONS

IP protection rating	**65**
Sealing type	**gel cover**
CRI	**90**
Working temperature	**-20°C - 60°C**
Input voltage	**24 V DC**
Power consumption	**12.29 W/m**
Beam angle	**120°**
Height [H]	**3 mm**
Width [W]	**10 mm**
Cut every [C]	**125 mm**
LED spacing [D]	**8.33 mm**
Number of LEDs per 1 m	**120**
Number of LEDs per cut section	**15 pcs**
Max run length [L]	**10 m**
Energy consumption	**9.4 kWh/1000h**
Does not contain mercury and lead	**yes**
Dimmable	**yes**
No UV IR radiation	**yes**
Warranty [months]	**48**

Color temperature	Lumen output	Efficiency	Ref
3000 K	560 lm/m	46 lm/W	**KWP-GDL30-1229-24**
4000 K	589 lm/m	48 lm/W	**KWP-GDL40-1229-24**