
LED tape K-0960-24

Ref. K-0960-24

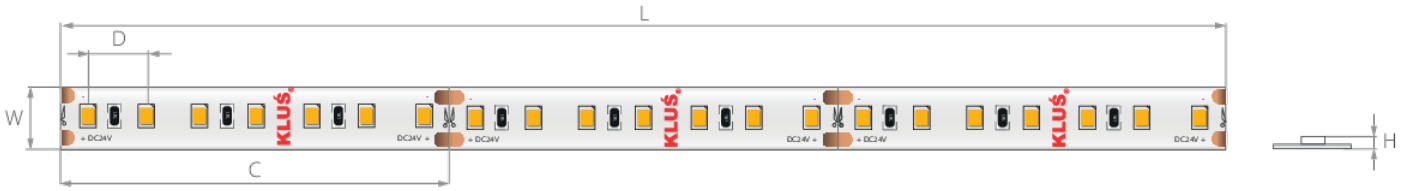

Dimensions: Width [W]: 8 mm | Height [H]: 1.6 mm | Max run length [L] : 7.5 m | Cut every [C]: 50 mm | LED spacing [D]: 6.25 mm

CRI 90+ | IP20 | 24 V | 7 YEARS WARRANTY

- CRI 90+
- Superior color consistency and dimming performance
- Smooth regulation of brightness

TECHNICAL SPECIFICATIONS

IP protection rating	20
CRI	90
Lumen output	1195 lm/m
LxBy	L80B50
Lifetime	60000 h
Working temperature	-20°C - 60°C
Input voltage	24 V DC
Power consumption	9.6 W/m
Beam angle	120°
MacAdam's ellipse	3 SDCM
Number of LEDs per 1 m	140
Number of LEDs per cut section	7 pcs
Energy consumption	10 kWh/1000h
Does not contain mercury and lead	yes
Closet Rated	yes
Dimmable	yes
No UV IR radiation	yes
Warranty [months]	84

Ref
K-40-0960-24
K-40-0960-24-R30

Color temperature	Efficiency
4000 K	124 lm/W

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS

LED tape K-0960-24

Ref. K-0960-24

Name	IP protection rating	Ref.
Controller RGB+CCT, Wlightbox NEW	20	E60235
Controller LED MONO\CCT\RGB\RGBW\RGBW+CCT, 5w1, SR5 NEW	20	E62159
Controller LED MONO, Wlightboxs 120W IP20	20	E60228

RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM

Name	IP protection rating	Ref.
Controller LED Casambi CBU-ASD	20	E62147
Controller LED Casambi CBU-PWM4	20	E62148