
LED tape K-NF-D1-1480-24

Ref. K-NF-D1-1480-24

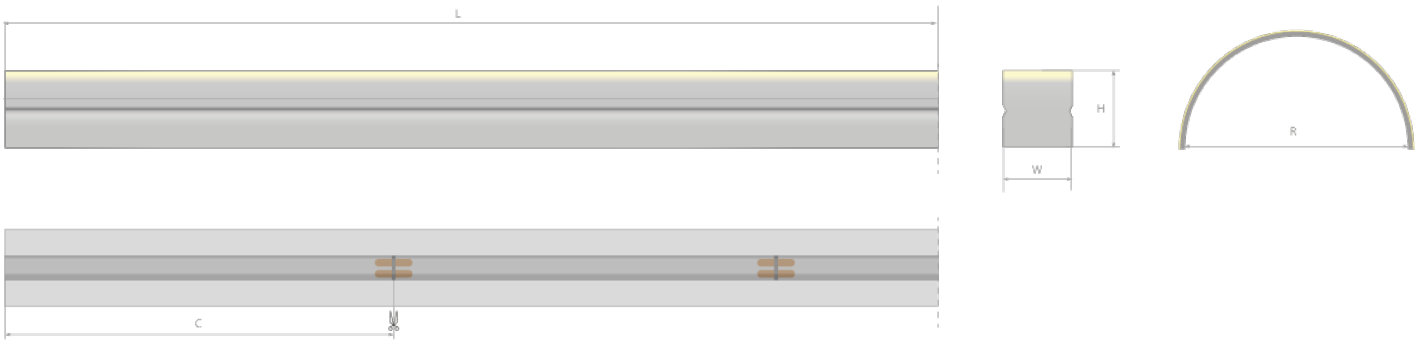

Dimensions: Width [W]: 16 mm | Height [H]: 17 mm | Max run length [L] : 10 m | Cut every [C]: 50 mm | LED spacing [D]: 7.14 mm

CRI 90+ | IP67 | 24 V | LISTED | RoHS COMPLIANT | 5 YEARS WARRANTY

- High flexibility, ease of bending and shaping the LED strip
- Small bending diameter
- Cut marks

ADDITIONAL INFORMATION

- warranty 3 years for outdoor applications
- warranty 5 years for indoor applications
- If the customer cuts the product themselves, the warranty is voided. Only the product cut and finished by KLUŚ is subject to warranty

TECHNICAL SPECIFICATIONS

IP protection rating	**67**
Sealing type	**neon flex**
CRI	**90**
Only valid for white	**yes**
Possibility of bending	**yes**
Downward light arc radius	**yes**
Down	**120 mm**
Working temperature	**-20°C - 50°C**
Input voltage	**24 V DC**
Power consumption	**14.8 W/m**
Beam angle	**112°**
Minimum bending radius R	**120 mm**
Number of LEDs per 1 m	**140**
Number of LEDs per cut section	**7 pcs**
Energy consumption	**15 kWh/1000h**
Does not contain mercury and lead	**yes**
No UV IR radiation	**yes**
Warranty [months]	**60**

Color temperature	Lumen output	Efficiency	Ref
3000 K	1130 lm/m	76 lm/W	**K-NF-30D1-1480-24**
4000 K	1152 lm/m	78 lm/W	**K-NF-40D1-1480-24**

LED tape K-NF-D1-1480-24

Ref. K-NF-D1-1480-24

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS

Name	IP protection rating	Ref.
Controller RGB+CCT, Wlightbox NEW	20	E60235
Controller LED MONO\CCT\RGB\RGBW\RGBW+CCT, 5w1, SR5 NEW	20	E62159
Controller LED MONO, Wlightboxs 120W IP20	20	E60228

RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM

Name	IP protection rating	Ref.
Controller LED Casambi CBU-ASD	20	E62147
Controller LED Casambi CBU-PWM4	20	E62148