
LED tape K-NF-RGBWS1-1400-24

Ref. K-NF-RGBWS1-1400-24





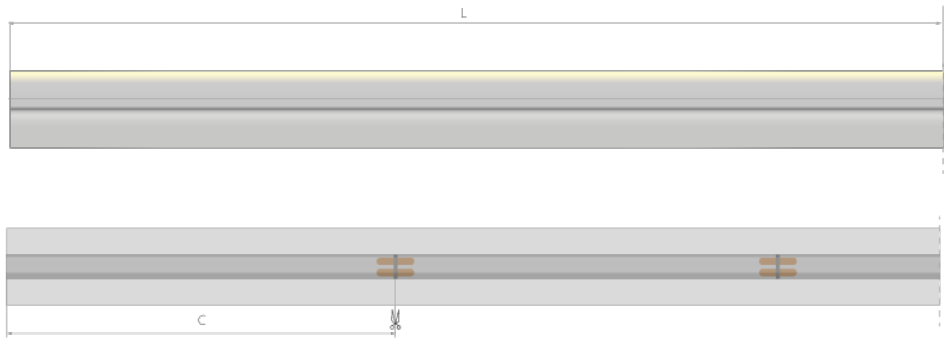

Dimensions: Width [W]: 16 mm | Height [H]: 17 mm | Max run length [L] : 5 m | Cut every [C]: 71.42 mm | LED spacing [D]: 8.33 mm

CRI 90+ | IP67 | cULus LISTED | CE | UKCA | RoHS COMPLIANT | 5 YEARS WARRANTY | G

- High flexibility, ease of bending and shaping the LED strip
- Small bending diameter
- Cut marks
- Outer coating resistant to dust and dirt

ADDITIONAL INFORMATION

- warranty 3 years for outdoor applications
- warranty 5 years for indoor applications
- If the customer cuts the product themselves, the warranty is voided. Only the product cut and finished by KLUŚ is subject to warranty

TECHNICAL SPECIFICATIONS

IP protection rating	**67**
Sealing type	**neon flex**
LED color	**RGB+W**
CRI	**90**
Only valid for white	**yes**
Lumen output	**430 lm/m** **98 lm/m** **277 lm/m** **57 lm/m**
Possibility of bending	**yes**
Radius of the light arc	**yes**
Inward	**120 mm**
Outdoor	**120 mm**
Power consumption	**14 W/m**
Number of LEDs per 1 m	**120**
Number of LEDs per cut section	**8 pcs**
Warranty [months]	**60**
Energy class	**G**

Color temperature	Efficiency
4000 K RED GREEN BLUE	**31 lm/W**

LED tape K-NF-RGBWS1-1400-24

Ref. K-NF-RGBWS1-1400-24

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS

Name	IP protection rating	Ref.
Controller RGB+CCT, Wlightbox NEW	20	E60235
Controller LED MONO\CCT\RGB\RGBW\RGBW+CCT, 5w1, SR5 NEW	20	E62159

RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM

Name	IP protection rating	Ref.
Controller LED Casambi CBU-ASD	20	E62147
Controller LED Casambi CBU-PWM4	20	E62148