LED tape K-RGB-1560-24

Ref. K-RGB-1560-24

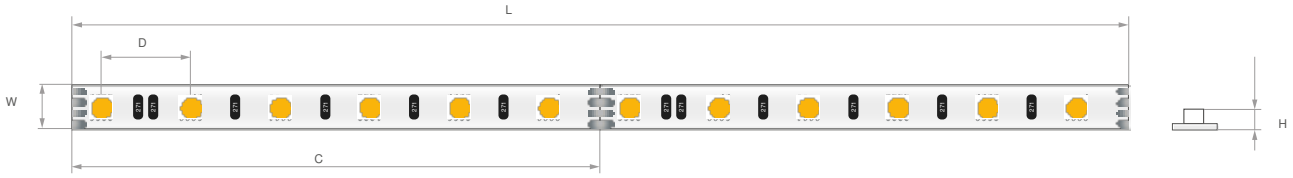

Dimensions: Width [W]: 6 mm | Height [H]: 2 mm | Max run length [L] : 3 m | Cut every [C]: 62.5 mm | LED spacing [D]: 10 mm

IP20 | 24 V | LISTED | RoHS COMPLIANT | 4 YEARS WARRANTY

- Narrow profile RGB Strip
- Millions of High Quality colors produced

TECHNICAL SPECIFICATIONS

IP protection rating	**20**
LED color	**RGB**
Lumen output	**660 lm/m** **145 lm/m** **430 lm/m** **85 lm/m**
LxBy	**L80B50**
Lifetime	**60000 h**
Working temperature	**-20°C - 60°C**
Input voltage	**24 V DC**
Power consumption	**15.6 W/m**
Beam angle	**120°**
Number of LEDs per 1 m	**96**

Number of LEDs per cut section	**6 pcs**
Does not contain mercury and lead	**yes**
Dimmable	**yes**
No UV IR radiation	**yes**
Warranty [months]	**48**

Color temperature	Efficiency
RED	**42 lm/W**
GREEN	**28 lm/W**
BLUE	**83 lm/W**
	16 lm/W

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS

Name	IP protection rating	Ref.
Controller RGB+CCT, Wlightbox NEW	20	E60235
Controller LED MONO\CCT\RGB\RGBW\RGBW+CCT, 5w1, SR5 NEW	20	E62159

RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM

LED tape K-RGB-1560-24

Ref. K-RGB-1560-24

Name	IP protection rating	Ref.
Controller LED Casambi CBU-ASD	20	E62147
Controller LED Casambi CBU-PWM4	20	E62148

RELATED ACCESSORIES > ELECTRONICS

Name	IP protection rating	Ref.
Power supply ND-30-24	66	ND-30-24
Power supply ND-60-24	66	ND-60-24
Power supply ND-96-24	66	ND-96-24