
LED tape K-CR-1275-24

Ref. K-CR-1275-24

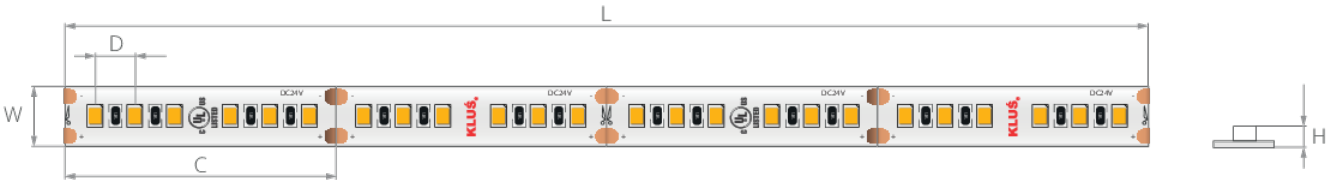

Dimensions: Width [W]: 8 mm | Height [H]: 1.5 mm | Max run length [L] : 10 m | Cut every [C]: 50 mm | LED spacing [D]: 8.3 mm

IP20 | CRI 95+ | 24 V | 7 YEARS WARRANTY

- UL Listed
- CRI 95+
- 3-Step MacAdam's ellipse, single binning
- Suitable for Installation in the Storage Area of a Clothes Closet

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS

Name	IP protection rating	Ref.
Controller RGB+CCT, Wlightbox NEW	20	E60235
Controller LED MONO\CCT\RGB\RGBW\RGBW+CCT, 5w1, SR5 NEW	20	E62159
Controller LED MONO, Wlightboxs 120W IP20	20	E60228

RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM

Name	IP protection rating	Ref.
Controller LED Casambi CBU-ASD	20	E62147
Controller LED Casambi CBU-PWM4	20	E62148

RELATED ACCESSORIES > ELECTRONICS > OTHER

Name	IP protection rating	Ref.
Connector C1-0W	20	E60920
Connector C2-1.5W	20	E60921

RELATED ACCESSORIES > ELECTRONICS

LED tape K-CR-1275-24

Ref. K-CR-1275-24

Name	IP protection rating	Ref.
Conductive connector EC-MP	20	EC-MP
Conductive connector C-SC-IP20	20	C-SC-IP20