
LED tape K-SE-0480-24

Ref. K-SE-0480-24

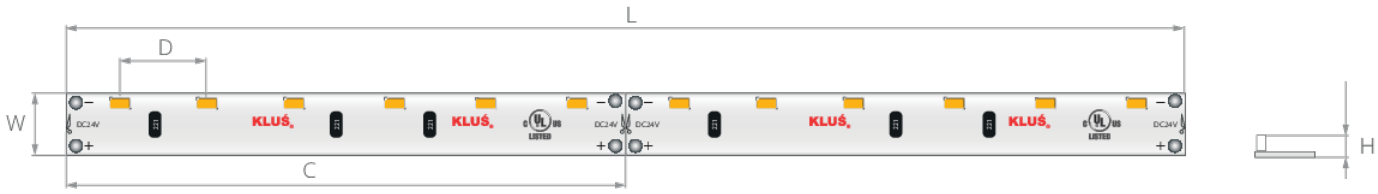

Dimensions: Width [W]: 5 mm | Height [H]: 2 mm | Max run length [L] : 6 m | Cut every [C]: 100 mm | LED spacing [D]: 16.7 mm

CRI 90+ | IP20 | Pb Hg | 24 V | c UL us LISTED | CE | UKCA | RoHS COMPLIANT | 5 YEARS WARRANTY

- Side emitting LED strip
- UL Listed
- CRI 90+
- 3-Step MacAdam's ellipse, single binning

TECHNICAL SPECIFICATIONS

IP protection rating	**20**
CRI	**90**
LxBy	**L80B50**
Lifetime	**50000 h**
Working temperature	**-20°C - 60°C**
Input voltage	**24 V DC**
Power consumption	**4.8 W/m**
Beam angle	**120°**
MacAdam's ellipse	**3 SDCM**
Number of LEDs per 1 m	**60**
Number of LEDs per cut section	**6 pcs**
Energy consumption	**5 kWh/1000h**
Does not contain mercury and lead	**yes**
Dimmable	**yes**
No UV IR radiation	**yes**
Warranty [months]	**60**

Color temperature	Lumen output	Efficiency	Ref
2700 K	310 lm/m	65 lm/W	**K-SE27-0480-24**
3000 K	335 lm/m	70 lm/W	**K-SE30-0480-24**
3500 K	355 lm/m	74 lm/W	**K-SE35-0480-24**
4000 K	370 lm/m	77 lm/W	**K-SE40-0480-24**
5000 K	395 lm/m	82 lm/W	**K-SE50-0480-24**

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS

Name	IP protection rating	Ref.
Controller RGB+CCT, Wlightbox NEW	20	E60235

LED tape K-SE-0480-24

Ref. K-SE-0480-24

Name	IP protection rating	Ref.
Controller LED MONO\CCT\RGB\RGBW\RGBW+CCT, 5w1, SR5 NEW	20	E62159
Controller LED MONO, Wlightboxs 120W IP20	20	E60228

RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM

Name	IP protection rating	Ref.
Controller LED Casambi CBU-ASD	20	E62147
Controller LED Casambi CBU-PWM4	20	E62148