
LED tape K-HEHD-0960-24

Ref. K-HEHD-0960-24

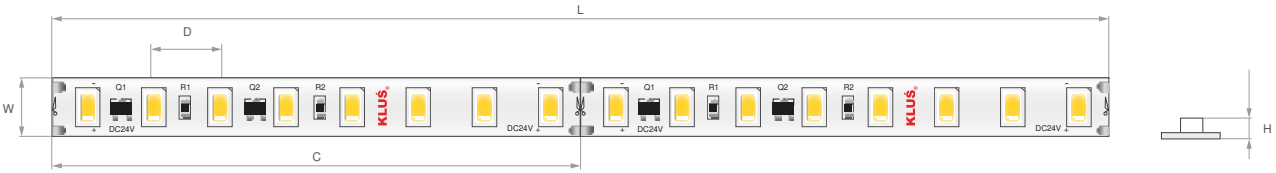

Dimensions: Width [W]: 10 mm | Height [H]: 1.6 mm | Max run length [L] : 7.3152 m | Cut every [C]: 50 mm | LED spacing [D]: 5.5 mm

IP20 | CRI 95+ | 24 V | cULus LISTED | CE | UKCA | RoHS COMPLIANT | 7 YEARS WARRANTY

- CRI 97 / R9 values up to 99
- Efficiency up to 128 lm|W
- Lumen output up to 1237 lm|m
- 3-Step MacAdam's ellipse, single binning
- Superior color consistency and dimming performance
- Suitable for Installation in the Storage Area of a Clothes Closet

TECHNICAL SPECIFICATIONS

IP protection rating	**20**
LED Series	**HE**
CRI	**95**
Lumen output	**1218 lm/m**
LxBy	**L80B50**
Lifetime	**60000 h**
Working temperature	**-30°C - 60°C**
Input voltage	**24 V DC**
Power consumption	**9.6 W/m**
Beam angle	**120°**

MacAdam's ellipse	**3 SDCM**
Number of LEDs per 1 m	**160**
Number of LEDs per cut section	**8 pcs**
Energy consumption	**10 kWh/1000h**
Does not contain mercury and lead	**yes**
Closet Rated	**yes**
Dimmable	**yes**
No UV IR radiation	**yes**
Warranty [months]	**84**

Color temperature	Efficiency
4000 K	**127 lm/W**

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS

Name	IP protection rating	Ref.
Controller RGB+CCT, Wlightbox NEW	20	E60235
Controller LED MONO\CCT\RGB\RGBW\RGBW+CCT, 5w1, SR5 NEW	20	E62159

Name	IP protection rating	Ref.
Controller LED MONO, Wlightboxs 120W IP20	20	E60228

RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM

Name	IP protection rating	Ref.
Controller LED Casambi CBU-ASD	20	E62147
Controller LED Casambi CBU-PWM4	20	E62148