
LED tape K-RGB-0700-24V

Ref. K-RGB-0700-24V

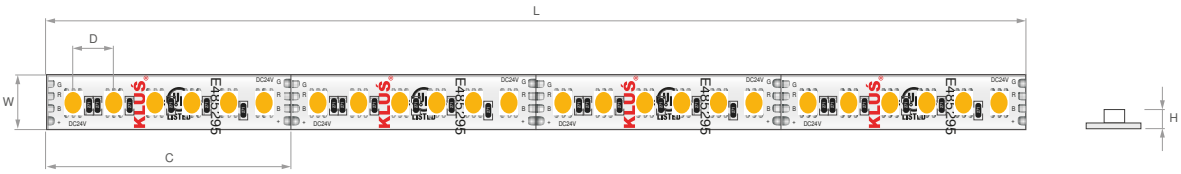

Dimensions: Width [W]: 8 mm | Height [H]: 2.5 mm | Max run length [L] : 5 m | Cut every [C]: 50 mm | LED spacing [D]: 8.3 mm

IP20 | Pb Hg | 24 V | c UL us LISTED | CE | UKCA | RoHS COMPLIANT | 4 YEARS WARRANTY

- UL Listed

TECHNICAL SPECIFICATIONS

IP protection rating	**20**
LED color	**RGB**
Lumen output	**40.6 lm/m** **14.6 lm/m** **20.5 lm/m** **5.5 lm/m**
LxBy	**L80B50**
Lifetime	**60000 h**
Working temperature	**-20°C - 60°C**
Input voltage	**24 V DC**
Power consumption	**7 W/m**
Beam angle	**120°**
Number of LEDs per 1 m	**120**
Number of LEDs per cut section	**6 pcs**

Energy consumption	**20 kWh/1000h**
Does not contain mercury and lead	**yes**
Dimmable	**yes**
No UV IR radiation	**yes**
Warranty [months]	**48**

Color temperature	Efficiency
RED GREEN BLUE	**6 lm/W**

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS

Name	IP protection rating	Ref.
Controller RGB+CCT, Wlightbox NEW	20	E60235
Controller LED MONO\CCT\RGB\RGBW\RGBW+CCT, 5w1, SR5 NEW	20	E62159

RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM

LED tape K-RGB-0700-24V

Ref. K-RGB-0700-24V

Name	IP protection rating	Ref.
Controller LED Casambi CBU-ASD	20	E62147
Controller LED Casambi CBU-PWM4	20	E62148