LED tape K-SEBLUE-1210-24-8

Ref. K-SEBLUE-1210-24-8

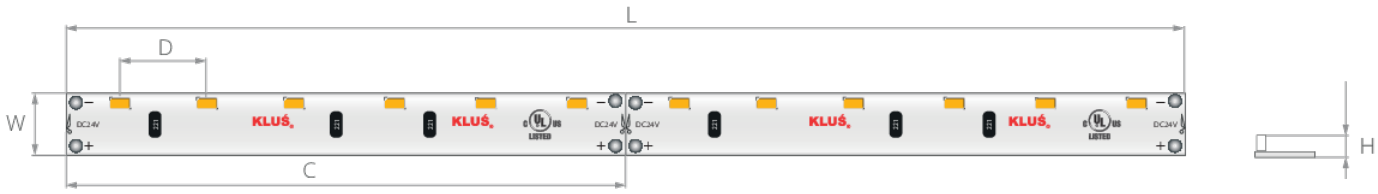

Dimensions: Width [W]: 8 mm | Height [H]: 2 mm | Max run length [L] : 6 m | Cut every [C]: 100 mm | LED spacing [D]: 16.7 mm

IP20 | Pb Hg | 24 V | c UL us LISTED | CE | UKCA | RoHS COMPLIANT | 4 YEARS WARRANTY

- Side emitting LED strip
- UL Listed

TECHNICAL SPECIFICATIONS

IP protection rating	20
LED color	BLUE
Lumen output	99 lm/m
Working temperature	-20°C - 60°C
Input voltage	24 V DC
Power consumption	4.8 W/m
Beam angle	120°

MacAdam's ellipse	3 SDCM
Number of LEDs per 1 m	60
Number of LEDs per cut section	6 pcs
Energy consumption	5 kWh/1000h
Does not contain mercury and lead	yes
Dimmable	yes
No UV IR radiation	yes
Warranty [months]	48

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS

Name	IP protection rating	Ref.
Controller RGB+CCT, Wlightbox NEW	20	E60235
Controller LED MONO, Wlightboxs 120W IP20	20	E60228

RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM

Name	IP protection rating	Ref.
Controller LED Casambi CBU-ASD	20	E62147
Controller LED Casambi CBU-PWM4	20	E62148