
LED tape KWP-5K-0910-24 9.1 W/m, IP65

Ref. KWP-5K-0910-24

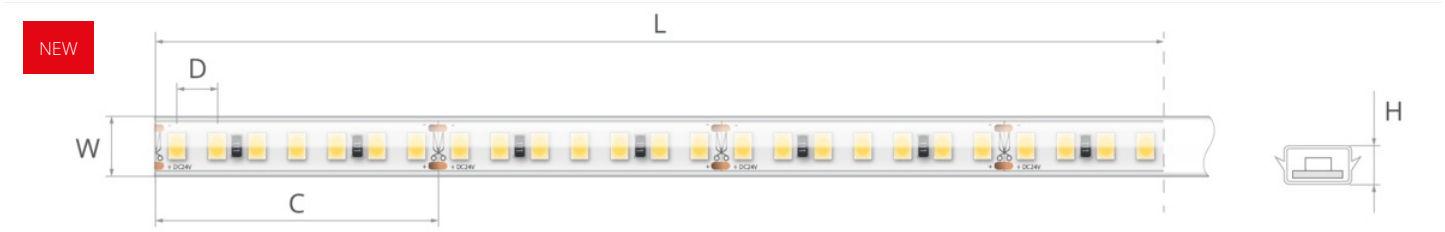

Dimensions: Width [W]: 8 mm | Height [H]: 2.7 mm | Max run length [L] : 3 m | Cut every [C]: 35.7 mm | LED spacing [D]: 5.1 mm

CRI 90+ | IP65 | 24 V | c UL us LISTED | CE | UKCA | RoHS COMPLIANT | 4 YEARS WARRANTY

- High density diode placement
- CRI 90+
- High light transmission of the silicone sleeve (over 93%)

TECHNICAL SPECIFICATIONS

IP protection rating	**65**
Sealing type	**silicone sleeve**
CRI	**90**
LxBy	**L80B50**
Lifetime	**60000 h**
Working temperature	**-20°C - 60°C**
Input voltage	**24 V DC**
Power consumption	**9.1 W/m**
MacAdam's ellipse	**3 SDCM**
Number of LEDs per 1 m	**196**
Number of LEDs per cut section	**6 pcs**
Warranty [months]	**48**

Color temperature	Lumen output	Efficiency	Ref
2700 K	725 lm/m	80 lm/W	**KWP-5K27-0910-24**
3000 K	740 lm/m	81 lm/W	**KWP-5K30-0910-24**
3500 K	820 lm/m	90 lm/W	**KWP-5K35-0910-24**
4000 K	860 lm/m	95 lm/W	**KWP-5K40-0910-24**
5000 K	860 lm/m	95 lm/W	**KWP-5K50-0910-24**

RELATED ACCESSORIES > RELATED LED > ULTRATHIN

Name	IP protection rating	Power consumption	Ref.
LED tape K-0910-24 9.1 W/m, IP20 NEW	20	9.1 W/m	K-27-0910-24 K-30-0910-24 K-35-0910-24 K-40-0910-24 K-50-0910-24