
LED tape K-VBT-0720-24

Ref. K-VBT-0720-24

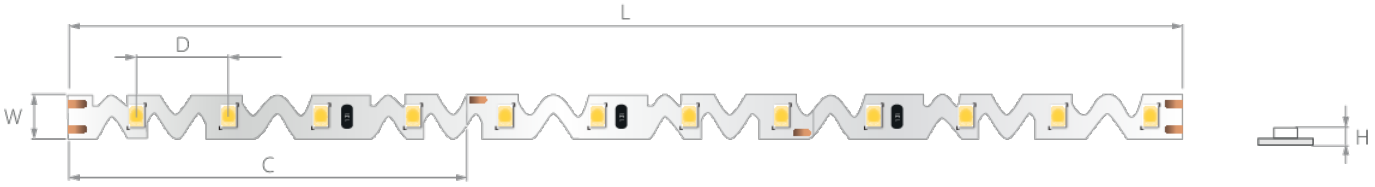

Dimensions: Width [W]: 6.5 mm | Height [H]: 2 mm | Max run length [L] : 3 m | Cut every [C]: 55.3 mm | LED spacing [D]: 13.9 mm

CRI 90+ | IP20 | Pb Hg | 24 V | c UL us LISTED | CE | UKCA | RoHS COMPLIANT | 5 YEARS WARRANTY

- UL Listed
- CRI 90+
- High lighting efficacy

TECHNICAL SPECIFICATIONS

IP protection rating	**20**
CRI	**90**
LxBy	**L80B50**
Lifetime	**60000 h**
Possibility of bending	**yes**
Working temperature	**-20°C - 60°C**
Input voltage	**24 V DC**
Power consumption	**7.2 W/m**
Beam angle	**120°**
MacAdam's ellipse	**3 SDCM**
Number of LEDs per 1 m	**72**
Number of LEDs per cut section	**3 pcs**
Energy consumption	**8 kWh/1000h**
Does not contain mercury and lead	**yes**
Dimmable	**yes**
No UV IR radiation	**yes**
Warranty [months]	**60**

Color temperature	Lumen output	Efficiency	Ref
2700 K	1060 lm/m	147 lm/W	**K-VBT27-0720-24**
3000 K	1070 lm/m	149 lm/W	**K-VBT30-0720-24**
3500 K	1085 lm/m	151 lm/W	**K-VBT35-0720-24**
4000 K	1110 lm/m	154 lm/W	**K-VBT40-0720-24**
5000 K	1100 lm/m	153 lm/W	**K-VBT50-0720-24**

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS

Name	IP protection rating	Ref.

LED tape K-VBT-0720-24

Ref. K-VBT-0720-24

Name	IP protection rating	Ref.
Controller RGB+CCT, Wlightbox NEW	20	E60235
Controller LED MONO\CCT\RGB\RGBW\RGBW+CCT, 5w1, SR5 NEW	20	E62159
Controller LED MONO, Wlightboxs 120W IP20	20	E60228

RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM

Name	IP protection rating	Ref.
Controller LED Casambi CBU-ASD	20	E62147
Controller LED Casambi CBU-PWM4	20	E62148