
LED tape KWP-14KBLUE-1210-24

Ref. KWP-14KBLUE-1210-24

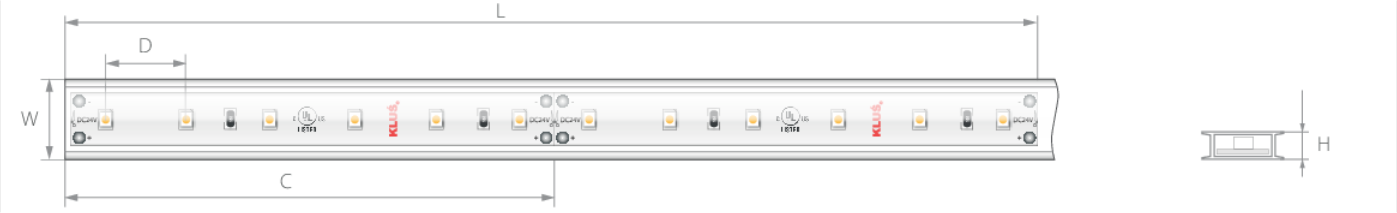

Dimensions: Width [W]: 16.7 mm | Height [H]: 4.6 mm | Max run length [L] : 7.3 m | Cut every [C]: 100 mm | LED spacing [D]: 16.7 mm

IP65 | Pb Hg | 24 V | c UL us LISTED | CE | UKCA | RoHS COMPLIANT | 4 YEARS WARRANTY

- UL Listed
- For the construction of sealed lighting fixtures
- High light transmission of the silicone sleeve (over 93%)

TECHNICAL SPECIFICATIONS

IP protection rating	65
Sealing type	silicone sleeve
LED color	BLUE
Lumen output	92 lm/m
Working temperature	-20°C - 60°C
Input voltage	24 V DC
Power consumption	4.8 W/m

Beam angle	120°
MacAdam's ellipse	3 SDCM
Number of LEDs per 1 m	60
Number of LEDs per cut section	6 pcs
Does not contain mercury and lead	yes
Dimmable	yes
No UV IR radiation	yes
Warranty [months]	48

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS

Name	IP protection rating	Ref.
Controller RGB+CCT, Wlightbox NEW	20	E60235
Controller LED MONO, Wlightboxs 120W IP20	20	E60228

RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM

Name	IP protection rating	Ref.
Controller LED Casambi CBU-ASD	20	E62147
Controller LED Casambi CBU-PWM4	20	E62148