
# LED tape K-VHE-0480-24

Ref. K-VHE-0480-24

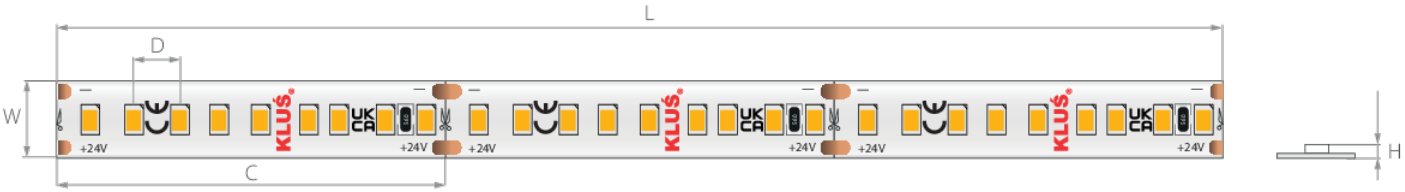


Dimensions: Width [W]: 10 mm | Height [H]: 1.6 mm | Max run length [L] : 5.5 m | Cut every [C]: 50 mm | LED spacing [D]: 5.56 mm

CRI 90+ | IP20 | Pb Hg | 24 V | c UL us LISTED | CE | UKCA | RoHS COMPLIANT | 7 YEARS WARRANTY

- High lighting efficacy
- Energy class: C

## TECHNICAL SPECIFICATIONS

| | |
|---|---|
| IP protection rating | **20** |
| CRI | **90** |
| LxBy | **L80B50** |
| Lifetime | **100000 h** |
| Working temperature | **-20°C - 60°C** |
| Input voltage | **24 V DC** |
| Power consumption | **4.8 W/m** |
| Beam angle | **120°** |
| MacAdam's ellipse | **3 SDCM** |
| Number of LEDs per 1 m | **180** |
| Number of LEDs per cut section | **9 pcs** |
| Energy consumption | **4.8 kWh/1000h** |
| Does not contain mercury and lead | **yes** |
| Dimmable | **yes** |
| No UV IR radiation | **yes** |
| Warranty [months] | **84** |

| Color temperature | Lumen output | Efficiency | Ref |
|---|---|---|---|
| 2700 K | 720 lm/m | 150 lm/W | **K-VHE27** |
| 3000 K | 765 lm/m | 159 lm/W | **K-VHE30** |
| 3500 K | 790 lm/m | 165 lm/W | **K-VHE35** |
| 4000 K | 800 lm/m | 167 lm/W | **K-VHE40** |
| 5000 K | 815 lm/m | 170 lm/W | **K-VHE50** |

## RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS

| Name | IP protection rating | Ref. |
|---|---|---|
| Controller RGB+CCT, Wlightbox NEW | 20 | E60235 |

# LED tape K-VHE-0480-24

## Ref. K-VHE-0480-24

| Name | IP protection rating | Ref. |
|---|---|---|
| Controller LED MONO\CCT\RGB\RGBW\RGBW+CCT, 5w1, SR5 NEW | 20 | E62159 |
| Controller LED MONO, Wlightboxs 120W IP20 | 20 | E60228 |

**RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM**

| Name | IP protection rating | Ref. |
|---|---|---|
| Controller LED Casambi CBU-ASD | 20 | E62147 |
| Controller LED Casambi CBU-PWM4 | 20 | E62148 |