# LED tape KWP-8K-1275-24

Ref. KWP-8K-1275-24

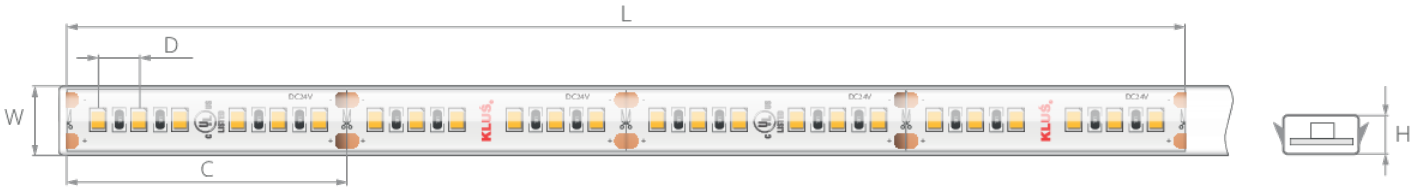


Dimensions: Width [W]: 10 mm | Height [H]: 4 mm | Max run length [L] : 7.3 m | Cut every [C]: 50 mm | LED spacing [D]: 8.3 mm

CRI 90+ | IP65 | Pb Hg | 24 V | c UL us LISTED | CE | UKCA | RoHS COMPLIANT | 4 YEARS WARRANTY

- Sealed LED strip, easily installed in and removed from dedicated extrusions ("KLIK" system)
- Instant and clean service of a sealed LED strip, without tools or adhesives
- UL Listed
- CRI 90+
- 3-Step MacAdam's ellipse, single binning
- High light transmission of the silicone sleeve (over 93%)

## APPLICATION

- for the construction of lighting fixtures operating in damp environments

## MOUNTING

- to the profile, by pressing

## ADDITIONAL INFORMATION

- NOTE! LED tapes in a silicone sleeve, with a degree of protection IP65 are made to the size specified by the customer only by KLUŚ - if you cut it yourself, the tape will become unsealed, which will result in the loss of the warranty
- the luminous flux applies to unsealed LED strip

## RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS

| Name | IP protection rating | Ref. |
|---|---|---|
| Controller RGB+CCT, Wlightbox NEW | 20 | E60235 |
| Controller LED MONO\CCT\RGB\RGBW\RGBW+CCT, 5w1, SR5 NEW | 20 | E62159 |
| Controller LED MONO, Wlightboxs 120W IP20 | 20 | E60228 |

## RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM

| Name | IP protection rating | Ref. |
|---|---|---|
| Controller LED Casambi CBU-ASD | 20 | E62147 |
| Controller LED Casambi CBU-PWM4 | 20 | E62148 |